



Datenblatt - Fiche technique - Data sheet


21.99.1965




VALUE S/FTP-Patchkabel Kat.6A, schwarz, 5,0 m

Cordon VALUE Cat.6A / 10 Gigabit S/FTP, noir, 5,0 m

VALUE S/FTP Patch Cord Cat.6A, black, 5.0 m

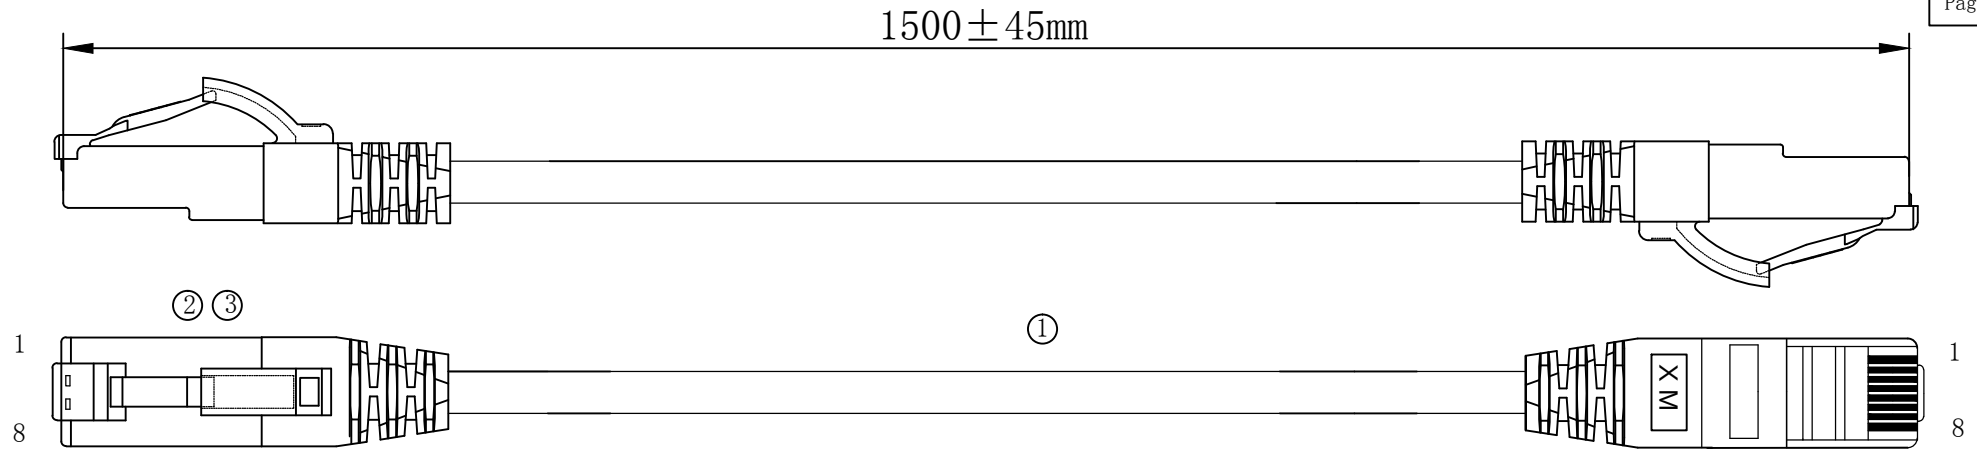

WIRING DIAGRAM(568B)

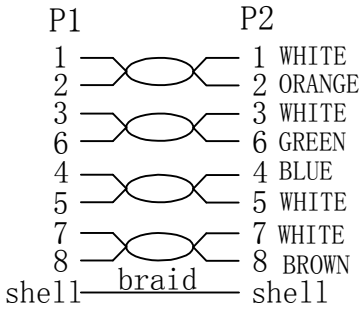

NOTE:

- 1. ELECTRICAL TEST:
 - (1).100% OPEN SHORT, MISS WIRE TEST
 - (2). INSULATION RESISTANCE:DC 300V 10MΩ ;
 - (3). CONDUCTOR RESISTANCE:3Ω Max (More than 3m, add one ohm per meter) ;
- 2. Fluke channel link test:
TEST LIMIT:ISO11801 Channel Class Ea
- 3. PRINT WORD:
CAT.6A S/FTP LSZH 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2
- 4. ROHS2.0 & REACH COMPLIANT
- 5. Minimum of the bending radius is 50mm
(Suitable for all meters)

MATERIAL LIST

③	OVER MOLD	PVC 75A SEE THE CHART	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug, Pin Gold Plated 3u", Shell Nickel Plating , Transparence blue	2	
①	CABLE	S/FTP CAT. 6A 27AWG (7/0.135Bare Copper*1P+AL-FOIL)*4PAIRS+BRAID (5*16/0.12mmAL-MG) COLOUR:BLACK/BALCK 3C JACKET:LSZH OD:6.2±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
		NEW		2016-07-20 A
BY	CHK	REVISION RECORD MODIFICATION		DATE REV.

ITEM NO.	PANTONE COLOUR
21.99.1990	Warm Gray 3C
21.99.1991	Red 199C
21.99.1992	Yellow 135C
21.99.1993	Green 3278C
21.99.1994	Blue 647C
21.99.1995	Black 3C
21.99.1996	White

ITEM NO.	21.99.1990	21.99.1991	21.99.1992	21.99.1993	21.99.1994
	21.99.1995	21.99.1996			
DESC.	VALUE S/FTP CAT. 6a Patch Cord 1.5m				

SECOMP