



CPU Cooler
Dissipateur pour CPU / CPU Kühler /
Disipador de CPU / CPU kylene

KABUTO II

兜貳



KABUTO II - TECHNICAL DATA

Weight	695 g / 24.52 oz (incl. fan)
Dimensions (WxDxH)	132 x 140 x 130 mm / 5.20 x 5.51 x 5.12 in
Fan Dimensions	120 x 120 x 25 mm / 4.72 x 4.72 x 0.98 in
Fan Speed	0 (+300 upm) ~ 1.300 rpm (±10%)
Noise Level	0 ~ 26.1 dBA
Air Flow	20.53 ~ 73.39 CFM 34.87 ~ 124.68 m³/h
Compatibility	Intel LGA775/1155/1156/1366/2011 AMD Socket AM2/AM2+/AM3/AM3+/FM1/FM2


KABUTO II - ACCESSORY

Mounting screws, mounting clips, fan clips,
thermal grease, wrench, installation manual

Kabuto II Product Specifications


Top-Mount Cooler

The Kabuto II is a top-flow cooler. The layout of this structure makes it possible to not only cool the CPU, but at the same time make sure that components like the chipsets and MOS-FETs on VR modules are actively cooled down as well.



Unique reinforcement bar

The Kabuto II is fitted with a reinforcement bar providing improved structural strength to maintain uniform heat pipe alignment achieving even better cooling performance.

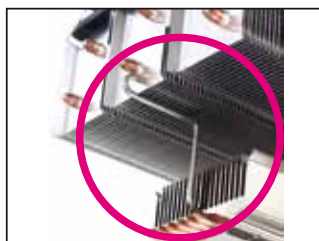


Introducing the new GlideStream

With the Kabuto II, Scythe introduces the all-new Original GlideStream PWM Silent fan. Special features of this series include grooved blades contributing to less air resistance, and rubber inlays on all four mounting holes to absorb noise and vibrations.



New Generation Clip System - N.G.C.S

The Kabuto II is fitted with the proven "New Generation Clip System", known from the Katana 4. This further developed version of the reliable Scythe mounting system combines user friendliness with durability.

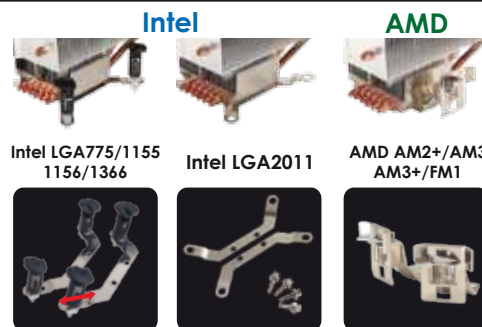

Package Weight	Net: 166 g / 5.85 oz Gross: 968 g / 34.14 oz
Package Dimensions	146.2 x 148.4 x 217.8 mm / 5.75 x 5.8 x 8.57 in
Carton Info W x D x H	10 pcs. / 11.8 kg / 26 lbs 860 x 400 x 210 mm / 33.85 x 15.74 x 8.26 in

Item Number	SCKBT - 2000
EAN	4571225050546
UPC	894092004378



Scythe EU GmbH

Willinghusener Weg 5c
22113 Oststeinbek / Germany

Service/Support

Tel: +49 (0) 40 822 459 88 - 0
Fax: +49 (0) 40 822 459 88 - 99
E-Mail: sales@scythe.com

www.scythe.com