




QUICK START GUIDE

**Universal Travel Adapter GaN III with
2 x USB-C® PD 65W & QC 4+ / 2 x USB-A
UTA-05**

How it works

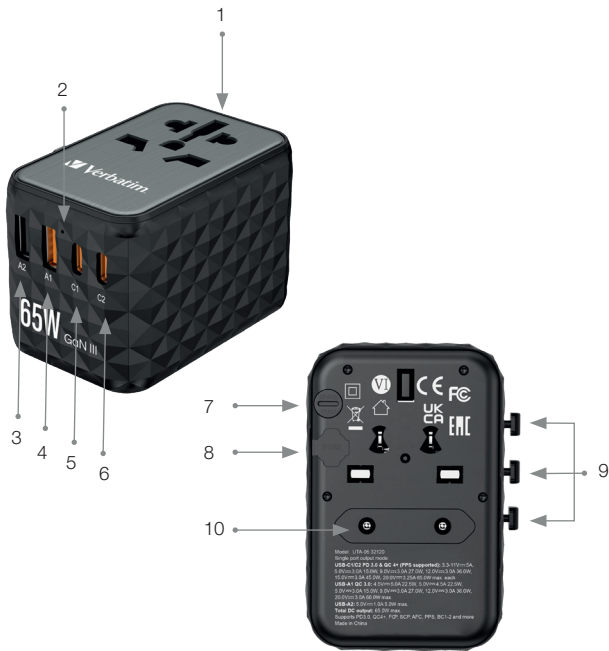

1. Multi-socket with safety shutter for child protection
2. Status LED
3. USB-A2 5.0W
4. USB-A1 QC 3.0 60W
5. USB-C1 65W PD 3.0 & QC 4+
6. USB-C2 65W PD 3.0 & QC 4+
7. Spare fuse
8. Fuse
9. Adapter plug switches
10. Multi-plug

Connecting

- Please insert the adapter into the socket. The Status LED will light up.
If not, please check fuse.
- Then insert the plug of your device into the adapter.

a.



b.



Connectivity


- The following plug types are accepted by the adapter:



Type A



Type B



Type C



Type E



Type F



Type G



Type I



Type J




Type L



Type N

Please notice that following plugs are not compatible:



Type D




Type H



Type K




Type M



Type O

2. You can plug the travel adapter into the following Type outlets.

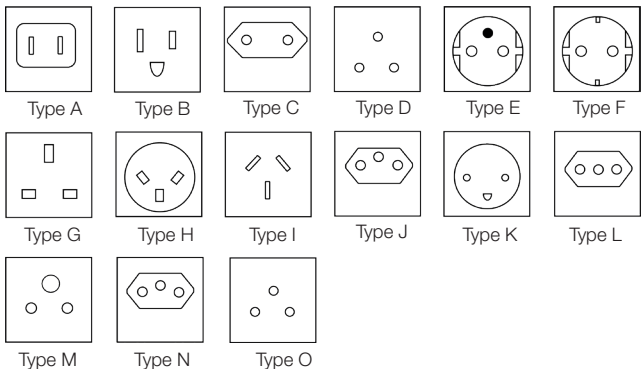

Please find a full list of country compatibility on the related product page on our website.

2-POLE UNEARTHED DEVICES

The travel adapter is suitable for use with most electronic devices up to 2500W at 250V and 1000W at 100V.



The travel adapter is compatible with most USB devices.




Attention


Before use, move all sliders on the side completely back into their starting positions.

Selecting your plug


Find the power outlet of the country you want to plug your device into. The country outlets are shown next to the plugs.




Use EU Plug



Use UK Plug



Use USA Plug




Use AUS Plug

1. Gently press the required slider and move it forward to the other side, until the plug comes completely out and locks.
2. Recover the plug: Please press and hold the slider. Release the hold position and continue to slide it back to the other side, until the plug is pushed completely back inside of the adapter.
3. For AUS only: Turn the two connector contacts outwards until they form an inverted „V“.
4. Now you can connect the adapter to the socket.

Changing the fuse

The travel adapter is equipped with a fuse, which automatically switches off if the adapter is overloaded. This happens when the current input from the socket exceeds 10A or the terminal used requires more than 2500W at 250V or 1000W at 110V.





Before removing the fuse, unplug the travel adapter from the socket and disconnect all connected devices. If device was flooded with water or is wet, do not use until fully dried.

1. Pull out the fuse holder and remove the fuse.
2. Firmly press and turn the spare fuse cover and remove the spare fuse.
3. Place the spare fuse in the fuse holder and stick it back into the adapter.
4. Close the replacement cover.
5. Don't forget to get a new replacement fuse. Replacement fuse: 250V 10A, BS1362 approved.

Safety Instructions

- Protect the product from dirt, moisture and overheating and use it in dry rooms only.
- Do not drop the product and do not expose it to any major shocks.
- Do not operate the product outside the power limits given in the specifications.
- Use the product only for the intended purpose.
- As with all electrical products, this device should be kept out of the reach of children.
- Do not use the product in the immediate vicinity of heaters, other heat sources or in direct sunlight.
- Keep the packaging in a safe place for future reference. It contains important information.
- The product is intended only for use inside buildings.
- Only use the article under moderate climatic conditions (0°C-35°C, humidity below 80%).
- Do not use the product in areas in which electronic products are not permitted.
- Do not use the product in a damp environment and avoid splashing water.

Operation Warnings

Risk of electric shock

- Do not open the device or continue to operate it if it becomes damaged.
- Before connecting a device, check whether it is suitable for the voltage/mains frequency available in the country.
- Do not operate the product continuously, as it is not designed for this.
- Do not continue to operate the product if it is visibly damaged.
- The product is not designed for operation with other adapters.

Care and maintenance

- Disconnect the device from the mains before cleaning and during prolonged periods of non-use.
- Only operate the product from a socket that has been approved for the device. Plug devices directly into the adapter and the adapter directly into the socket.
- To disconnect please remove all devices from the adapter before removing the adapter from the socket.

Specifications

- AC Input: 100V-250V,50/60Hz
- Rating: 100-250V~ 10A max., 2500W max.
Single port output mode:
- USB-C1/C2 PD 3.0 & QC 4+ (PPS supported): 3.3 - 11 V = 5 A, 5.0V = 3.0A, 9.0V = 3.0A, 12.0V = 3.0A, 15.0V = 3.0A, 20.0V = 3.25A 65.0W max.
- USB-A1 QC 3.0: 4.5V = 5.0A, 5.0V = 4.5A, 5.0V = 3.0A, 9.0V = 3.0A , 12.0V = 3.0A, 20.0V = 3.0A 60.0W max.
- USB-A2: 5.0V = 1.0A 5.0W max.
Combined output mode:
- USB-C1+C2 output mode:
- USB-C1: 5.0V = 3.0A, 9.0V = 2.22A, 12.0V = 1.67A 20.0W max.
- USB-C2: 5.0V = 3.0A, 9.0V = 3.0A, 12.0V = 3.0A, 15.0V = 3.0A, 20.0V = 2.25A 45.0W max.
- USB-C1+C2+A2 output mode:
- USB-C1: 5.0V = 3.0A, 9.0V = 2.22A, 12.0V = 1.67A 20.0W max.
- USB-C2: 5.0V = 3.0A, 9.0V = 3.0A, 12.0V = 3.0A, 15.0V = 3.0A, 20.0V = 2.25A 45.0W max.
- USB-A2: 5.0V = 1.0A 5.0W max.
- USB-C1+C2+A1+A2 output mode:
- USB-C1+A1: 5.0V = 3.0A 15.0W max.
- USB-C2: 5.0V = 3.0A, 9.0V = 3.0A, 12.0V = 3.0A, 15.0V = 3.0A, 20.0V = 2.25A 45.0W max.
- USB-A2: 5.0V = 1.0A 5.0W max.
- Total DC Output: 65.0W max.
- Operating Temperature: 0 - 35°C
- Supports PD3.0, QC4+, FCP, SCP, AFC, PPS, BC1-2 and more
- Fuse: 10A BS1362 compliant
- Safety shutter for child protection (can only be opened with force of more than 75N (7.5Kg) per hole)
- Dimensions: 78mm x 55mm x 54mm
- Weight: 177g

CAUTION

- Before use, please read this instruction carefully! This product does not convert voltage (AC-AC), to avoid possible damage to your device or other safety hazards, please make sure the power outlet you intend to use has the proper voltage to run your device before using this adapter.
- Each country has its own regulations regarding the use of travel adapters, please check in each country before use.
- No grounding: This product is for use with unearthed or double insulated appliances only.
- Indoor use only.



CAUTION

Misuse can lead to electrical shock.

Verbatim Limited Warranty Terms

Verbatim warrants this product to be free from defects in material and workmanship for a period of 2 years from date of purchase. This warranty excludes batteries. If this product is found to be defective within the warranty period, it will be replaced at no cost to you. You may return it with your original cash register receipt to the place of purchase or contact Verbatim. Product replacement is your sole remedy under this warranty, and this warranty does not apply to normal wear or to damage resulting from abnormal use, misuse, abuse, neglect or accident, or to any incompatibility or poor performance due to the specific computer software or hardware used.

VERBATIM WILL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES, HOWEVER CAUSED, FOR BREACH OF WARRANTIES OR OTHERWISE.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state or country to country.

Note

Verbatim may at any time revise the content of this user guide without further notice.

Rights

Copyright © 2023 Verbatim. No part of this document may be reproduced in any form or by any means, for any purpose, without the express written permission of Verbatim. All rights reserved.

All other brands and product names referenced herein are property of their respective owners.

CE Declaration

Complies with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility (2014/30/EC), Low Voltage Directive (2014/35/EC) and General Product Safety Directive (2001/95/EC).

This declaration applies to all specimens manufactured identical to the model submitted for testing/evaluation.

EN 55032:2015/A11:2020

EN 55035:2017/A11: 2020

EN IEC 61000-3-2: 2019/A1:2021

EN 61000-3-3:2013/A1:2019

EN IEC 62368-1:2020+A11:2020

RoHS Compliance


This product is in compliance with Directives 2011/65/EU and 2015/683 of the European Parliament and of the Council of 18th December 2006, on the restriction of the use of hazardous substances in electrical and electronic equipment (RoHS) and its amendments.

Substances of Very High Concern (SVHC) including 235 substances contained in Candidate List of June 14th 2023 are not present in this product range above permitted levels.

WEEE Notice

The Directive on Waste Electrical and Electronic Equipment (WEEE), which entered into force as European law on 13th February 2003, resulted in a major change in the treatment of electrical equipment at end-of-life.

The WEEE logo (shown at the left) on the product or on its box indicates that this product must not be disposed of or dumped with your other household waste. For more information about electronic and electrical waste equipment

 disposal, recovery, and collection points, please contact your local municipal household waste disposal service or shop from where you purchased the equipment.

FCC Compliance

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Technical Support and Documentation

- Ⓔ To download the user manual, access frequently asked questions or contact the Verbatim support team, please go to – www.verbatim.com/support.
- Ⓕ Pour télécharger le manuel d'utilisation, accéder aux questions fréquemment posées ou contacter l'équipe d'assistance Verbatim, veuillez vous rendre sur – www.verbatim.com/support.
- Ⓖ Um die Betriebsanleitung herunterzuladen, auf häufig gestellte Fragen zuzugreifen oder das Verbatim-Supportteam zu kontaktieren, gehen Sie bitte auf – www.verbatim.com/support.
- Ⓝ Om de gebruikershandleiding te downloaden, veegestelde vragen te raadplegen of contact op te nemen met het Verbatim-ondersteuningsteam, gaat u naar – www.verbatim.com/support.
- Ⓣ Per scaricare il manuale utente, vedere le risposte alle domande più frequenti o contattare il team di Assistenza Verbatim, visita la pagina – www.verbatim.com/support.
- Ⓔ Para descargar el manual de usuario, acceder a las preguntas más frecuentes o ponerse en contacto con el equipo de asistencia de Verbatim, visite – www.verbatim.com/support.
- Ⓣ Para descarregar o manual do utilizador, aceder às perguntas mais frequentes ou contactar a equipa de apoio Verbatim, por favor vá a – www.verbatim.com/support.
- Ⓛ Aby pobrać instrukcję obsługi, uzyskać odpowiedzi na często zadawane pytania lub skontaktować się z zespołem pomocy technicznej, proszę przejść na stronę www.verbatim.com/support.
- Ⓡ Чтобы загрузить руководство пользователя, ознакомиться с часто задаваемыми вопросами или связаться со службой поддержки Verbatim, перейдите по адресу – www.verbatim.com/support.
- Ⓒ Chcete-li si stáhnout uživatelskou příručku, získat přístup k často kladeným otázkám nebo kontaktovat tým podpory společnosti Verbatim, přejděte na stránku – www.verbatim.com/support.
- Ⓜ A felhasználói kézikönyv letöltéséhez, a gyakran ismételt kérdések eléréséhez vagy a Verbatim ügyfélszolgálatával való kapcsolatfelvételhez kérjük, látogasson el a www.verbatim.com/support weboldalra.
- ⓇⓈ Za preuzimanje korisničkog priručnika, pristupite često postavljanim pitanjima ili kontaktirajte Verbatim tim za podršku, idite na – www.verbatim.com/support.
- Ⓚ Ak si chcete stiahnuť používateľskú príručku, získať prístup k často kladeným otázkam alebo kontaktovať tím podpory spoločnosti Verbatim, prejdite na – www.verbatim.com/support.

® Pentru a descărca manualul de utilizare, pentru a accesa întrebările frecvente sau pentru a contacta echipa de asistență Verbatim, vă rugăm să accesați – www.verbatim.com/support.

® Kullanım kılavuzunu indirmek, sık sorulan sorulara erişmek veya Verbatim destek ekibiyle iletişime geçmek için lütfen şu adrese gidin – www.verbatim.com/support.

® 需下載產品使用手冊、發生常見問題解答或聯繫 Verbatim 的支援團隊，請登入 – www.verbatim.com/support.

® 需下载产品使用手册、发生常见问题解答或联系 Verbatim 的支援团队，请登入 – www.verbatim.com/support.

® 사용 설명서를 다운로드하거나 자주 묻는 질문에 액세스하거나 Verbatim 지원 팀에 문의하려면 www.verbatim.com/support로 이동하십시오.

® ユーザーマニュアルのダウンロード、よくある質問へのアクセス、Verbatim サポートチームへのお問い合わせは、- www.verbatim.com/support をご覧ください。

www.verbatim.com

- EUROPE/MIDDLE EAST/AFRICA: Verbatim GmbH, Düsseldorfer Straße 13, 65760 Eschborn, Germany
- AMERICAS: USA Verbatim Americas LLC, Charlotte, NC 28262
- AUSTRALIA/ NEW ZEALAND: Verbatim Australia Pty Ltd, Unit 6, 450 Princes Highway, Noble Park, Victoria, 3174 Australia
- ASIA: Verbatim Hong Kong Ltd, Unit 1101-02, 11/F, Energy Plaza, No. 92 Granville Road, Tsimshatsui East, Kowloon, Hong Kong
Japan: Verbatim Japan LTD., 2-15-4 Kandatsukasamachi, Chiyoda-ku, Tokyo 101-0048, Japan



Verbatim QSG 32120 Universal Travel Adapter UTA-05 EN Rev. 23-09

