


HERO Series - Assembly Instructions




Read over the manual before you begin.
Two people are suggested for assembly.

CONTENT CHECKLIST

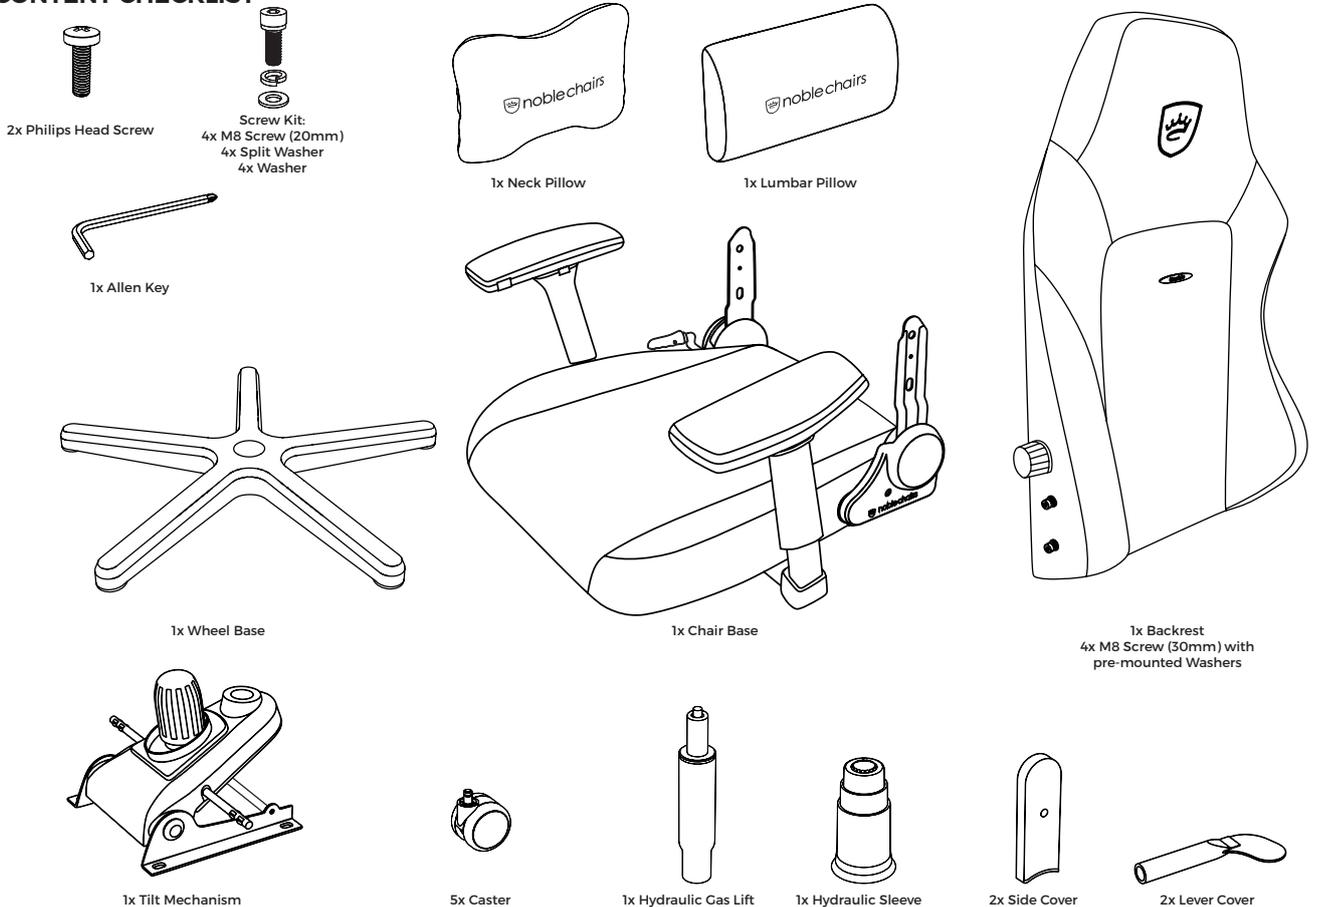


TILT MECHANISM INSTALLATION

- 1 Place the CHAIR BASE upside-down on a soft surface and position the TILT MECHANISM in the correct direction.
- 2 Place a SPLIT WASHER and then a WASHER onto each of the 4 M8 SCREWS.

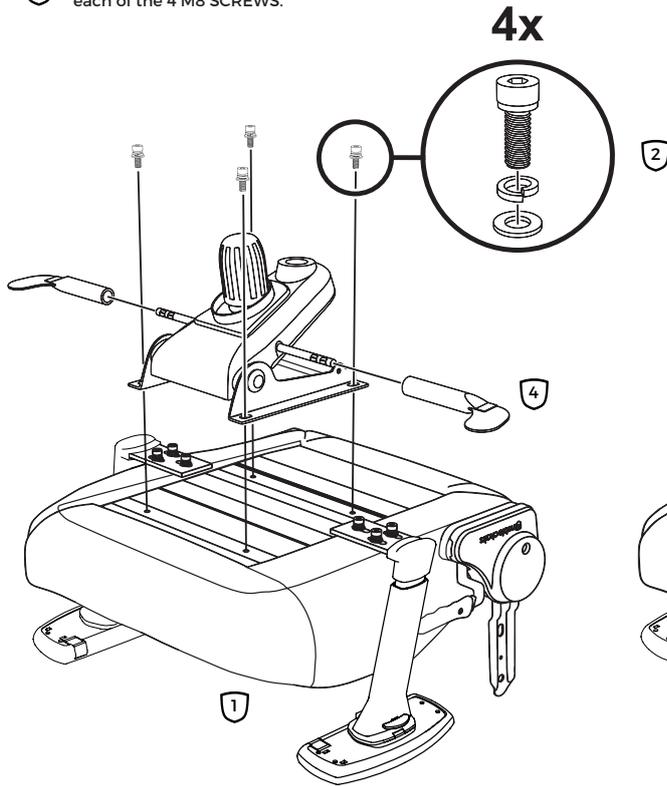


- 3 Install the TILT MECHANISM by diagonally tightening the screws into the CHAIR BASE with the ALLEN KEY.
- 4 Place plastic LEVER COVERS onto metal handles, align and push evenly into place.


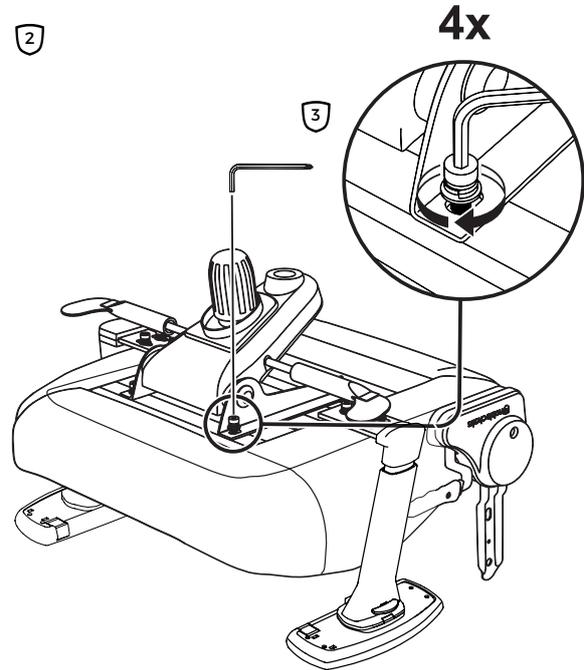


WHEELBASE INSTALLATION

- 5 Insert the 5 CASTERS into the WHEEL BASE. Push firmly to lock them into place.

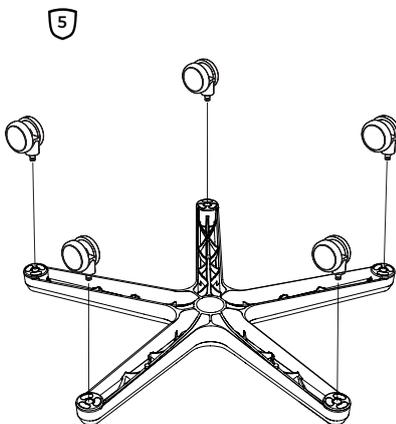


- 6 Position the HYDRAULICS into the WHEEL BASE and place the HYDRAULIC SLEEVE over it.

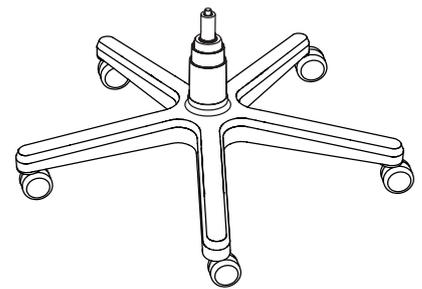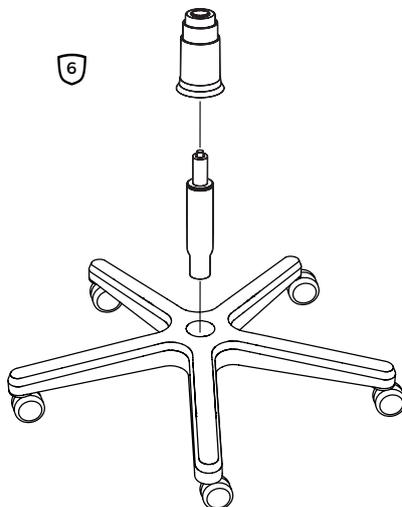


CHAIRBASE INSTALLATION

7 Align the top of the HYDRAULICS into the bottom of the TILT MECHANISM.

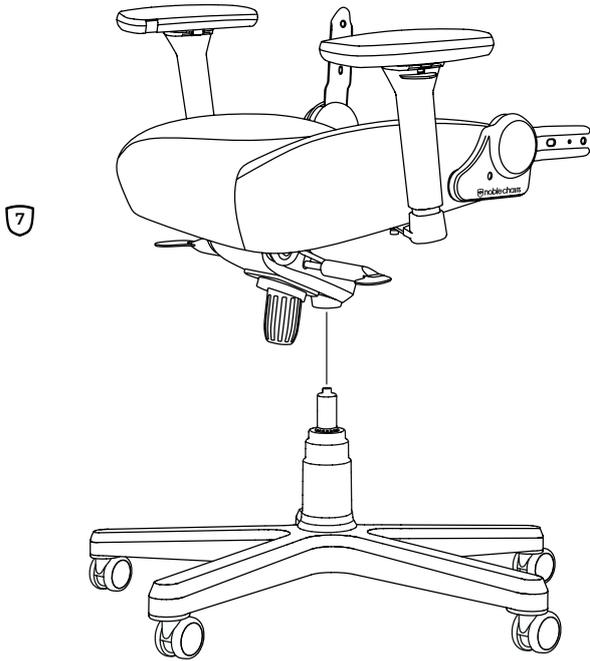



8 Push and sit down on the seat to lock it into place.

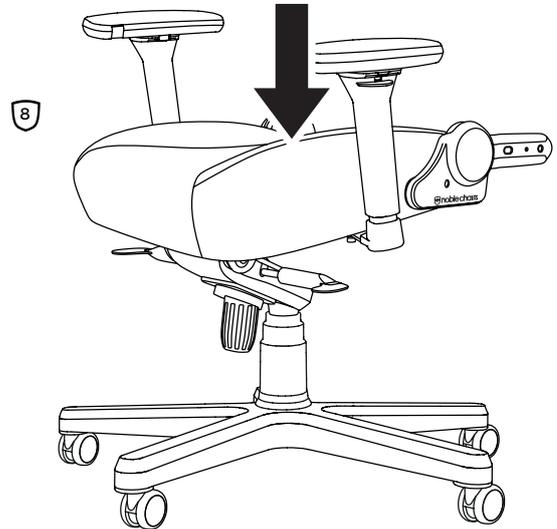

BACKREST INSTALLATION


9 Using the ALLEN KEY, unscrew the 4 M8 (30mm) pre-mounted screws and washers on the side of the backrest.

10 Push the lever from below, with enough force to ensure that the mounting bracket snaps forward. Keep your hands clear of the bracket during this process to avoid injury. Push back the mounting bracket to roughly a 90° for easier backrest mounting.

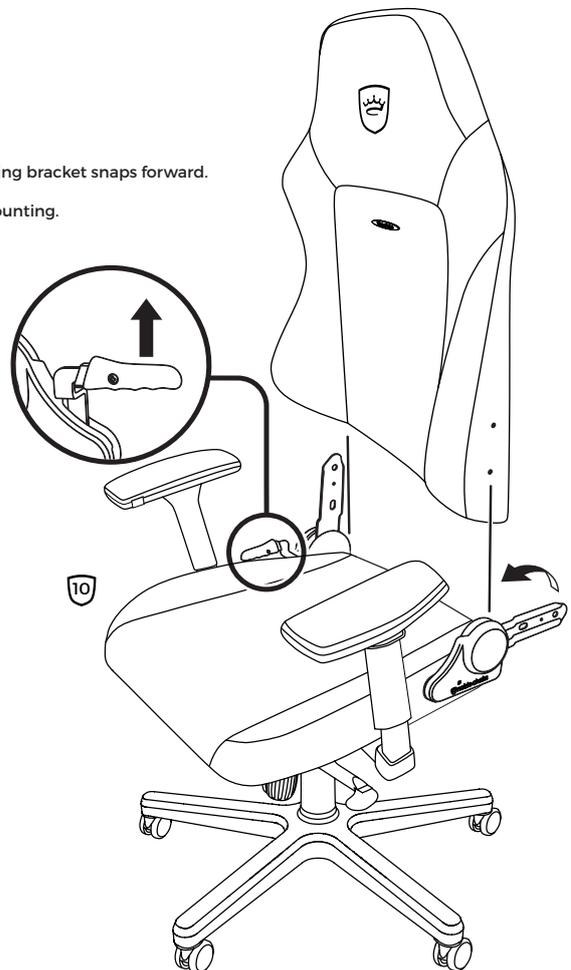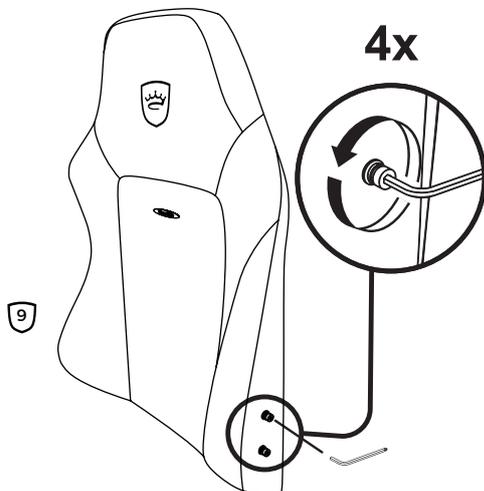


BACKREST INSTALLATION

- 11 Starting with the right side, attach the backrest to the metal brackets with the 4 M8 (30mm) screws using the ALLEN KEY.

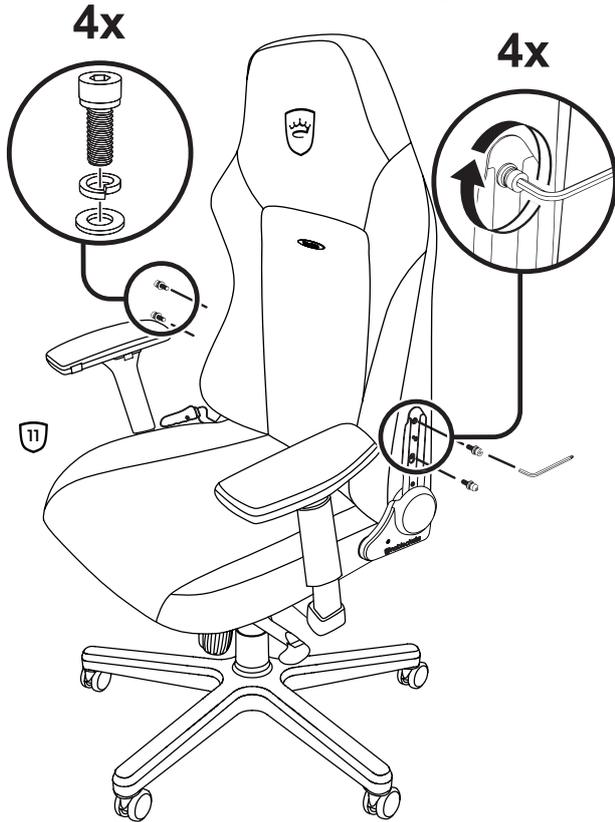

- 12 While firmly pushing SIDE COVERS into place, use the ALLEN KEY to secure the SIDE COVERS with the 2 PHIL-IPS HEAD SCREWS.

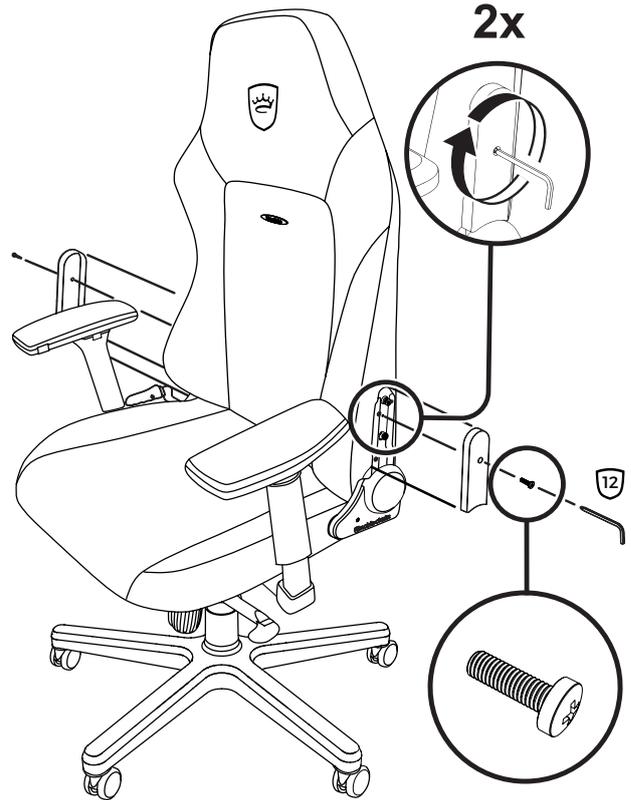

BACKREST INSTALLATION

- 13 Attach the NECK PILLOW by sliding its elastic band around the headrest of the chair.




4D ARMREST ADJUSTMENTS

14 Starting with the right side, attach the backrest to the metal brackets with the 4 M8 (30mm) screws using the ALLEN KEY.

15 Use the appropriate function to adjust the armrests.


16 Use the right lever to adjust the chair's height.

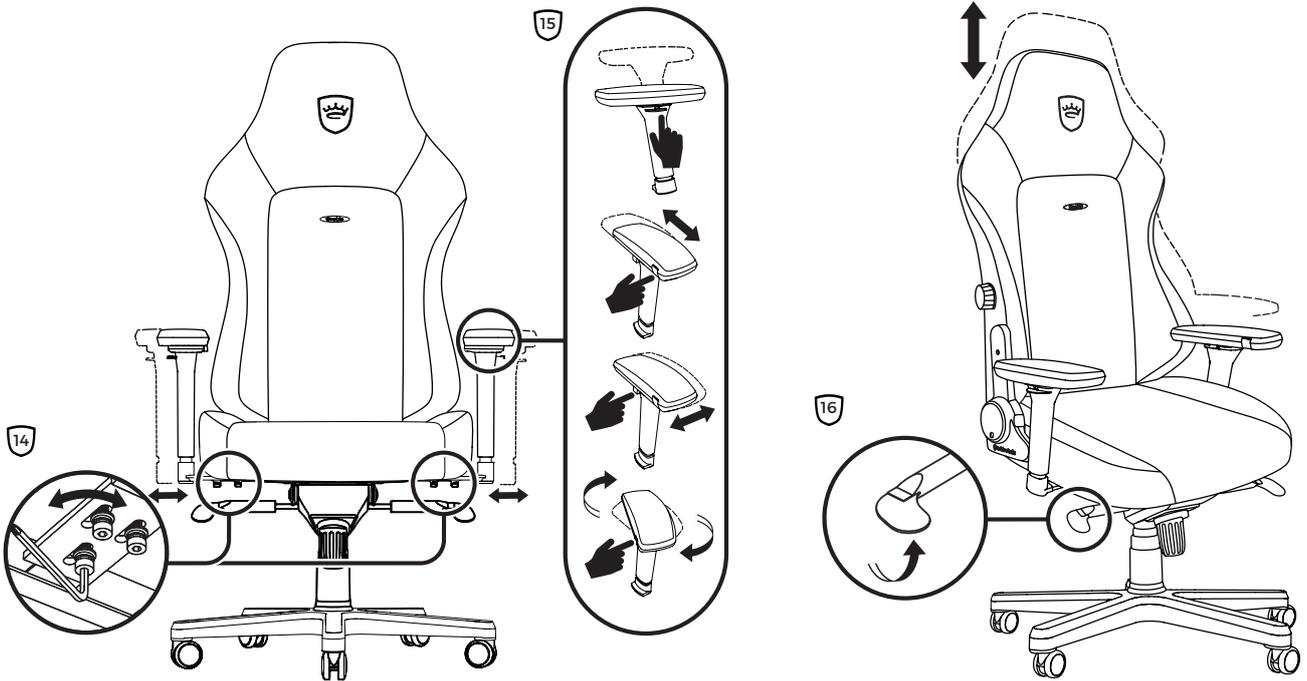

TILT ADJUSTMENT


17 Turn the cylinder knob under the chair clockwise to tighten the seat's rockability and counterclockwise to loosen it. Adjust according to your own weight.

18 Use the left lever to lock/unlock the tilt mechanism.

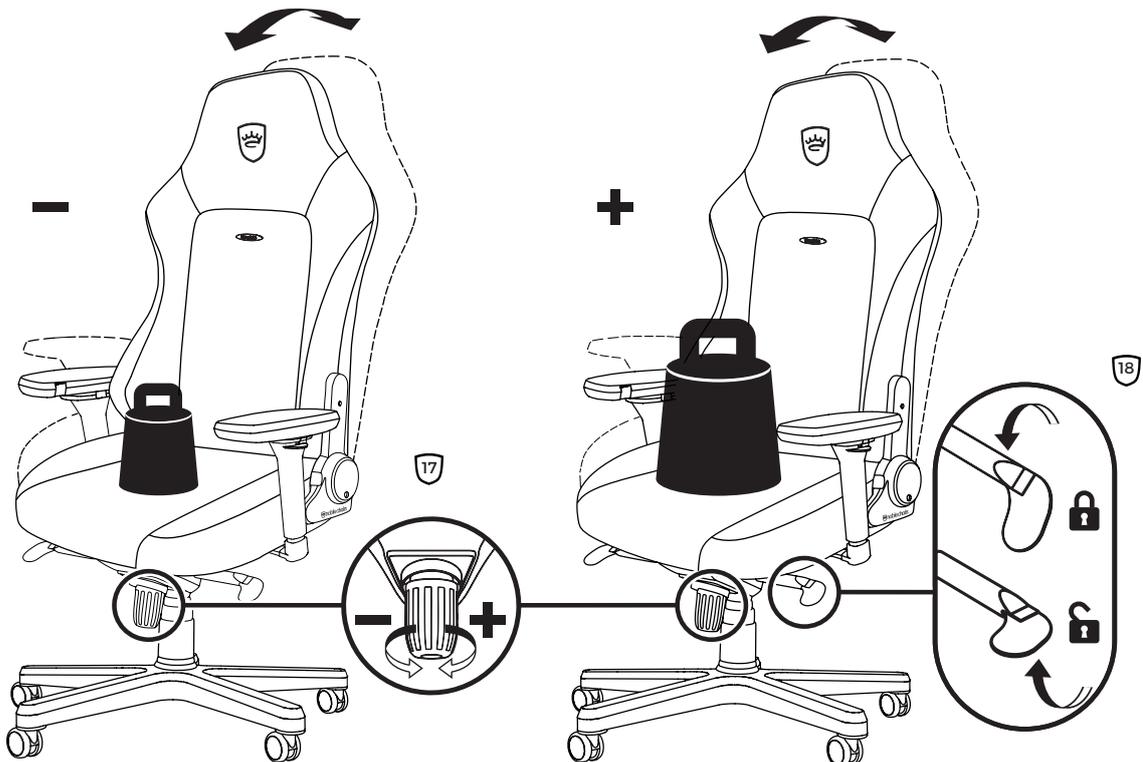


SEATING ADJUSTMENT

- 19 Pull up on the lever and slowly lean back until the preferred position is achieved.

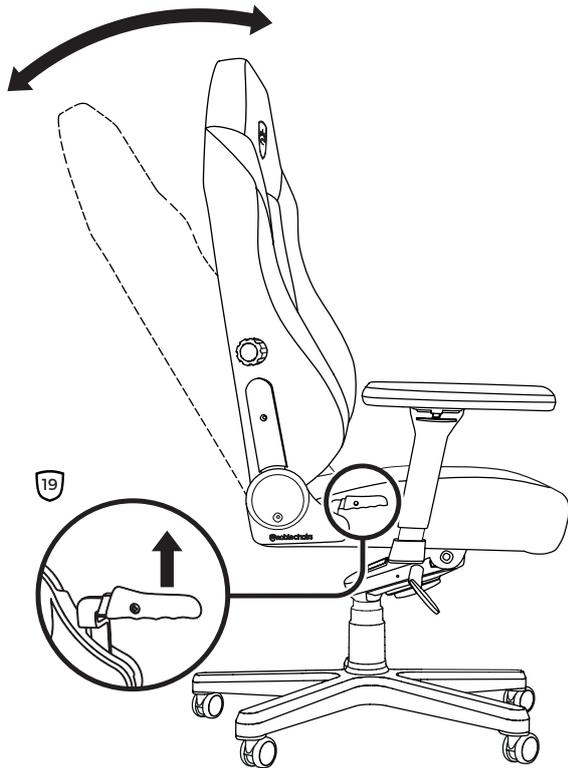

- 20 Adjust the chair's lumbar support by using the knob on the right side of the backrest.

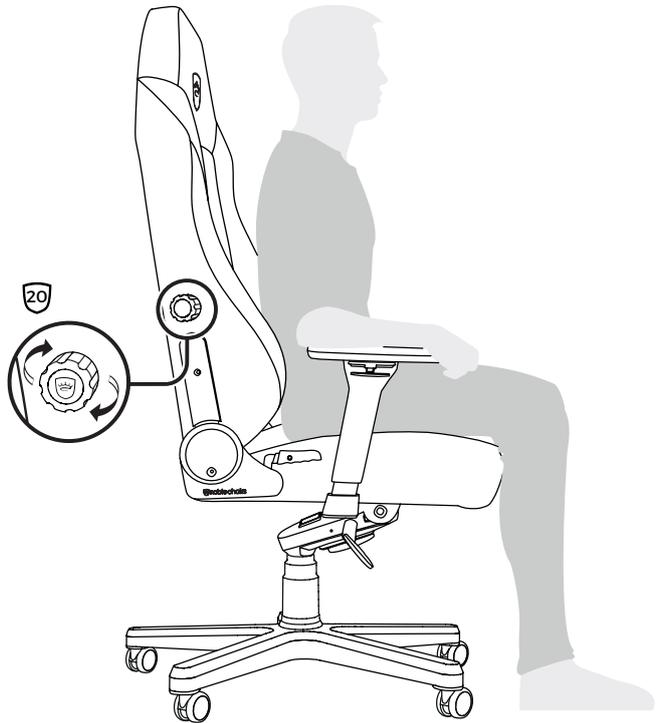

Care Instructions

Keep noblechairs tidy by vacuuming its seams with a crevice tool.
Dust regularly using a clean, lint-free, slightly damp soft cloth and wipe the area clean.
Avoid direct sunlight and keep away from heat sources to protect its leather.
Clean spills quickly. Blot away with a clean cloth, but do not rub.
Clean the casters by wiping off dirt with a scrub brush. Vacuum out dust caught inside of the wheels.
For further cleaning, pull off the wheels and wipe them down with a surface cleaner and a clean rag.
Push firmly to lock them back into place.

Safety Information

The maximum recommended user weight of the HERO Series is up to 150kg or 330.7 pounds.
Don't use noblechairs in an abusive manner. noblechairs is not liable for any damages resulting from improper assembly and usage.



Return/Exchange Policy

The original packaging can be conveniently reused for a noblechairs return or exchange.
noblechairs accepts returns that are properly packaged.

