




Delock PCI Express Card > 2 x Gigabit LAN

Description

The PCI Express card by Delock offers two network ports with a data transfer rate up to 1000 Mbps.

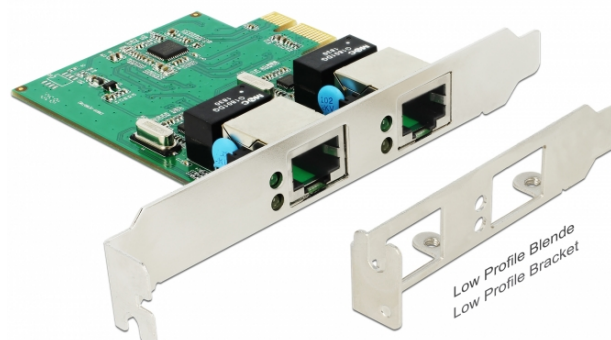

Specification

- Connectors:
 - external: 2 x Gigabit LAN RJ45 jack
 - internal: 1 x PCI Express x1, V1.1
- Chipset: Realtek RTL8111H, ASMedia ASM1182e
- Data transfer rate:
 - Ethernet up to 10 Mbps (Half/Full Duplex)
 - Fast Ethernet up to 100 Mbps (Half/Full Duplex)
 - Gigabit Ethernet up to 1000 Mbps (Half/Full Duplex)
 - PCI Express x1 up to 2.5 Gbps
- Compatible with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- Supports Wake On LAN (WOL)
- Supports IEEE 802.1P layer 2 priority encoding
- Supports IEEE 802.3x full duplex flow control
- Supports IEEE 802.1Q Virtual LAN (VLAN)

System requirements

- Linux Kernel 3.10 or above
- Mac OS 10.5 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express slot

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Item no. 89999

EAN: 4043619899999

Country of origin: China

Package: • Retail Box



Images





General

Supported operating system:	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
	Linux Kernel 3.10 or above

Interface

External:	2 x Gigabit LAN RJ45 jack
Internal:	1 x PCI Express x1, V1.1

Technical characteristics

Chipset:	Realtek RTL8111H
Data transfer rate:	Ethernet up to 10 Mbps
	Fast Ethernet up to 100 Mbps
	Gigabit Ethernet up to 1 Gbps

Physical characteristics

Slot bracket:	low profile
	standard