

NUX

MIGHTY8BT
PORTABLE AMPLIFIER

Owner's Manual



SPEAKER
6.5"

EFFECTS
3

UPDATE
USB

WARNING

To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture.

CAUTION

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.



The lightning symbol within a triangle means, "Electrical caution!" It indicates the presence of information about operating voltage and potential risks of electrical shock.



The exclamation point within a triangle means, "Caution!" Please read the information next to all caution signs.

Contents

Introduction	01
Features	01
Control Panel	02
Functional Operation	04
Battery Operation	07
Specification	08

Introduction


Portable and powerful – Mighty8BT is portable 8-watt amplifier with guitar and microphone channels and Bluetooth connection. There are primary settings on the amplifier's top panel and you can easily dial-up the sound you like. Choose a drive or clean tone and activate the effects with the LED colored buttons, adjust the gain, output level and EQ, and engage 3 effects simultaneously (MOD/DELAY/REVERB). You can connect your mobile device to play your favorite music or your backingtracks, plug your guitar and microphone to play along and sing. Carry your creativity everywhere!

* There are more effects and functions comes up with Mighty APP, free to download on Google Play and Apple Store.


Features

- 8 Watt, 6.5" speaker
- Bluetooth connection
- 2 Inputs for Instrument and Microphone
 - Clean, Overdrive and Distortion sounds
 - Tone, Level and Modulation / Delay level controls
- Microphone Channel
 - Level and Reverb effect send controls
- Drum rhythms and drum level controls
- TAP TEMPO to adjust the drum speed
- Master Reverb control
- 1/8" headphone output
- 1/8" auxillary input
- Micro B USB input
- Power: DC 12V Negative Tip power adapter input or 8 AA size batteries

Control Panel

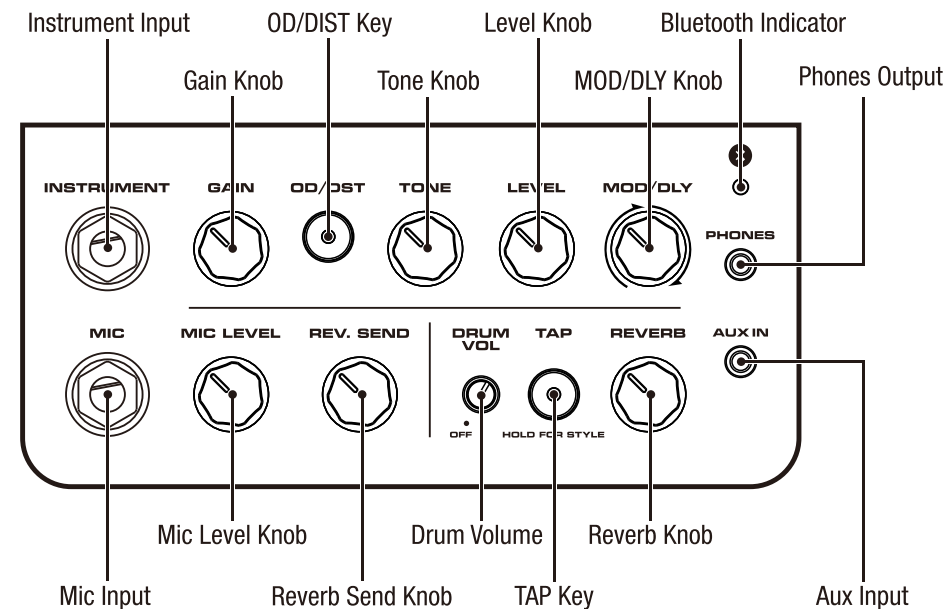

Control Panel

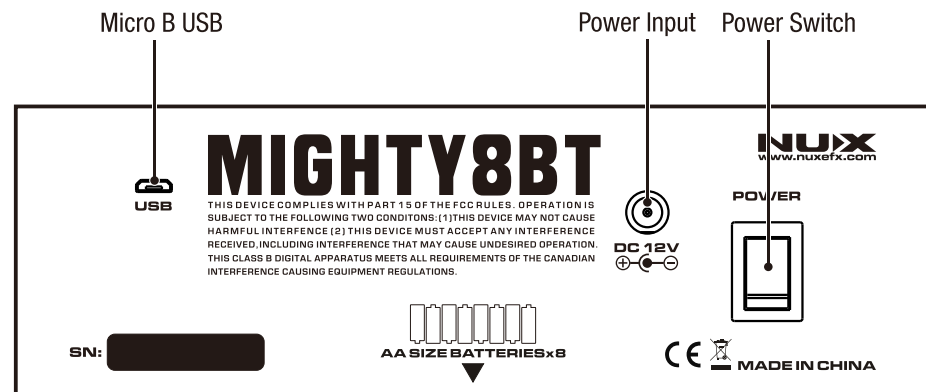

Functional Operation

INSTRUMENT



Instrument Input

1/4" Mono jack instrument channel input.

GAIN



Gain Knob

Adjusts the instrument input gain level.

OD/DST



OD/DIST Key

Instrument channel sound select button. The LED light will show the selected sound as.

Green: Clean

Yellow: Overdrive

Red: Distortion

STONE



Tone Knob

Adjusts the instrument frequency. Clockwise – Bright, Anti-clockwise – Darker sound.

LEVEL



Level Knob

Instrument channel output level.

MOD/DLY



MOD/DLY Knob

Quick control of the selected modulation and delay effect levels. Please check the Mighty APP for effects and controls.



Bluetooth Indicator

The LED blinks when it's ready for scan. And the LED flashes solid when it's connected.

Functional Operation



Phones Output

1/8" Stereo jack headphone Output.

MIC



Mic Input

1/4" Mono jack microphone channel input.

MIC LEVEL



Mic Level Knob

Adjusts the microphone input level.

REV. SEND



Reverb Send Knob

Adjusts how much of the selected reverb will be mixed to the microphone channel.

DRUM VOL



Drum Volume

It activates the drum, adjusts the drum volume. And stops the drum when it tweaked to 0.

TAP



TAP Key

TAP TEMPO button, adjusts the drum speed. Hold the TAP key and use the Drum Vol knob to change the drumming style.

HOLD FOR STYLE

REVERB



Reverb Knob

Adjusts the selected Reverb effect level. Please check the Mighty APP for effects and controls.

AUX IN



Aux Input

1/8" Stereo jack auxillary input for external music player.

Functional Operation



Micro B USB


Input for firmware update.



Power Input

DC 12V Negative Tip.

POWER



Power Switch

ON/OFF Mighty8BT.

Battery Operation

If you're on the go, you can also operate the device with 8 AA batteries. We recommend using alkaline batteries. Maximum operation time is approx.8 hours.

To insert or change batteries, please remove the battery compartment cover by pulling the ribbon gently as shown in Figure 1. Be sure to observe the correct polarity, otherwise the device will not work or could be damaged as shown in Figure 2.

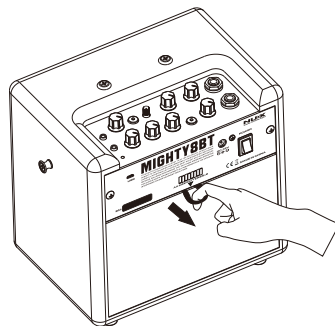


Figure 1

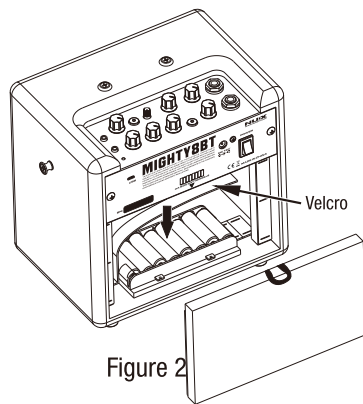


Figure 2

Specification

- Sampling Frequency: 44.1kHz
 - A/D, D/A Convert: 24.bit
 - Signal Processing: 32bit
 - Input Level:
 - Guitar Channel -10dBu
 - Mic Channel -40dBu
 - AUX In -10dBu
 - PHONES Output: 250mW + 250mW
 - Speaker: 6.5inch X 1
 - Rated Output Power: 8W
 - Power Supply: DC 12 Power adapter; 8 AA batteries (Alkaline).
 - Dimension: 240(L) x 166(W) x 220(H) mm
 - Weight: 2.6Kg
- Accessories: User manual, Adapter
*Specifications and appearance subject to change without notice.

CE mark for European Harmonized Standards

CE Mark which is attached to our company's products of Battery mains the product is in fully conformity with the harmonized standard(s) EN 61000-6-3:2007+A1:2011 & EN 61000-6-1:2007 Under the Council Directive 2004/108/EC on Electromagnetic Compatibility.

© 2019 Cherub Technology-All rights reserved. No part of this publication may be reproduced in any form without prior written permission of Cherub Technology.



www.nuxefx.com

Made in China