


# Delock PCI Express x4 Card to 2 x USB Type-C™ + 3 x USB Type-A - SuperSpeed USB 10 Gbps

## Description

This PCI Express card by Delock expands the PC by **five external USB 3.2 ports**. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

### Sufficient ports - 2 x USB Type-C™ and 3 x USB Type-A

The PCIe card offers two USB-C™ port as well as three USB Type-A ports. Thus devices can be connected with **10 Gbps** at each port.

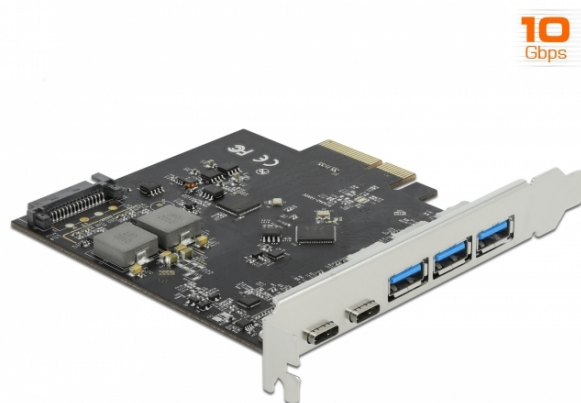

## Specification

- Connectors:  
external:  
2 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female  
3 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female  
internal:  
1 x PCI Express x4 (2-Lane), V3.0  
1 x SATA 15 pin power connector
- Chipset: Asmedia ASM3142, VIA VL822
- Data transfer rate up to:  
SuperSpeed USB 10 Gbps,  
SuperSpeed USB 5 Gbps,  
Hi-Speed 480 Mbps,  
Full-Speed 12 Mbps,  
Low-Speed 1.5 Mbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Power supply via SATA power connector
- Electrical power:  
USB Type-C™: max. 15 watt (5 V / 3 A)  
USB Type-A: max. 4.5 watt (5 V / 0.9 A)
- Bootable
- Supports UASP
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Supports Multiple INs
- Operating temperature: 5 °C ~ 50 °C
- Storage temperature: -20 °C ~ 60 °C
- Humidity: 20 ~ 80 %

## System requirements

- Linux Kernel 3.18.37 or above
- Windows 10/10-64
- Windows Server 2016
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

## Package content

- PCI Express card SuperSpeed USB 10 Gbps
- User manual

## Item no. 89064


EAN: 4043619890644

Country of origin: China

Package: • Box



Images

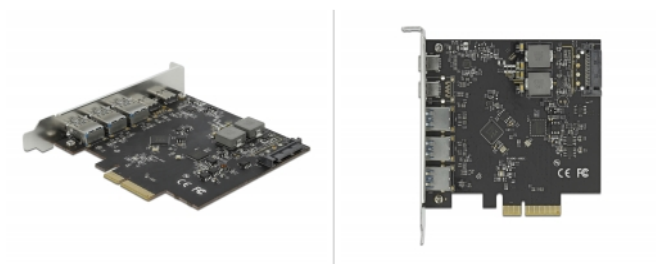



| General                     |                                                               |
|-----------------------------|---------------------------------------------------------------|
| Function:                   | bootable                                                      |
| Supported operating system: | Linux Kernel 3.18.37 or above                                 |
|                             | Windows 10 32-bit                                             |
|                             | Windows 10 64-bit                                             |
|                             | Windows 8.1 32-bit                                            |
|                             | Windows 8.1 64-bit                                            |
| Interface                   |                                                               |
| External:                   | 2 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female |
|                             | 3 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female      |
| Internal:                   | 1 x PCI Express x4, V3.0                                      |
|                             | 1 x SATA 15 pin power connector                               |
| Technical characteristics   |                                                               |
| Chipset:                    | Asmedia ASM3142                                               |
|                             | VIA VL822                                                     |
| Data transfer rate:         | 10 Gbps                                                       |