


- press **home button** to turn on the controller
- hold **home button** for 3 seconds to turn off the controller
- hold **home button** for 8 seconds to force shutdown the controller
- the controller will turn off when placed on the dock
- plug the **2.4G receiver** into the charging dock, then connect it to your Windows device via USB cable for better user experience



- \* 开机: 按下 **home 键**。
- \* 关机: 按住 **home 键** 3 秒。
- \* 强制关机: 按住 **home 键** 8 秒。
- \* 手柄置于底座时会自动关机。
- \* 可将 **2.4G 接收器** 插入底座的 USB 端口, 并通过 USB 线将底座连接到 Windows 设备使用, 以获取更佳的用户体验。

Windows[X-input]

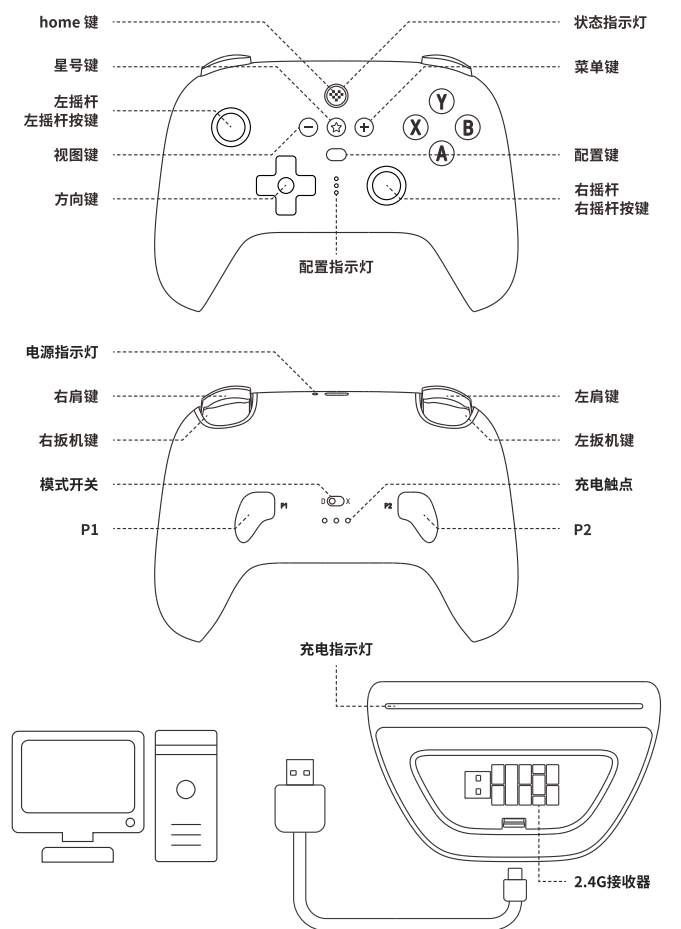

- required system: Windows 10 (1903) or above

wireless connection

- 1 - connect the **2.4G receiver** to the USB port of your Windows device
- 2 - turn the **mode switch** to **X**
- 3 - press **home button** to turn on the controller, wait till the controller is successfully recognized by the system to play, **status LED** stays solid

wired connection

- 1 - turn the **mode switch** to **X**
- 2 - connect the controller to your Windows device via USB cable, wait till the controller is successfully recognized by the system to play, **status LED** stays solid

Android[D-input]



- Android system need to be 9.0 or above
- OTG support is required on your Android device, please contact your manufacturer for more information

wireless connection

- 1 - connect the **2.4G receiver** to the USB port of your Android device
- 2 - turn the **mode switch** to **D**
- 3 - press **home button** to turn on the controller, wait till the controller is successfully recognized by the system to play, **status LED** stays solid

wired connection

- 1 - turn the **mode switch** to **D**
- 2 - connect the controller to your Android device via USB cable, wait till the controller is successfully recognized by your Android device to play, **status LED** stays solid

Turbo function



- **status LED** blinks continuously when the button with turbo functionality is pressed.
- **D-pad, joysticks** are not included
- hold the button you would like to set turbo functionality to, then press the **star** button to activate/deactivate its turbo functionality

battery



controller status - low battery	—————>	LED indicator - red LED blinks
battery charging	—————>	red LED stays solid
battery fully charged	—————>	red LED turns off
charging dock status - battery charging	—————>	LED indicator - white LED stays solid
battery fully charged	—————>	white LED turns off

- 15 hours of play time with a 480mAh built-in battery pack, rechargeable with 2 hours charging time
- charging time with the controller on the dock is the same as charging via USB cable

Ultimate Software

- press **profile switch button** to switch between 3 custom profiles. The profile indicator will not light up when using the default setting
- it gives you elite control over every piece of your controller: customize button mapping, adjust stick & trigger sensitivity, vibration control and create macros with any button combination. Please visit [support.8bitdo.com](http://support.8bitdo.com) for the application

Support



- please visit [support.8bitdo.com](http://support.8bitdo.com) for further information & additional support



连接 Windows 设备



- \* 要求 Windows 设备系统版本为 Windows 10 (1903) 或更高版本。

无线连接

1. 将配备的 **2.4G 接收器** 连接到 Windows 设备的 USB 端口。
2. 将手柄背后的 **模式开关** 移动到 **X** 位置。
3. 按下 **home 键** 开启手柄, 等待系统识别完成后, **状态指示灯** 常亮。

有线连接

1. 将手柄背后的 **模式开关** 移动到 **X** 位置。
2. 使用 USB 线将手柄连接到 Windows 设备的 USB 端口, 等待系统识别完成后, **状态指示灯** 常亮。

连接 Android 设备



- \* 要求 Android 设备系统版本为 9.0 或更高版本。
- \* 需要 Android 设备配备 USB 端口且支持 OTG 功能, 详情请咨询设备制造商。

无线连接

1. 将配备的 **2.4G 接收器** 连接到 Android 设备的 USB 端口。
2. 将手柄背后的 **模式开关** 移动到 **D** 位置。
3. 按下 **home 键** 开启手柄, 等待系统识别完成后, **状态指示灯** 常亮。

有线连接

1. 将手柄背后的 **模式开关** 移动到 **D** 位置。
2. 使用 USB 线将手柄连接到 Android 设备的 USB 端口, 等待系统识别完成后, **状态指示灯** 常亮。

连发功能



- \* 已开启连发功能的按键, 按下时 **状态指示灯** 会持续闪烁。
- \* **方向键、左摇杆、右摇杆** 不支持连发。
- \* 按住需要设置连发的功能键, 再按下 **星号键** 可开启 / 关闭连发。

电源



手柄电源状态 - 电量不足	—————>	电源指示灯状态 - 红灯闪烁
正在充电	—————>	红灯常亮
充电完成	—————>	红灯熄灭
底座电源状态 - 正在充电	—————>	充电指示灯状态 - 白灯常亮
充电完成	—————>	白灯熄灭

- \* 配备 480mAh 可充电式锂电池, 可持续使用约 15 小时, 充电时间约 2 小时。
- \* 手柄置于底座的充电时长与 USB 充电一致。

自定义配置

- \* 配置后可按下 **配置键** 切换不同的配置, 默认无配置。
- \* 请访问 [app.8bitdo.cn](http://app.8bitdo.cn) 获取精英软件, 可对手柄按键映射、摇杆灵敏度、扳机键灵敏度、振动强度以及宏等功能进行自定义配置。

技术支持



- \* 请访问 [support.8bitdo.cn](http://support.8bitdo.cn) 了解详细信息。

