




VIKING ARM

- EN Manual**
- DE Gebrauchsanleitung**
- NO Bruksanvisning**

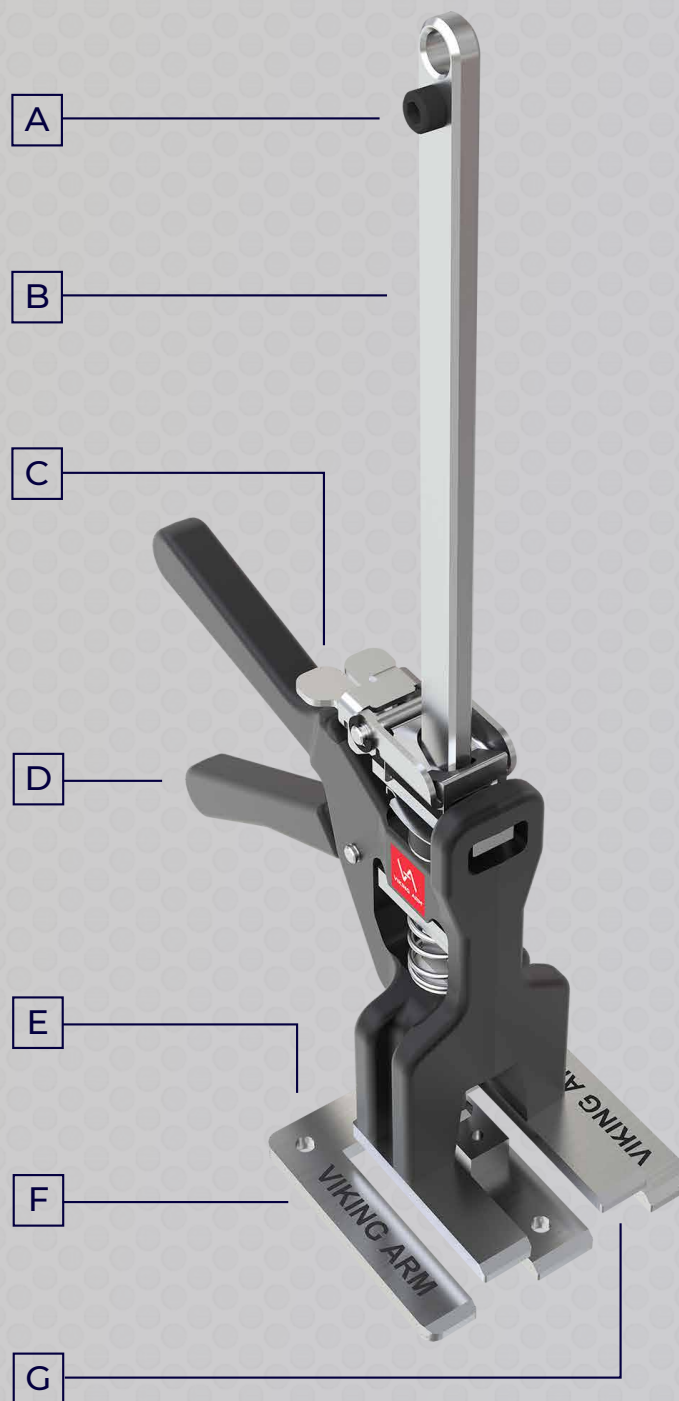

EN

- [A] Lock Screw
- [B] Shaft
- [C] Lock & Release Mechanism
- [D] Lever
- [E] Mounting Holes
- [F] Base Plate
- [G] Bars

DE

- [A] Sicherungsschraube
- [B] Schaft
- [C] Verriegelungs- und Freigabemechanismus *
- [D] Hebel
- [E] Befestigungsloch
- [F] Grundplatte
- [G] Fuß

NO

- [A] Sikkerhetsskruen
- [B] Stang
- [C] Lås-/utløsermekanisme
- [D] Spak
- [E] Festehull
- [F] Grunnplate
- [G] "Føtter"

Mounting Montage Montering




6 Nm /
4.4 ft lb



Lift Mode

Hebemodus


Løft

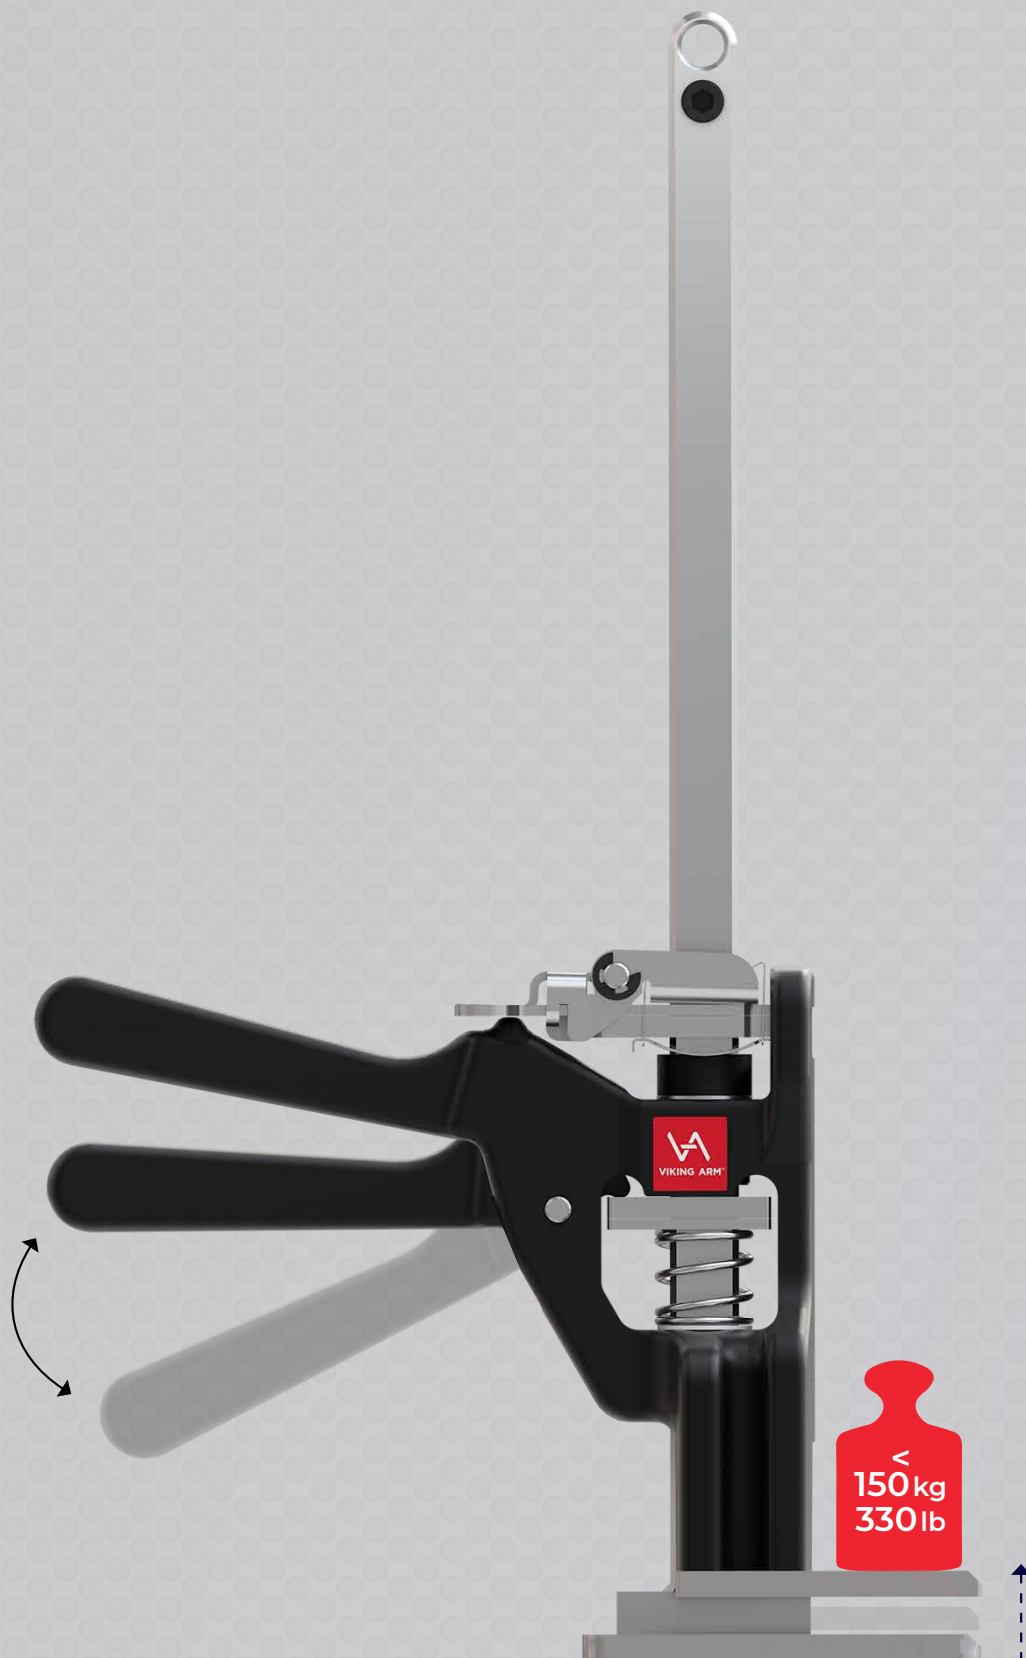

Controlled lowering

Kontrolliertes Absenken

Kontrollert senking

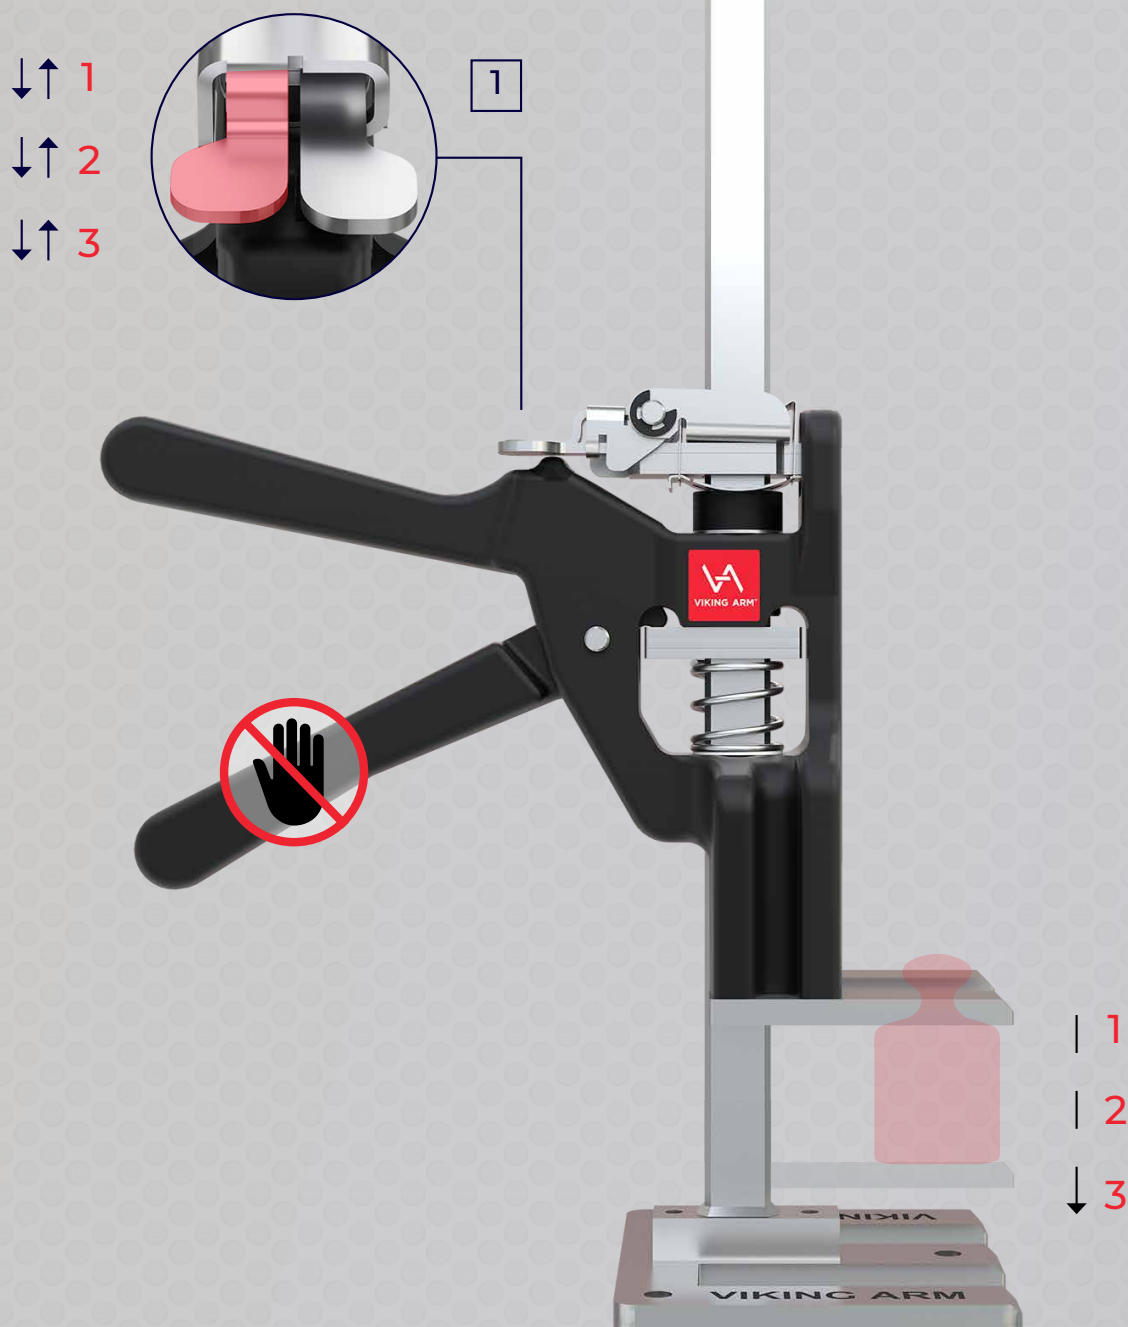

EN

1 Pump left
'Quick release trigger'
for controlled lowering

DE

1 Zum kontrollierten
Absenken den linken
Auslöser pumpen


NO

1 Pump venstre utløser
for kontrollert senking

Full Release

Schnelles Absenken

Rask senking

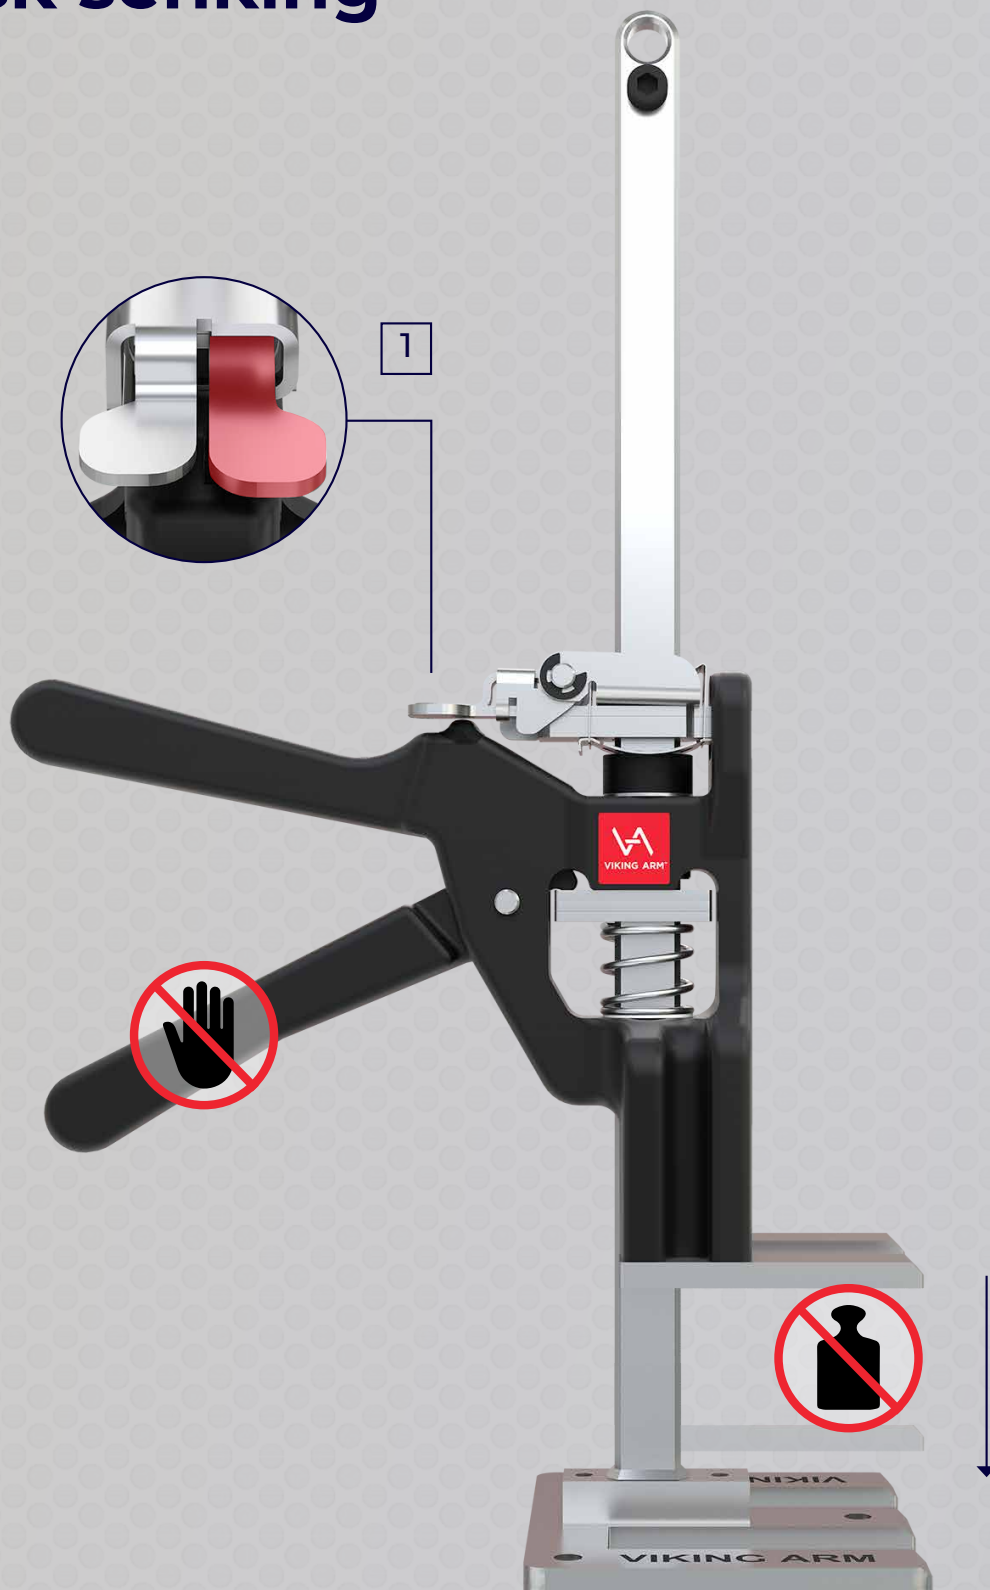

EN

- 1 Press down
and hold right
'Full release trigger'

DE

- 1 Zum schnellen
Absenken den rechten
Auslöser gedrückt halten


NO

- 1 Trykk høyre utløser
for å slippe ned

Use as a clamping tool

Als Spannwerkzeug verwenden

Bruk som tvinge

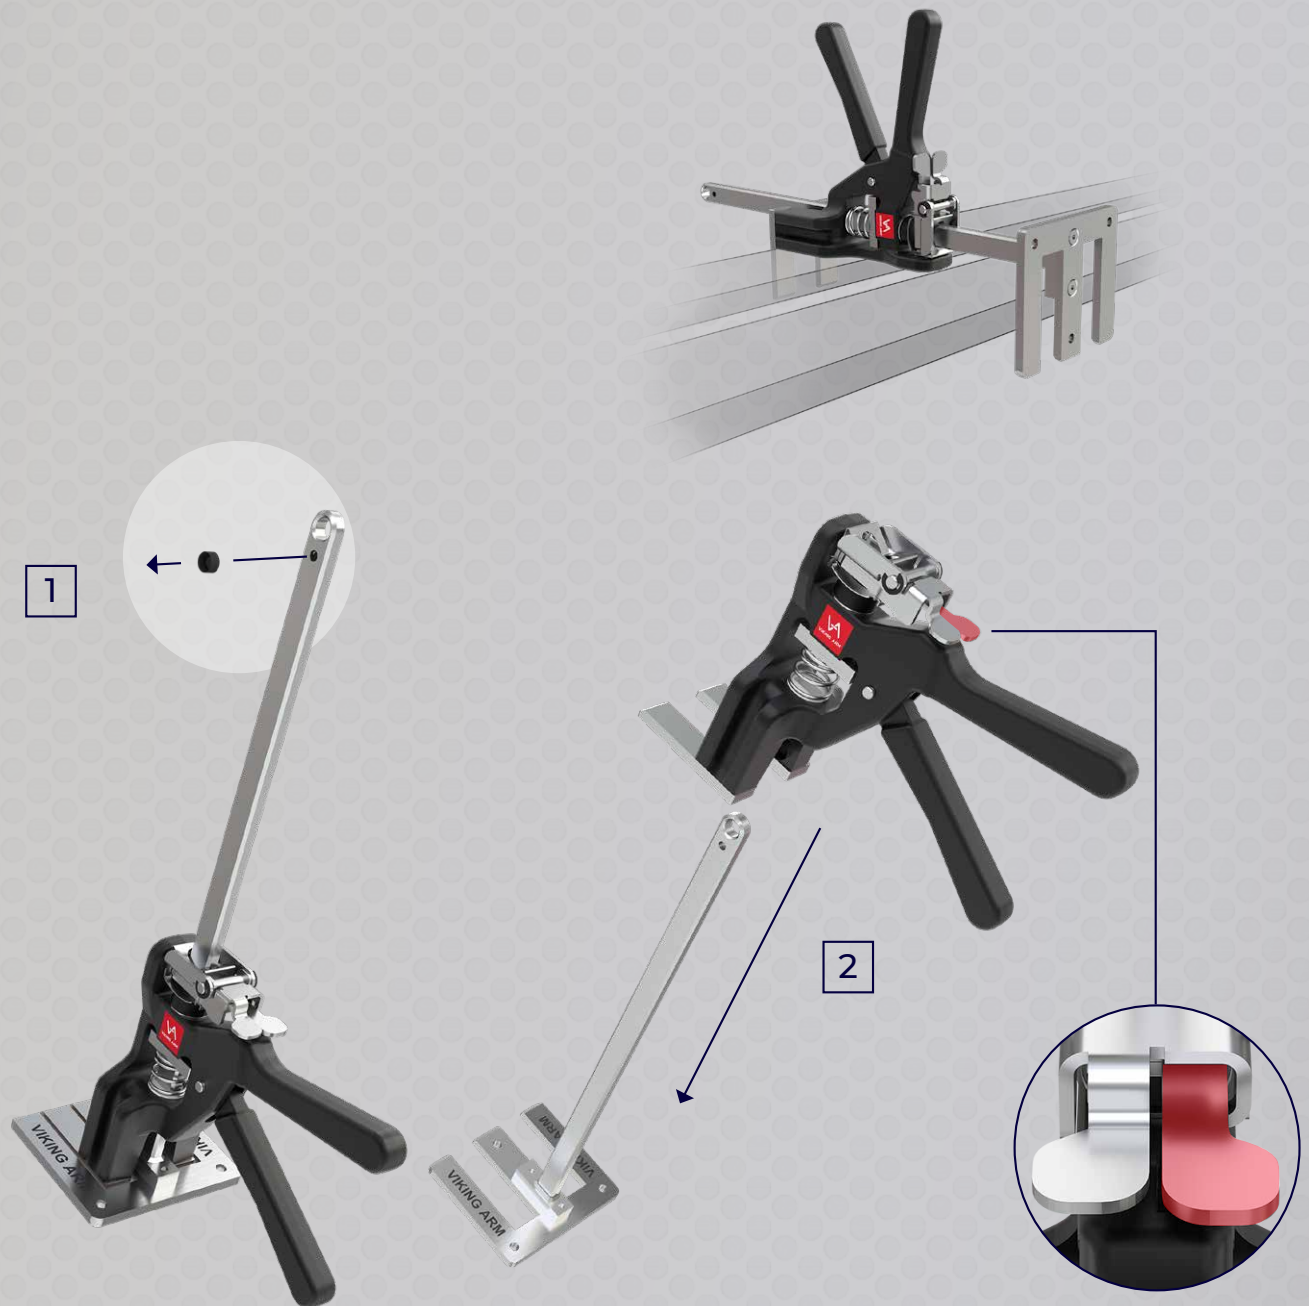

EN


- 1 Remove Lock Screw
- 2 Press and hold the right trigger. Pull out the shaft

DE

- 1 Sicherheitsschraube entfernen
- 2 Rechten Auslöser gedrückt halten und den Schaft herausziehen

NO

- 1 Skru ut sikkerhetsskruen
- 2 Hold nede høyre utløser hele tiden. Dra ut stangen

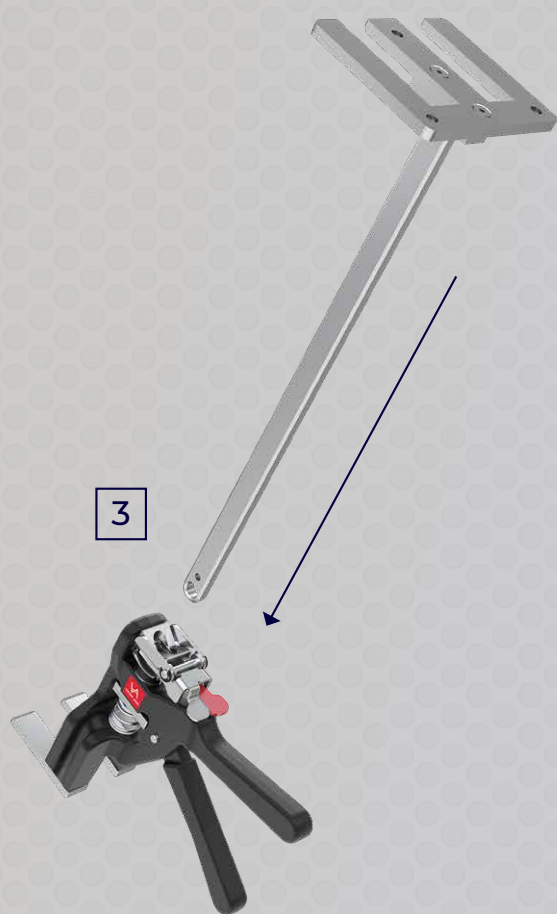

EN

- 3 Fully insert the shaft from the other side while holding down the right trigger
- 4 Release the trigger and attach the Lock Screw

DE

- 3 Rechten Auslöser gedrückt halten und den Schaft von der anderen Seite einschieben
- 4 Auslöser loslassen und Sicherheitsschraube einschrauben

NO

- 3 Mens du holder utløseren nede, tre stangen helt inn på motsatt side
- 4 Slipp utløseren og skru på sikkerhetsskruen



VIKING ARM