




SILVERSTONE[®]
Designing Inspiration

M.2 SSD cooling kit TP02-M2

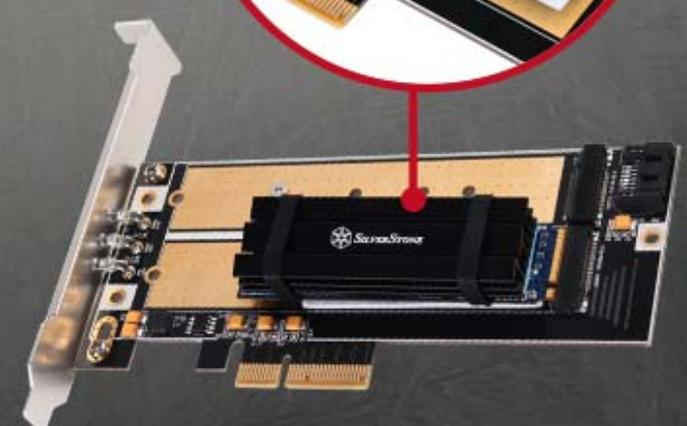

Supports 2280 length M.2 SSD

- Aluminum alloy heatsink increases M.2 SSD cooling area
- Efficient heat conduction pad for reducing temperature
- Double layer design enhances SSD cooling for stability and efficiency
- Easy to apply and affix with silicone bands without damaging M.2 SSD

Specifications

Model No	SST-TP02-M2
Material	Aluminum, silicone
Color	Black
Thermal pad conductivity	1.5W/m.k
Thermal pad thickness	1.0mm 1.5mm
Operating temperature	-20°C ~ 180°C
M.2 size support	2280 (22mm x 80mm)
Net Weight and dimension	Heatsink : 70mm (W) x 10mm (H) x 20mm (D), 16.1g Blue Pad : 70mm (W) x 1mm (H) x 20mm (D), 3.25g Gray Pad 1 : 60mm(W) X 1mm(H) X 20mm(D), 2.8g Gray Pad 2 : 60mm(W) X 1.5mm(H) X 20mm(D), 3.7g

* Includes two gray colored thermal pads with different thickness. For single sided M.2 SSD (flat back without component), please use 1.5mm thick pad; for double sided M.2 SSD (both sides with components), please use 1mm thick pad

** If one gray pad is not thick enough to make contact with both M.2 SSD and your motherboard or adapter card, then you should carefully attach both included pads in your TP02-M2 kit together (make sure to avoid trapping air bubbles between them). Your goal is to create enough thickness to enable solid contacts so the heat from M.2 SSD can be transferred through to the motherboard or adapter card

*** If the M.2 slot on the motherboard is situated next to a PCIe slot, the height of the TP02-M2 's heat sink may interfere with graphic card or expansion card installation, we recommended installing TP02-M2 onto other available M.2 slots on the motherboard to avoid interference issue

Taiwan Headquarters

12F., No.168, Jiansong Rd.,
Zhonghe Dist., New Taipei City 235,
Taiwan R.O.C.
Tel: + 886-2-8228-1238 / Fax: + 886-2-8228-7123
For sales and purchasing: sales@silverstonetek.com

USA

13626 Monte Vista Ave. Unit #A,
Chino, CA 91710,
USA
Tel: + 1-909-465-9596 / Fax: + 1-909-465-9569
For General Questions/Sales: usasales@silverstonetek.com

Europe

Brandstücken 27,
D-22549 Hamburg,
Germany
Tel: + 49-40-675931-0 / Fax: + 49-40-675931-66
For sales and purchasing: sales.eu@silverstonetek.de