

Anex

Phanteks AMP 750W (#2)

Lab ID#: PH19750145
Receipt Date: Aug 26, 2019
Test Date: Feb 11, 2020

Report: 20PS1596A

Report Date: Feb 14, 2020

DUT INFORMATION

Brand	Phanteks
Manufacturer (OEM)	Seasonic
Series	AMP
Model Number	PH-P750G
Serial Number	R1906AA252140121
DUT Notes	

DUT SPECIFICATIONS

Rated Voltage (Vrms)	100-240
Rated Current (Arms)	10-5
Rated Frequency (Hz)	50-60
Rated Power (W)	750
Type	ATX12V
Cooling	120mm Fluid Dynamic Bearing Fan (HA1225H12F-Z)
Semi-Passive Operation	✓ (selectable)
Cable Design	Fully Modular

POWER SPECIFICATIONS

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	20	20	62	3	0.3
	Watts	100		744	15	3.6
Total Max. Power (W)		750				

CABLES AND CONNECTORS

Modular Cables

Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors
ATX connector 20+4 pin (610mm)	1	1	18-22AWG	Yes
4+4 pin EPS12V (650mm)	2	2	18AWG	No
6+2 pin PCIe (680mm+80mm)	2	4	18AWG	No
SATA (420mm+150mm+150mm+150mm)	2	8	18AWG	No
SATA (300mm+150mm)	1	2	18AWG	No
4 pin Molex (450mm+120mm+120mm)	1	3	18AWG	No
4 pin Molex to SATA 3.3V Adapter (150mm+150mm)	1	2	18AWG	No
AC Power Cord (1370mm) - C13 coupler	1	1	18AWG	-

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 1/16

Anex

Phanteks AMP 750W (#2)

General Data	
Manufacturer (OEM)	Seasonic
PCB Type	Double Sided
Primary Side	
Transient Filter	4x Y caps, 2x X caps, 2x CM chokes, 1x MOV, 1x Discharge IC
Inrush Protection	NTC Thermistor & Relay
Bridge Rectifier(s)	2x GBU1508 (800V, 15A @ 100°C)
APFC MOSFETS	2x Infineon IPA50R190CE (550V, 15.7A @ 100°C, 0.19Ohm)
APFC Boost Diode	1x STMicroelectronics STTH8S06 (600V, 8A)
Hold-up Cap(s)	1x Rubycon (400V, 560uF, 2,000h @ 105°C, MXH)
Main Switchers	4x Champion GPT10N50AD (500V, 9.7A, 0.7Ohm)
APFC Controller	Champion CM6500UNX
Resonant Controllers	Champion CM6901T6
Topology	Primary side: Full-Bridge & LLC converter Secondary side: Synchronous Rectification & DC-DC converters
Secondary Side	
+12V MOSFETS	4x Nexperia PSMN2R6-40YS (40V, 100A @ 100°C, 5.3mOhm @ 175°C)
5V & 3.3V	DC-DC Converters
Filtering Capacitors	Electrolytics: 6x Nippon Chemi-Con (4-10,000h @ 105°C, KY), 3x Nippon Chemi-Con (1-5,000h @ 105°C, KZE), 2x Nichicon (2-5,000h @ 105°C, HD), 3x Nichicon (4-10,000h @ 105°C, HE) Polymers: 9x FPCAP, 2x NIC, 6x United Chemi-Con
Supervisor IC	Weltrend WT7527V (OCP, OVP, UVP, SCP, PG)
Fan Model	Hong Hua HA1225H12F-Z (120mm, 12V, 0.58A, Fluid Dynamic Bearing Fan)
5VSB Circuit	
Rectifier	1xPFC P10V45SP SBR (45V, 10A)
Standby PWM Controller	Excelliance MOS EM8569

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 2/16

Anex

Phanteks AMP 750W (#2)

RESULTS

Temperature Range (°C /°F)	30-32 / 86-89.6
ErP Lot 3/6 Ready	ErP Lot 6 2010: ✓ ErP Lot 6 2013: ✓ ErP Lot 3 2014 & CEC: Partially
(EU) No 617/2013 Compliance	✓

115V

Average Efficiency	88.622%
Efficiency With 10W (≤500W) or 2% (>500W)	59.918
Average Efficiency 5VSB	76.001%
Standby Power Consumption (W)	0.0450366
Average PF	0.976
Avg Noise Output	33.13 dB(A)
Efficiency Rating (ETA)	GOLD
Noise Rating (LAMBDA)	S++

230V

Average Efficiency	90.413%
Average Efficiency 5VSB	75.535%
Standby Power Consumption (W)	0.0740516
Average PF	0.935
Avg Noise Output	33.10 dB(A)
Efficiency Rating (ETA)	GOLD
Noise Rating (LAMBDA)	S++

TEST EQUIPMENT

Electronic Loads	Chroma 63601-5 x4 Chroma 63600-2 x2 63640-80-80 x20 63610-80-20 x2
AC Sources	Chroma 6530, Keysight AC6804B
Power Analyzers	N4L PPA1530 x2
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Data Loggers	Picoscope TC-08 x2, Labjack U3-HV x2
Tachometer	UNI-T UT372 x2
Digital Multimeter	Keysight U1273AX, Fluke 289, Keithley 2015 - THD
UPS	CyberPower OLS3000E 3kVA x2

HOLD-UP TIME & POWER OK SIGNAL (230V)

Hold-Up Time (ms)	21
AC Loss to PWR_OK Hold Up Time (ms)	17.5
PWR_OK Inactive to DC Loss Delay (ms)	3.5

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 3/16

EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

Efficiency: Phanteks PH-P750G

Ambient: 37°C - 47°C (98.6°F - 116.6°F)

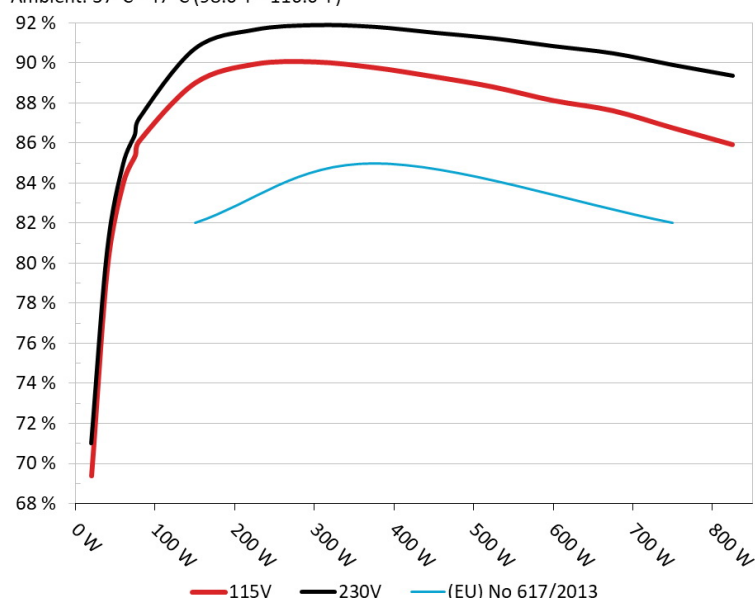


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB EFFICIENCY

5VSB Efficiency: Phanteks PH-P750G

Ambient: 34°C - 36°C (93.2°F - 96.8°F)

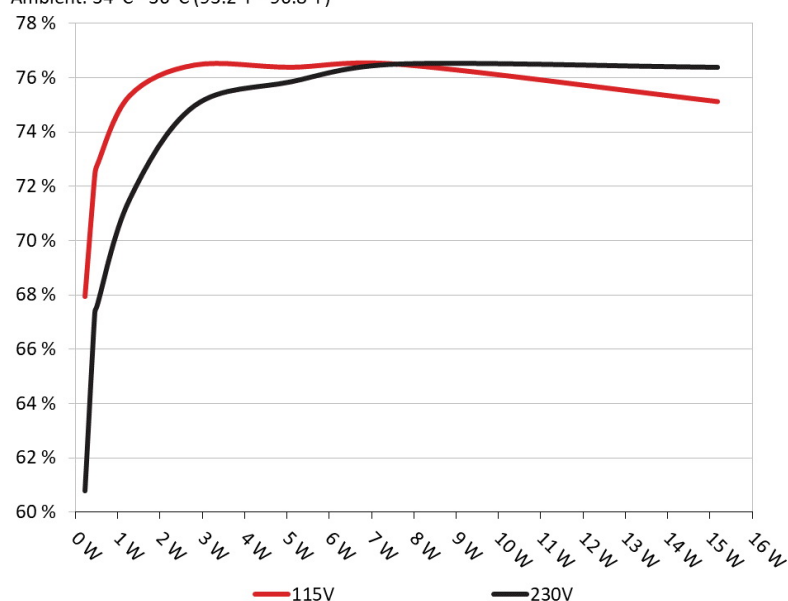

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Phanteks AMP 750W (#2)

5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.231	67.941%	0.057
	5.135V	0.340		115.12V
2	0.090A	0.462	72.414%	0.103
	5.133V	0.638		115.12V
3	0.550A	2.818	76.472%	0.341
	5.122V	3.685		115.12V
4	1.000A	5.112	76.390%	0.409
	5.111V	6.692		115.12V
5	1.500A	7.650	76.500%	0.443
	5.099V	10.000		115.12V
6	3.000A	15.175	75.127%	0.487
	5.058V	20.199		115.12V

5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.231	60.789%	0.020
	5.135V	0.380		230.23V
2	0.090A	0.462	67.347%	0.035
	5.133V	0.686		230.24V
3	0.550A	2.818	74.967%	0.166
	5.122V	3.759		230.24V
4	1.000A	5.112	75.857%	0.247
	5.111V	6.739		230.23V
5	1.500A	7.650	76.508%	0.301
	5.099V	9.999		230.24V
6	3.000A	15.187	76.386%	0.375
	5.062V	19.882		230.24V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 5/16

Anex

Phanteks AMP 750W (#2)


115V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 6/16


EFFICIENCY GRAPH 115V

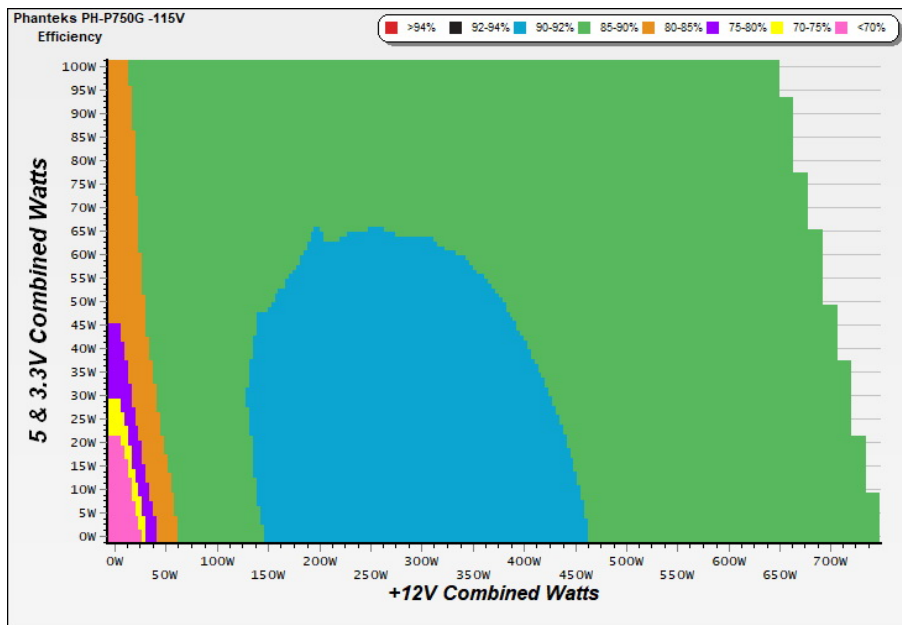

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 115V

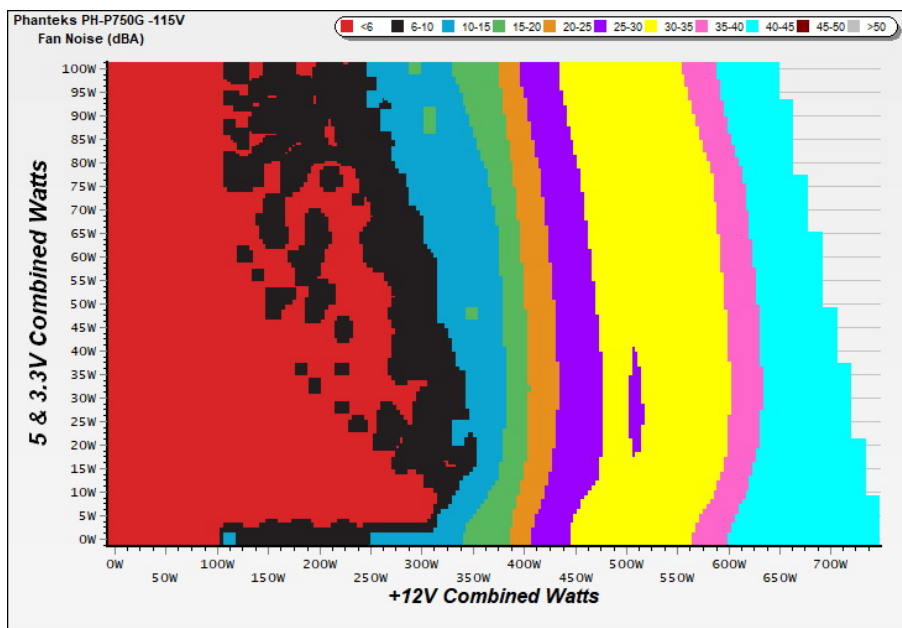

INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -115V

Power - R1906AA252140121 - 13/12/2019 - 11:18

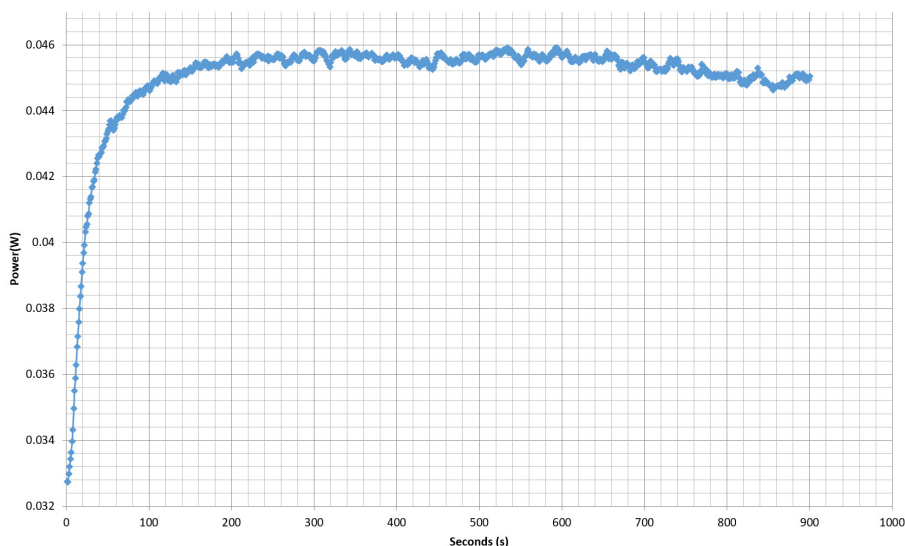

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

Anex

Phanteks AMP 750W (#2)

10-110% LOAD TESTS 115V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
1	4.380A	2.001A	1.986A	0.980A	74.947	85.385%	0	<6.0	43.87°C	0.935
	12.182V	4.996V	3.319V	5.103V	87.775				40.45°C	115.08V
2	9.776A	3.003A	2.985A	1.179A	149.995	88.996%	497	7.3	40.84°C	0.963
	12.182V	4.995V	3.317V	5.091V	168.541				44.54°C	115.08V
3	15.514A	3.504A	3.483A	1.378A	224.995	89.940%	577	8.6	41.48°C	0.976
	12.179V	4.994V	3.316V	5.080V	250.160				45.85°C	115.08V
4	21.255A	4.005A	3.984A	1.578A	300.000	90.050%	887	17.4	41.73°C	0.981
	12.176V	4.993V	3.314V	5.069V	333.148				46.69°C	115.08V
5	26.609A	5.010A	4.980A	1.780A	374.438	89.769%	1327	29.3	42.46°C	0.985
	12.174V	4.991V	3.312V	5.057V	417.115				47.77°C	115.08V
6	32.004A	6.014A	5.982A	1.983A	449.366	89.318%	1646	33.1	42.57°C	0.986
	12.172V	4.989V	3.311V	5.044V	503.109				48.61°C	115.08V
7	37.439A	7.019A	6.982A	2.186A	524.709	88.799%	1934	39.8	43.03°C	0.987
	12.169V	4.988V	3.309V	5.032V	590.896				49.70°C	115.08V
8	42.863A	8.002A	7.981A	2.392A	599.896	88.120%	2084	41.3	43.46°C	0.989
	12.169V	4.986V	3.307V	5.019V	680.772				51.15°C	115.08V
9	48.659A	8.526A	8.470A	2.395A	674.533	87.620%	2104	41.5	44.10°C	0.990
	12.167V	4.985V	3.305V	5.012V	769.841				52.19°C	115.08V
10	54.250A	9.032A	8.989A	3.007A	749.767	86.758%	2113	41.9	45.56°C	0.991
	12.167V	4.983V	3.304V	4.989V	864.203				54.30°C	115.08V
11	60.422A	9.036A	8.992A	3.011A	824.988	85.924%	2118	42.2	46.81°C	0.991
	12.169V	4.982V	3.302V	4.983V	960.139				56.63°C	115.08V
CL1	0.100A	12.001A	11.999A	0.000A	100.796	84.225%	592	8.7	42.15°C	0.951
	12.188V	4.987V	3.311V	5.112V	119.675				47.57°C	115.10V
CL2	62.007A	1.000A	1.000A	1.000A	767.602	87.196%	2109	41.7	45.00°C	0.991
	12.164V	4.991V	3.310V	5.048V	880.314				54.66°C	115.08V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 9/16

Anex

Phanteks AMP 750W (#2)

20-80W LOAD TESTS 115V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	PF/AC Volts
1	1.219A	0.499A	0.495A	0.195A	19.978	69.390%	0	<6.0	0.767
	12.170V	5.003V	3.325V	5.128V	28.791				115.08V
2	2.438A	0.999A	0.992A	0.391A	39.965	79.815%	0	<6.0	0.880
	12.172V	4.998V	3.321V	5.122V	50.072				115.08V
3	3.659A	1.500A	1.490A	0.587A	59.996	84.029%	0	<6.0	0.918
	12.176V	4.997V	3.320V	5.115V	71.399				115.08V
4	4.874A	2.000A	1.987A	0.783A	79.946	86.102%	0	<6.0	0.937
	12.179V	4.996V	3.319V	5.108V	92.850				115.08V

RIPPLE MEASUREMENTS 115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	8.40mV	13.10mV	12.10mV	5.70mV	Pass
20% Load	11.60mV	14.30mV	15.30mV	6.10mV	Pass
30% Load	14.20mV	15.20mV	15.20mV	6.40mV	Pass
40% Load	16.00mV	15.40mV	14.60mV	6.50mV	Pass
50% Load	18.60mV	16.70mV	16.80mV	6.70mV	Pass
60% Load	16.20mV	17.50mV	16.50mV	6.90mV	Pass
70% Load	16.40mV	18.00mV	16.30mV	7.00mV	Pass
80% Load	17.60mV	18.60mV	16.60mV	7.70mV	Pass
90% Load	18.90mV	19.60mV	17.40mV	7.90mV	Pass
100% Load	29.60mV	22.20mV	17.70mV	8.10mV	Pass
110% Load	32.90mV	21.40mV	18.10mV	8.20mV	Pass
Crossload1	14.50mV	20.00mV	14.00mV	6.80mV	Pass
Crossload2	30.40mV	16.20mV	16.00mV	7.50mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 10/16

Anex

Phanteks AMP 750W (#2)


230V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 11/16


EFFICIENCY GRAPH 230V

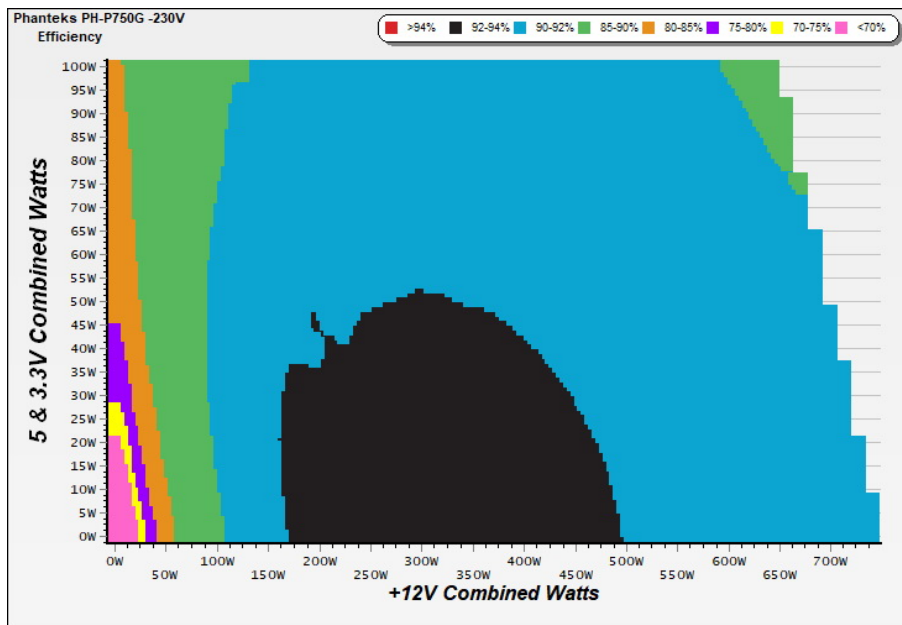

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 230V

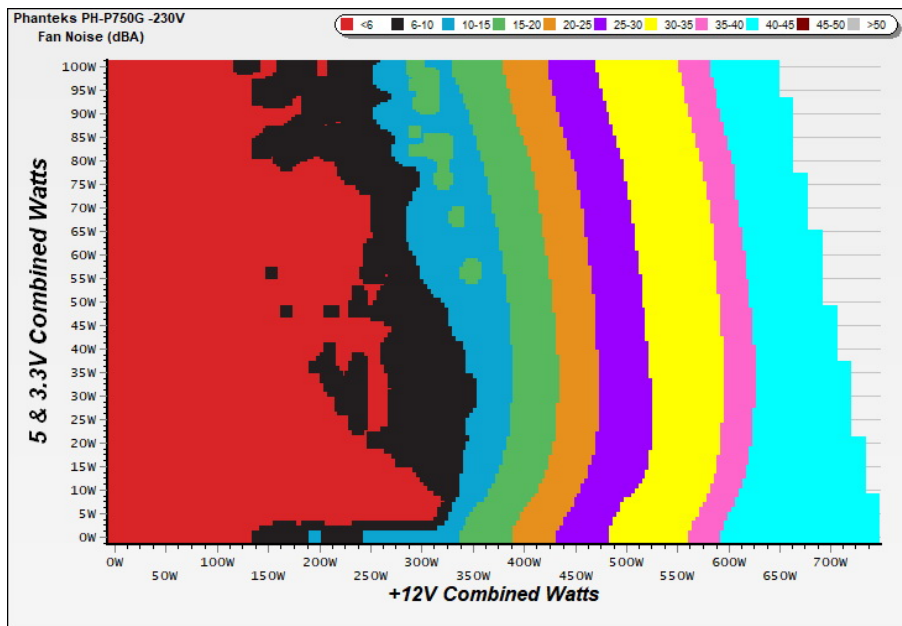

INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Phanteks AMP 750W (#2)

VAMPIRE POWER -230V

Power - R1906AA252140121 - 13/12/2019 - 11:18

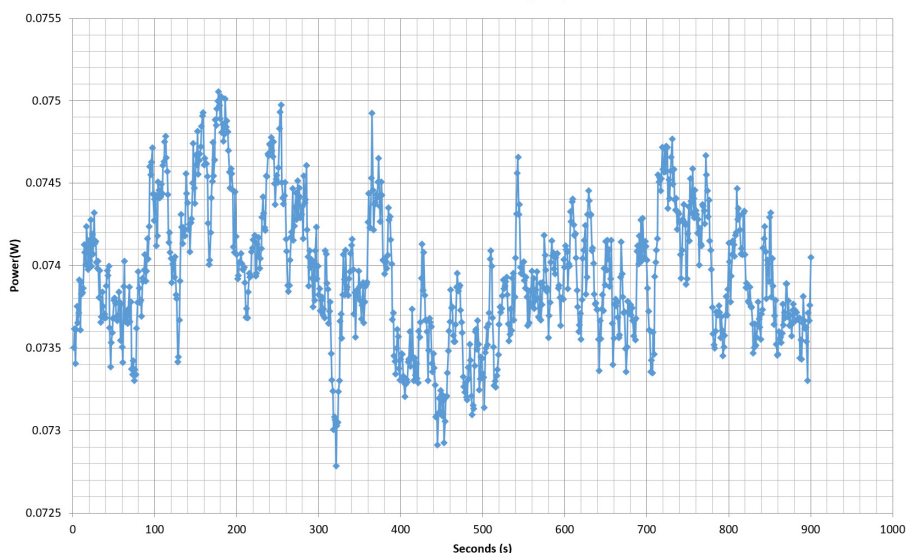

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 13/16

Anex

Phanteks AMP 750W (#2)

10-110% LOAD TESTS 230V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
1	4.382A	2.001A	1.988A	0.980A	74.960	86.438%	0	<6.0	43.52°C	0.772
	12.178V	4.996V	3.319V	5.103V	86.721				40.26°C	230.23V
2	9.782A	3.004A	2.985A	1.179A	150.030	90.722%	0	<6.0	44.65°C	0.893
	12.178V	4.994V	3.317V	5.091V	165.374				40.85°C	230.23V
3	15.521A	3.506A	3.485A	1.378A	225.040	91.666%	636	9.4	41.01°C	0.932
	12.176V	4.993V	3.315V	5.079V	245.501				45.16°C	230.23V
4	21.262A	4.004A	3.983A	1.579A	300.055	91.894%	1145	25.0	41.59°C	0.951
	12.175V	4.992V	3.314V	5.068V	326.523				46.51°C	230.23V
5	26.617A	5.010A	4.982A	1.780A	374.535	91.813%	1409	30.9	42.03°C	0.962
	12.174V	4.990V	3.312V	5.056V	407.932				47.62°C	230.24V
6	32.012A	6.014A	5.983A	1.983A	449.458	91.522%	1769	35.2	42.36°C	0.968
	12.172V	4.989V	3.310V	5.043V	491.095				48.64°C	230.24V
7	37.448A	7.021A	6.984A	2.187A	524.788	91.238%	2042	41.5	43.17°C	0.973
	12.168V	4.987V	3.308V	5.032V	575.187				50.07°C	230.24V
8	42.876A	8.005A	7.985A	2.392A	599.978	90.848%	2096	41.1	43.43°C	0.976
	12.167V	4.985V	3.306V	5.018V	660.422				51.00°C	230.23V
9	48.667A	8.529A	8.470A	2.395A	674.634	90.491%	2107	41.5	44.68°C	0.979
	12.167V	4.984V	3.305V	5.011V	745.528				53.22°C	230.24V
10	54.254A	9.033A	8.991A	3.007A	749.864	89.911%	2113	41.9	45.21°C	0.981
	12.168V	4.982V	3.303V	4.989V	834.007				54.37°C	230.24V
11	60.429A	9.035A	8.996A	3.011A	825.069	89.373%	2121	42.3	46.63°C	0.982
	12.169V	4.981V	3.302V	4.982V	923.179				56.40°C	230.24V
CL1	0.100A	12.002A	11.998A	0.000A	100.799	85.143%	1139	25.1	41.92°C	0.843
	12.190V	4.987V	3.311V	5.111V	118.388				47.57°C	230.25V
CL2	62.007A	1.000A	1.001A	1.000A	767.605	90.416%	2114	42.0	45.43°C	0.981
	12.164V	4.990V	3.310V	5.048V	848.975				54.04°C	230.24V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 14/16

Anex

Phanteks AMP 750W (#2)

20-80W LOAD TESTS 230V

Test #	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	PF/AC Volts
1	1.219A	0.500A	0.495A	0.195A	19.987	71.022%	0	<6.0	0.494
	12.175V	5.002V	3.324V	5.128V	28.142				230.22V
2	2.438A	1.000A	0.993A	0.391A	39.977	80.649%	0	<6.0	0.608
	12.174V	4.997V	3.321V	5.121V	49.569				230.22V
3	3.660A	1.500A	1.491A	0.587A	60.008	84.960%	0	<6.0	0.717
	12.175V	4.997V	3.320V	5.114V	70.631				230.23V
4	4.876A	2.000A	1.988A	0.783A	79.959	87.232%	0	<6.0	0.785
	12.176V	4.996V	3.319V	5.107V	91.662				230.23V

RIPPLE MEASUREMENTS 230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	7.9 mV	11.6 mV	10.4 mV	5.0 mV	Pass
20% Load	11.7 mV	12.8 mV	10.9 mV	6.1 mV	Pass
30% Load	13.7 mV	14.3 mV	11.5 mV	6.0 mV	Pass
40% Load	16.6 mV	15.5 mV	12.3 mV	6.2 mV	Pass
50% Load	17.2 mV	16.8 mV	13.0 mV	6.4 mV	Pass
60% Load	16.9 mV	16.7 mV	14.2 mV	6.3 mV	Pass
70% Load	16.6 mV	17.0 mV	14.1 mV	6.3 mV	Pass
80% Load	17.5 mV	18.1 mV	15.7 mV	6.9 mV	Pass
90% Load	19.9 mV	19.4 mV	16.6 mV	6.9 mV	Pass
100% Load	30.3 mV	21.1 mV	17.2 mV	7.3 mV	Pass
110% Load	33.0 mV	21.1 mV	18.2 mV	7.0 mV	Pass
Crossload 1	13.7 mV	19.6 mV	13.0 mV	6.0 mV	Pass
Crossload 2	30.4 mV	16.1 mV	16.3 mV	7.0 mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 15/16

Anex

Phanteks AMP 750W (#2)



Top side




Power specifications label

CERTIFICATIONS 115V



CERTIFICATIONS 230V



All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case