



SILVERSTONE

Gemini Series

GM600 Silver

Cybenetics Silver 600W mini redundant power supply



600W

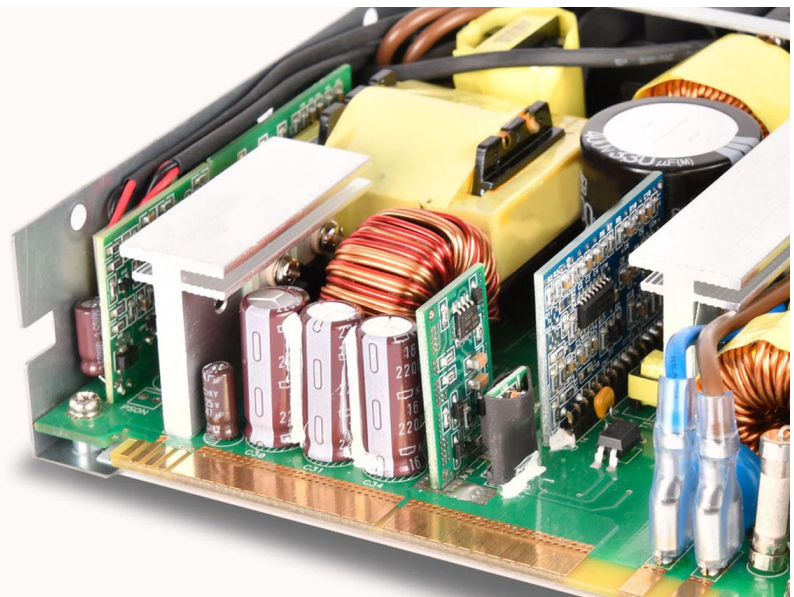


- 600+600W 24 hours and well-working performance at 50°C fully continuous power output
- 1+1 redundant configuration
- Japanese electrolytic capacitors
- Hot swappable design
- Convenient pull-out handle bars
- Industry-leading reliability

Specifications

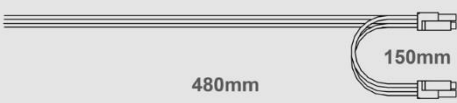
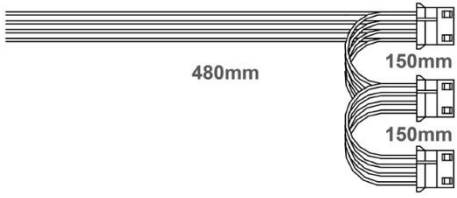
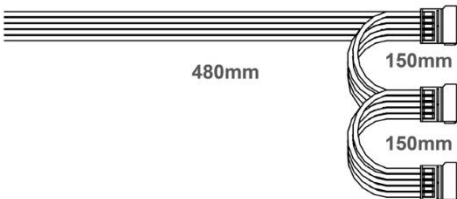
Product No.	SST-GM600-S
Color	Silver
MTBF	100,000 hours
Operating temperature	0°C ~ 50°C
Cooling system	40mm DC fans
Noise level	51 dBA
Protection	Over current protection Over voltage protection Over temperature protection Short circuit protection
Dimension	150mm (W) x 86mm (H) x 199mm (D) 5.91" (W) x 3.39" (H) x 7.83" (D) (Housing without bracket) 150mm (W) x 86mm (H) x 212mm 5.91" (W) x 3.39" (H) x 8.35" (D) (Housing with bracket, without handle) 140mm (W) x 40mm (H) x 175mm (D) 5.51" (W) x 1.57" (H) x 6.89" (D) (Module only without handle)

All Japanese electrolytic capacitors





Connectors / Cable

Photo	Type	Connector quantity per cable	Cable quantity	Length
	MB 20+4P connector	1	1	 480mm
	CPU 4+4P connector	1	2	 480mm 150mm
	Peripheral 4P connector	3	1	 480mm 150mm 150mm
	Peripheral 4P connector	3	1	 480mm 150mm 150mm
	4P Floppy connector	1		
	SATA connector	3	1	 480mm 150mm 150mm
	PCIe 6+2P connector	1	2	 480mm
	2-Pin + 5V TTL signal connector	1	1	 TTL Signal Cable 860mm