SILVERSTONE®
Designing Inspiration

STRIDER SERIES

# SST-ST70F

## Elevated high affordability and great performance, at ease

Ultra silent running 135mm fan with 18dBA
80% ~ 87% efficiency at 20% ~ 100% loading
700W continuous power output rated (Peak 780W)
Quad +12V with continuous 50A combined output
Quad PCI-E 6pin, single PCI-E 8pin
100% modular cables with cable bag

# SPECIFICATION

SilverStone Strider SST-ST70F
ATX12V 2.3 Switching Power Supply
With Active PFC
PS/2 700W

This specification describes the requirements of 700W with active P.F.C Switching Power Supply with an stretch form-factor,+5V standby voltage, fan control, EPS12V Power supply version 2.91, remote on/off control, full range input capability and forced air cooling characteristics.

## 1. AC INPUT REQUIREMENTS

The input voltage, current, and frequency requirements for continuous operation are stated below.

| Parameter | Min | Nom. | Max | Unit |
|---|---|---|---|---|
| Vin | 90 | 100 ~ 240 | 265 | VACrms |
| Vin Frequency | 47 | 60 ~ 50 | 63 | Hz |
| Iin | – | 12 - 6 | – | A |

Power factor correction (PF)>0.90 at full load.

### 1.1 Inrush current limiting

50A @ 115Vrms
100A @ 230Vrms (at 25℃ ambient cold start).

## 2. DC OUTPUT

### 2.1 Table 1. DC voltage regulation

| Parameter | Range | Min | Nom. | Max | Unit |
|---|---|---|---|---|---|
| +3.3V | +/-5% | +3.14 | +3.3 | +3.47 | Volts |
| +5V | +/-5% | +4.75 | +5.0 | +5.25 | Volts |
| +5VSB | +/-5% | +4.75 | +5.0 | +5.25 | Volts |
| -12V | +/-10% | -10.80 | -12.0 | -13.2 | Volts |
| +12V1 | +5/-5% | +11.40 | +12.0 | +12.6 | Volts |
| +12V2 | +5/-5% | +11.40 | +12.0 | +12.6 | Volts |
| +12V3 | +5/-5% | +11.40 | +12.0 | +12.6 | Volts |
| +12V4 | +5/-5% | +11.40 | +12.0 | +12.6 | Volts |

## 2.2 Table5 Typical Power Distribution for a 700W ATX12V Configuration

| Parameter | Min | Nom. | Max | Peak | Unit |
|---|---|---|---|---|---|
| +12V1DC | 0.8 | – | 18.0 | – | Amps |
| +12V2DC | 0.8 | – | 18.0 | – | Amps |
| +12V3DC | 0.5 | – | 18.0 | – | Amps |
| +12V4DC | 1 | – | 18.0 | – | Amps |
| +5VDC | 1 | – | 30 | – | Amps |
| +3.3VDC | 1.5 | – | 24 | – | Amps |
| -12VDC | 0.0 | – | 0.5 | – | Amps |
| +5VSB | 0.1 | – | 3.0 | 3.5 | Amps |

Note:
1. The maximum combined load on +5V and +3.3V output shall not exceed 170 watts .
2. The maximum peak total DC output power shall not exceed 780 watts
3. The maximum continuous average DC output power shall not exceed 700 watts
4. The all +12V output maximum combined load shall not exceed 50A

## 2.3 DC Output Ripple/Noise.

### 2.3.1 Talbe6 Ripple regulation

| Parameter | Ripple+Noise | Unit |
|---|---|---|
| +3.3V | 50 | mVp-p |
| +5V | 50 | mVp-p |
| +12V1 | 120 | mVp-p |
| +12V2 | 120 | mVp-p |
| -12V | 120 | mVp-p |
| +5VSB | 50 | mVp-p |
| +12V3 | 120 | mVp-p |
| +12V4 | 120 | mVp-p |

### 2.3.2 Definition

The ripple voltage of the outputs shall be measured at the pins of the output connector when terminated in the load impedance specified in figure 1. Ripple and noise are measured at the connectors with a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor to simulate system loading.Ripple shall be measured under any condition of line voltage,output load,line frequency,operation temperature.

### 2.3.3 Ripple/Noise voltage test circuit

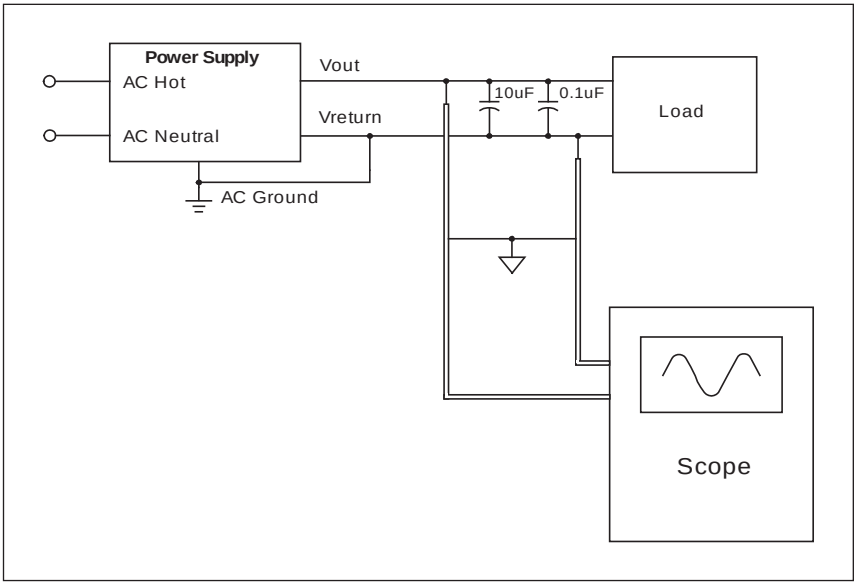



Figure 3. Ripple/Noise voltage test circuit

### 2.4 Overshoot

Any overshoot at turn on or turn off shall be less 10% of the nominal voltage value, all outputs shall be within the regulation limit of section 2.0 before issuing the power good signal of section 4.0.

### 2.5 Efficiency

**2.5.1** Power supply typical efficiency is 78% at nominal input voltage of 115VAC or 230VAC.

**2.5.2 Other Low Power System Requirements**

To help meet the Blue Angel*, RAL-UZ 78, US Presidential executive order 13221, future EPA requirements, and other low Power system requirements, it is recommended that the +5VSB standby supply should be as efficient as possible. Standby efficiency is measured with the main outputs off (PS_ON# high state). Standby efficiency should be greater than 50% with a minimum loading of 100mA at input 115Vac. Pin <1W with a minimum loading of 50mA at input 230Vac.

### 2.6 Remote on/off control

When the logic level "PS-ON" is low, the DC outputs are to be enabled.
When the logic level is high or open collector, the DC outputs are to be disabled.

# 3. PROTECTION

### 3.1 Over-power protection

The power supply will be shutdown and latch off when output power is 110%~150%.

### 3.2 Over voltage protection

The over voltage sense circuitry and reference shall reside in packages that are separate and distinct from the regulator control circuity and reference.No single point fault shall be able to cause a sustained over voltage condition on any or all outputs. The supply shall provide latch-mode over voltage protection as defined in Table.

| output | Minimum | Nominal | Maximum | Unit |
|---|---|---|---|---|
| +12V1DC, +12V4DC | 13.3 | 15 | 16 | Volts |
| +5VDC | 5.5 | 6.3 | 7.0 | Volts |
| +3.3VDC | 3.76 | 4.2 | 4.8 | Volts |

### 3.3 Under voltage protection

The under voltage sense circuitry and reference shall reside in packages that are separate and distinct from the regulator control circuity and reference.No single point fault shall be able to cause a sustained under voltage condition on any or all outputs. The supply shall provide latch-mode under voltage protection as defined in Table.

| output | Minimum | Nominal | Maximum | Unit |
|---|---|---|---|---|
| +12V1DC , +12V4DC | 9.5 | 10.0 | 10.5 | Volts |
| +5VDC | 4.1 | 4.3 | 4.47 | Volts |
| +3.3VDC | 2.55 | 2.69 | 2.83 | Volts |

### 3.4 Over Current Protection

| output | Minimum | Nominal | Maximum | Unit |
|---|---|---|---|---|
| +12V1DC | 18.5 | - | 24 | A |
| +12V2DC | 18.5 | - | 24 | A |
| +12V3DC | 18.5 | - | 24 | A |
| +12V4DC | 18.5 | - | 24 | A |
| +5VDC | 33 | - | 45 | A |
| +3.3VDC | 26.4 | - | 36 | A |

### 3.5 Short circuit

An output short circuit is defined as any output impedance of less than 0.1 ohms.The power supply shall shut down and latch off for shorting the +3.3VDC,+5VDC,or+12VDC rails to return or any other rail. Shorts between main output rails and +5VSB shall not

cause any damage to the power supply. The power supply shall either shut down and latch off or fold back for shorting the negative rails.+5VSB must be capable of being shorted indefinitely,but when the short is removed,the power supply shall recover automatically or by cycling PS_ON#.The power supply shall be capable of withstanding a continuous short-circuit to the output without damage or overstress to the unit.

### 3.6 No load operation

No damage or hazardous condition should occur with all the DC output connectors disconnected from the load.The power supply may latch into the shutdown state.

### 3.7 Over temperature protection

In the event of a fan failure or the vents being blocked, the power supply shall have protection such that any over temperature condition caused by these events shall protect the power supply from damage or abnormal and/or dangerous operation.A shutdown of the power supply is acceptable A temperature derating factor less than 110% for the critical components is recommended before the power supply is shut down.

Temperature derating factors higher than 110% can be evaluated on a case by case basis.

## 4. TIMING

### 4.1 Signal timing drawing

Figure 4 is a reference for signal timing for main power connector signals and rails.

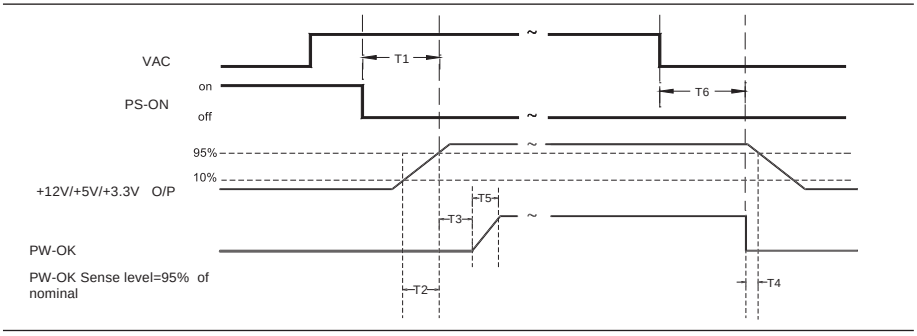



Figure 4. PS-OK Timing Sequence

(1)T2: Rise time (1ms~70ms)
(2)T3: Power good turn on delay time (100ms~500ms)
(3)T4: Power good turn off delay time (1ms min)
(4)T5: Rise time (10ms max)

### 4.2 Hold up time (T6 of figure 4.)

When the power loss its input power, the output shall maintain 16ms at 75% full load at nominal input voltage. (AC:115V/60Hz or 230V/50Hz)

## 5. ENVIRONMENT

### 5.1 Operation

| | |
|---|---|
| Temperature | 0°C to 40°C |
| Relative Humidity | 20 to 85%, non-condensing |

### 5.2 Shipping and Storage

| | |
|---|---|
| Temperature | -40°C to70°C |
| Relative Humidity | 5 to 90%, non-condensing |

### 5.3 Altitude

| | |
|---|---|
| Operating | 3,000FT max. |
| Storage | 15,000FT max. |

## 6. SAFETY

### 6.1 Underwriters Laboratory (UL) recognition.

The power supply designed to meet UL 1950.

### 6.2 The power supply must bear the German Bauart Mark from TUV.

## 7.0 ELECTROMAGNETIC COMPATIBILITY (EMC)

**7.1 ELECTROSTATIC DISCHARGE (ESD) – EN 61000 – 4 - 2：1995**

**7.2 ELECTRICAL FAST TRANSIENT / BURST ( EFT/B) – EN 61000 – 4 - 4：1995**

**7.3 SURGE – EN 61000 – 4 - 5：1995**

**7.4 POWER FREQUENCY MAGNETIC FIELD – EN 61000 – 4 - 8：1993**

**7.5 VOLTAGE DIPS – RN 61000 – 4 - 11：1994**

**7.6 RADIATED SUSCEPTIBILTY – EN 61000 – 4 - 3：1996**

**7.7 CONDUCTED SUSCEPTIBILTY – EN 61000 – 4 - 6：1996**

**7.8 VOLTAGE FLUCTATION – EN 61000 – 3 - 3：1995**

### 7.9 EN61000-3-2 harmonic current emissions.

If applicable to sales in Europe, the power supply shall meet the requirements of EN 61000-3-2 Class D and the Guidelines for the Suppression of Harmonics in Appliances and General Use Equipment Class D for harmonic line current content at full-rated power.

### 7.10 EN55022 Class B Radio interference (CISPR 22).

### 7.11 FCC Part 15, Subpart J class B 115VAC operation.

## 8. MTBF

### 8.1 MTBF (MEAN TIME BETWEEN FAILURES) CALCULATION

The demonstrated MTBF shall be 100,000 hours of continuous operation at 25 °C,full load,80% confidence limit and nominal line. The MTBF of the power supply shall be calculated in accordance with MIL-STD-217D/E. The DC FAN is not included.

## 9. MECHANICAL REQUIREMENTS

### 9.1 Physical Dimension

150mm (W) × 86mm (H) × 160mm (D)

### 9.2 Connectors

M/B 24PIN connector

| 18AWG wire | Signal | Pin | Pin | Signal | 18AWG wire |
|---|---|---|---|---|---|
| Orange | +3.3V | 13 | 1 | +3.3V | Orange |
| Orange(22AWG) | +3.3Vsense | 13 | 1 | +3.3V | Orange |
| Blue (18AWG) | -12VDC | 14 | 2 | +3.3V | Orange |
| Black | COM | 15 | 3 | COM | Black |
| Green(18AWG) | PS-ON | 16 | 4 | +5VDC | Red |
| Black | COM | 17 | 5 | COM | Black |
| Black | COM | 18 | 6 | +5VDC | Red |
| Black | COM | 19 | 7 | COM | Black |
| White | N/C | 20 | 8 | PWRGOOD | Grey (18AWG) |
| Red | +5VDC | 21 | 9 | +5Vsb | Purple |
| Red | +5VDC | 22 | 10 | +12V2 | Yellow/Black stripe |
| Red (22AWG) | +5Vsense | 22 | | | |
| Red | +5VDC | 23 | 11 | +12V2 | Yellow/Black stripe |
| Black | COM | 24 | 12 | +3.3V | Orange |

EPS 12V 8PIN connector

| 18AWG wire | Signal | Pin | Pin | Signal | 18AWG wire |
|---|---|---|---|---|---|
| Yellow | +12V2 | 5 | 1 | COM | Black |
| Yellow | +12V2 | 6 | 2 | COM | Black |
| Yellow/Black stripe | +12V1 | 7 | 3 | COM | Black |
| Yellow/Black stripe | +12V1 | 8 | 4 | COM | Black |

ATX 12V 4PIN

| 18AWG wire | Signal | Pin | Pin | Signal | 18AWG wire |
|---|---|---|---|---|---|
| Black | GND | 1 | 3 | +12V1 | Yellow |
| Black | GND | 2 | 4 | +12V1 | Yellow |

4PIN peripheral connector (HDD)

4PIN floppy connector (FDD)

| 18AWG wire | Signal | Pin | Pin | Signal | 22AWG wire |
|---|---|---|---|---|---|
| Yellow/White stripe | +12V2 | 1 | 1 | +5VDC | Red |
| Black | COM | 2 | 2 | COM | Black |
| Black | COM | 3 | 3 | COM | Black |
| Red | +5VDC | 4 | 4 | +12V2 | Yellow/White stripe |

SATA connector

| 18AWG wire | Signal | Pin |
|---|---|---|
| Orange | +3.3V | 5 |
| Black | COM | 4 |
| Red | +5V | 3 |
| Black | COM | 2 |
| Yellow/White stripe | +12V3 | 1 |

6PIN PCI Express connector #1 & #2

| 18AWG wire | Signal | Pin | Pin | Signal | 18AWG wire |
|---|---|---|---|---|---|
| Yellow/Blue stripe | +12V3 | 1 | 4 | COM | Black |
| Yellow/Blue stripe | +12V3 | 2 | 5 | COM | Black |
| Yellow/Blue stripe | +12V3 | 3 | 6 | COM | Black |

6PIN PCI Express connector #3 & #4

| 18AWG wire | Signal | Pin | Pin | Signal | 18AWG wire |
|---|---|---|---|---|---|
| Yellow/Blue stripe | +12V4 | 1 | 4 | COM | Black |
| Yellow/Blue stripe | +12V4 | 2 | 5 | COM | Black |
| Yellow/Blue stripe | +12V4 | 3 | 6 | COM | Black |

8PIN PCI Express connector

| 18AWG wire | Signal | Pin | Pin | Signal | 22AWG wire |
|---|---|---|---|---|---|
| Yellow/Blue stripe | +12V4 | 1 | 5 | COM | Black |
| Yellow/Blue stripe | +12V4 | 2 | 6 | COM | Black |
| Yellow/Blue stripe | +12V4 | 3 | 7 | COM | Black |
| Black sense1 | COM | 4 | 8 | COM | Black |

## 10. FAN SPEED CONTROL

Fan voltage varies with the ambient temperature or output power.

To be valid, this sheet must be filled out by
your salesperson at the time of purchase.

Store :
Purchaser :
Purchase date :
Model No. :
Serial No. :

*SilverStone Technology Co., Ltd.*

**www.silverstonetek.com**

support@silverstonetek.com
Issue date: January, 2008