


Datasheet

Hörmann Air

Part No: 100552



About the product

Loxone Hörmann Air is a **compact interface module** for integrating **Hörmann door drives**.

Features:

- Compatible with Hörmann communication protocol 1 and 2 (HCP)
- Automatically detects which door drive is connected and which HCP version is being used
- Logs and monitors operating hours, counting cycles and maintenance intervals

Technical Data

Power Supply	10 ... 28VDC
Power consumption	typ. 0.23W, max. 0.3W

Interfaces

Loxone Air	868MHz (SRD Band Europe), 4 channels, max. 15.1mW e.r.p. 915MHz (ISM Band Region 2), 10 channels, max. 13.2mW internal antenna
------------	---

Compatible Hörmann operators

Compatible Hörmann operators	Operator	Protocol, compatible from Hörmann Softwareindex / Date
	SupraMatic E/P 4	
	ProMatic 4	HCP2, from B4 / 03-2021
	SupraMatic 3	HCP2, from B3 / 03-2021
	SupraMatic HT3	HCP1, from Ci / 07-2013
	Liftronic 700-2	HCP1, from B0 / 07-2014
	Liftronic 800-2	HCP2, from B0 / 03-2021
	RollMatic 2	HCP2, from B0 / 03-2021
	LineaMatic / P / H	HCP2, from B0 / 04-2022
	LineaMatic 2 / P 2 / H 2	HCP1, from E / 07-2013
	RotaMatic RotaMatic 2 / P	HCP1, from A / 03-2017
	2 / PL 2	HCP1, from G / 08-2013
	VersaMatic	HCP1, from A / 03-2017
	Control 545/560 with	HCP1, from A / 07-2016
	WA/ITO 500	HCP2, from B1 / 06-2021
	Control 560 with STA 500	HCP2, from B1 / 06-2022
	FU	

Connection Diagram

Connection Diagram	
--------------------	--

Product Characteristics

Colours	Green RAL6018
Finish	Matte

Weight & Dimensions

Total weight	74 g
Product dimensions	38.3x34.3x10.5mm / 1.50x1.35x0.41" (LxWxH)
Product dimensions drawing	
Pack size	79x79x41mm / 3.11x3.11x1.61" (LxWxH)



Installation must be carried out by a qualified electrician in accordance with the relevant regulations.


Published by
Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK
Loxone UK
The Forum
Station Road
Theale, RG7 4RA
United Kingdom

Datenblatt

Hörmann Air

Part No: 100552



Über das Produkt

Loxone Hörmann Air ist ein **kompaktes Schnittstellenmodul** zur Einbindung von **Hörmann Torantrieben**.

Features:

- Kompatibel mit Hörmann Kommunikationsprotokoll 1 und 2 (HCP)
- Erkennt automatisch, welcher Torantrieb angeschlossen ist und welche HCP Version verwendet wird
- Protokolliert und überwacht Betriebsstunden, Zählzyklen und Wartungsintervalle

Technische Daten

Spannungsversorgung	10 ... 28VDC
Leistungsaufnahme	typ. 0.23W, max. 0.3W

Schnittstellen


Loxone Air	868MHz (SRD Band Europa), 4 Kanäle, max. 15.1mW e.r.p. 915MHz (ISM Band Region 2), 10 Kanäle, max. 13.2mW interne Antenne
------------	---

Kompatible Hörmann Antriebe


Kompatible Hörmann Antriebe	Antrieb	Protokoll, kompatibel ab Hörmann Softwareindex / Datum
	SupraMatic E/P 4	HCP2, ab B4 / 03-2021
	ProMatic 4	HCP2, ab B3 / 03-2021
	SupraMatic 3	HCP1, ab Ci / 07-2013
	SupraMatic HT3	HCP1, ab B0 / 07-2014
	Liftronic 700-2	HCP2, ab B0 / 03-2021
	Liftronic 800-2	HCP2, ab B0 / 03-2021
	RollMatic 2	HCP2, ab B0 / 04-2022
	LineaMatic / P / H	HCP1, ab E / 07-2013
	LineaMatic 2 / P 2 / H 2	HCP1, ab A / 03-2017
	RotaMatic RotaMatic 2 / P 2 /	HCP1, ab G / 08-2013
	PL 2	HCP1, ab A / 03-2017
	VersaMatic Steuerung 545/560	HCP1, ab A / 07-2016
	mit WA/ITO 500	HCP2, ab B1 / 06-2021
	Steuerung 560 mit STA 500 FU	HCP2, ab B1 / 06-2022

Anschlussplan

Hörmann Air

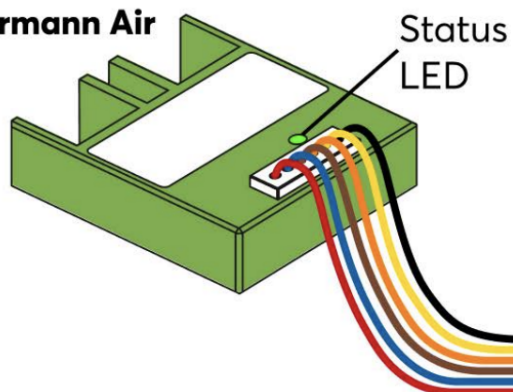

Hörmann operator




Produkteigenschaften

Farbe	Grün RAL6018
Glanzgrad	Matt

Gewicht & Abmessungen

Bruttogewicht	74 g
Produktmaße	38.3x34.3x10.5mm / 1.50x1.35x0.41" (LxWxH)

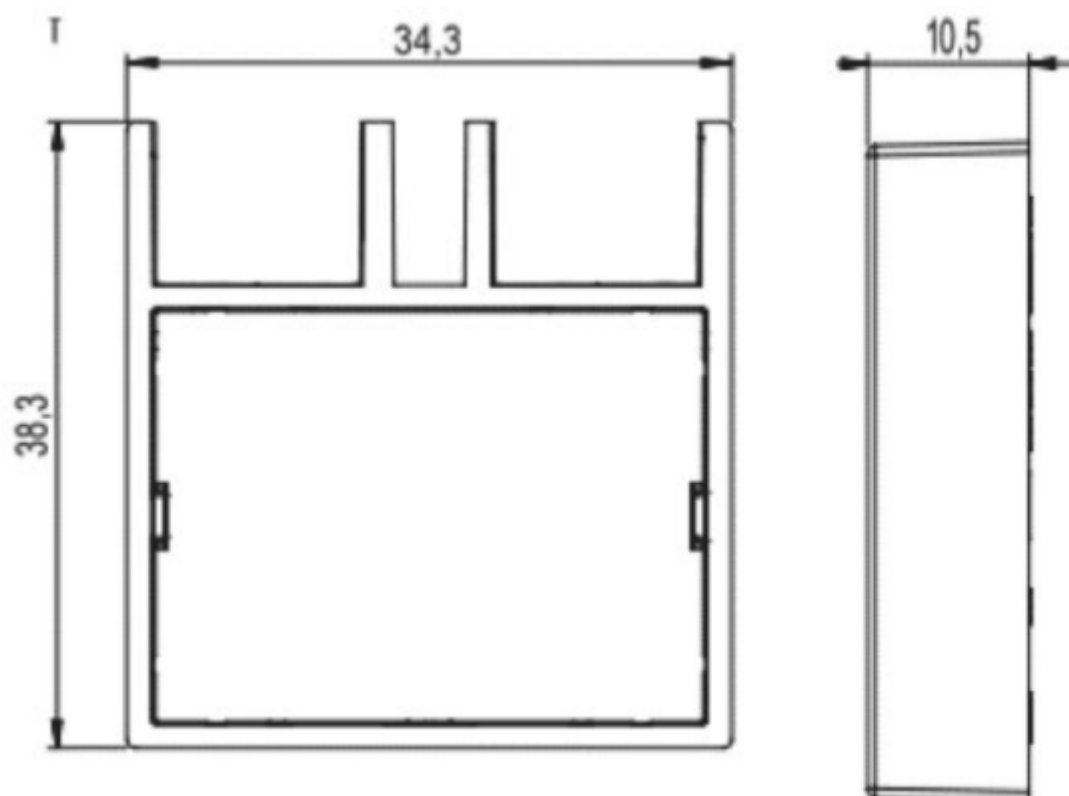

Packmaß	79x79x41mm / 3,11x3,11x1,61" (LxBxH)
---------	--------------------------------------



Die Installation muss von einer qualifizierten Elektrofachkraft gemäß den einschlägigen Vorschriften durchgeführt werden.

Veröffentlicht von
Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK
Loxone UK
The Forum
Station Road
Theale, RG7 4RA
United Kingdom