

Anex

Cougar Polar 1050W

Lab ID#: CG10502005
Receipt Date: Apr 5, 2022
Test Date: Apr 21, 2022

Report: 22PS2005A
Report Date: Apr 21, 2022

DUT INFORMATION	
Brand	Cougar
Manufacturer (OEM)	XHY-Power
Series	Polar
Model Number	CGR PR-1050
Serial Number	12BB02PR10500001
DUT Notes	

DUT SPECIFICATIONS	
Rated Voltage (Vrms)	100-240
Rated Current (Arms)	15-7
Rated Frequency (Hz)	47-63
Rated Power (W)	1050
Type	ATX12V
Cooling	135mm Hydraulic Dynamic Bearing Fan (DWPH EFF-14E12H)
Semi-Passive Operation	✓
Cable Design	Fully Modular

TEST EQUIPMENT	
Electronic Loads	Chroma 63601-5 x4 Chroma 63600-2 x2 63640-80-80 x20 63610-80-20 x2
AC Sources	Chroma 6530, Keysight AC6804B
Power Analyzers	N4L PPA1530 x2
Sound Analyzer	Briel & Kjaer 2270 G4
Microphone	Briel & Kjaer Type 4955-A
Data Loggers	Picoscope TC-08 x2, Labjack U3-HV x2
Tachometer	UNI-T UT372 x2
Digital Multimeter	Keysight U1273AX, Fluke 289, Keithley 2015 - THD
UPS	CyberPower OLS3000E 3kVA x2
Transformer	3kVA x2

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 1/16

Anex

Cougar Polar 1050W

RESULTS

Temperature Range (°C /°F)	30-32 / 86-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓
ALPM (Alternative Low Power Mode) compatible	✓

115V

Average Efficiency	90.351%
Efficiency With 10W (≤500W) or 2% (>500W)	69.526
Average Efficiency 5VSB	81.306%
Standby Power Consumption (W)	0.0502268
Average PF	0.979
Avg Noise Output	17.26 dB(A)
Efficiency Rating (ETA)	PLATINUM
Noise Rating (LAMBDA)	A+

230V

Average Efficiency	92.548%
Average Efficiency 5VSB	80.482%
Standby Power Consumption (W)	0.0817711
Average PF	0.947
Avg Noise Output	17.49 dB(A)
Efficiency Rating (ETA)	PLATINUM
Noise Rating (LAMBDA)	A+

POWER SPECIFICATIONS

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	20	20	87.5	3	0.3
	Watts	100		1050	15	3.6
Total Max. Power (W)		1050				

HOLD-UP TIME & POWER OK SIGNAL (230V)

Hold-Up Time (ms)	21.1
AC Loss to PWR_OK Hold Up Time (ms)	18
PWR_OK Inactive to DC Loss Delay (ms)	3.1

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 2/16

CABLES AND CONNECTORS

Modular Cables

Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors
ATX connector 20+4 pin (650mm)	1	1	18-22AWG	No
4+4 pin EPS12V (650mm)	1	1	16AWG	No
8 pin EPS12V (650mm)	1	1	16AWG	No
6+2 pin PCIe (650mm)	7	7	16AWG	No
6+2 pin PCIe (650mm+100mm)	1	2	16AWG	No
SATA (500mm+115mm+115mm+115mm)	3	12	18AWG	No
4 pin Molex (500mm+120mm+120mm+120mm)	1	4	18AWG	No
AC Power Cord (1400mm) - C13 coupler	1	1	14AWG	-

All data and graphs included in this test report can be used by any individual on the following conditions:


- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 3/16

EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

Efficiency: Cougar Polar 1050W

Ambient: 37°C - 47°C (98.6°F - 116.6°F)

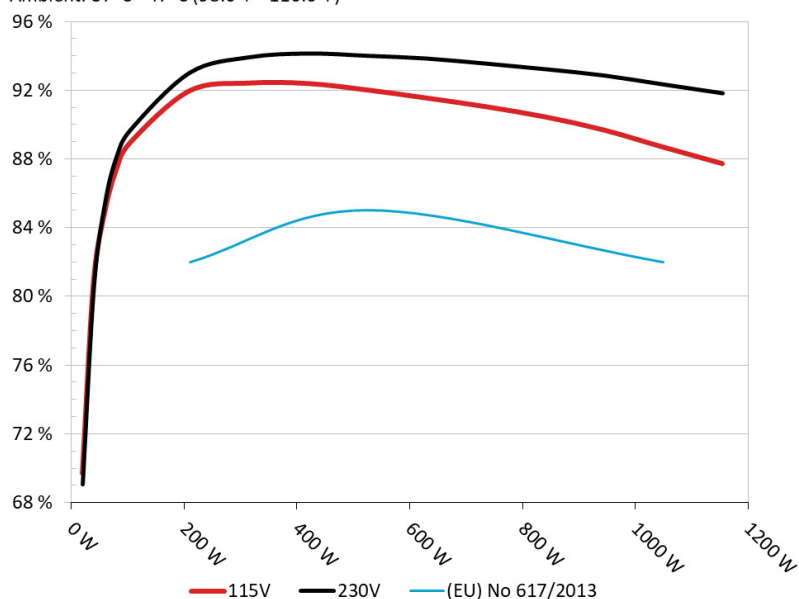


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB EFFICIENCY

5VSB Efficiency: Cougar Polar 1050W

Ambient: 34°C - 36°C (93.2°F - 96.8°F)

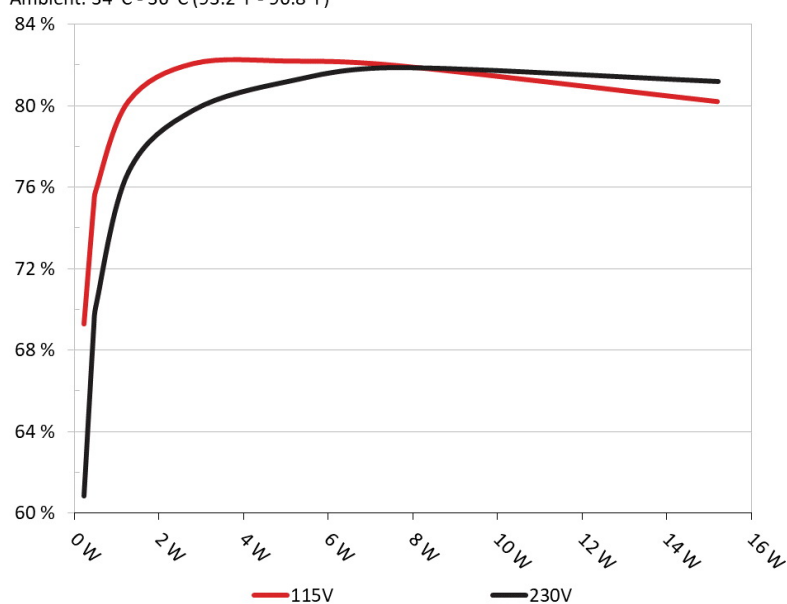

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

Anex

Cougar Polar 1050W

5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.231W	69.286%	0.05
	5.129V	0.333W		115.12V
2	0.09A	0.461W	75.128%	0.09
	5.129V	0.614W		115.12V
3	0.55A	2.815W	82.086%	0.321
	5.119V	3.429W		115.12V
4	1A	5.11W	82.207%	0.399
	5.111V	6.216W		115.12V
5	1.5A	7.651W	81.984%	0.442
	5.101V	9.332W		115.12V
6	2.999A	15.205W	80.218%	0.498
	5.071V	18.954W		115.12V

5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.231W	60.826%	0.018
	5.13V	0.38W		230.23V
2	0.09A	0.461W	69.115%	0.031
	5.129V	0.667W		230.22V
3	0.55A	2.815W	79.797%	0.148
	5.12V	3.528W		230.23V
4	1A	5.11W	81.235%	0.229
	5.112V	6.29W		230.23V
5	1.5A	7.651W	81.89%	0.287
	5.102V	9.343W		230.23V
6	2.999A	15.209W	81.21%	0.376
	5.072V	18.728W		230.23V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 5/16

Anex

Cougar Polar 1050W


115V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 6/16


EFFICIENCY GRAPH 115V

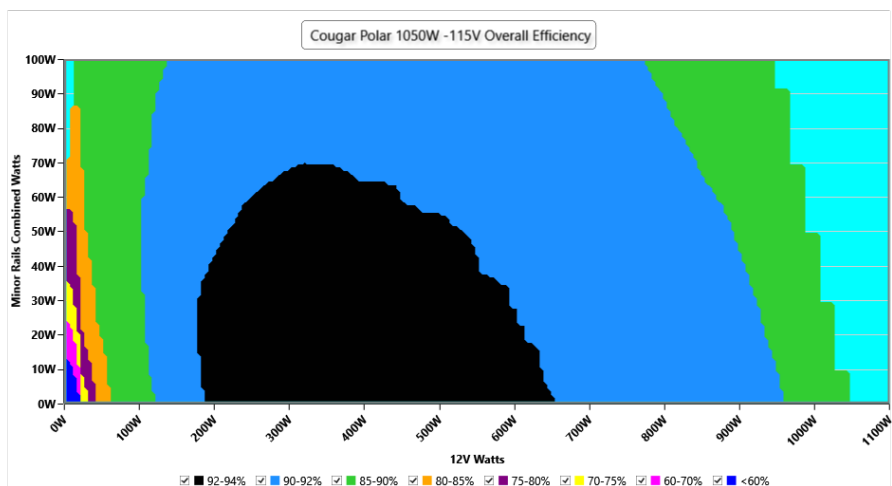

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 115V

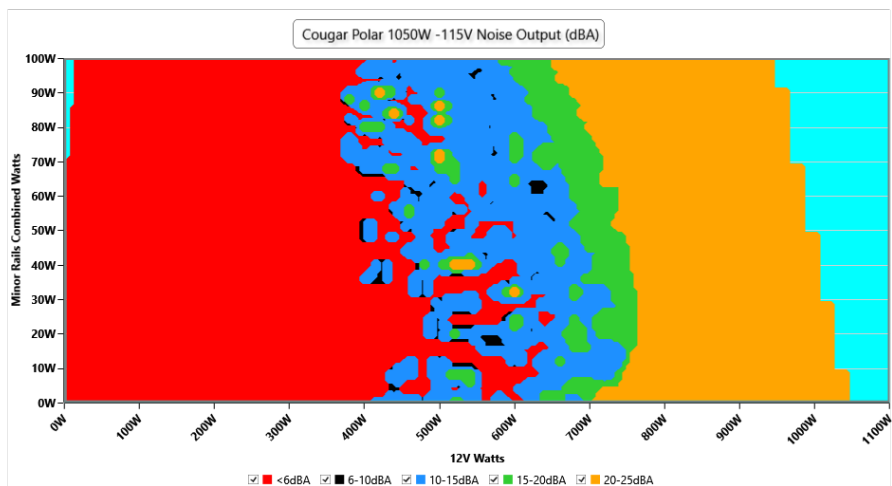

INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Cougar Polar 1050W

VAMPIRE POWER -115V

Power - 12BB02PR10500001 - 11/04/2022 - 15:02

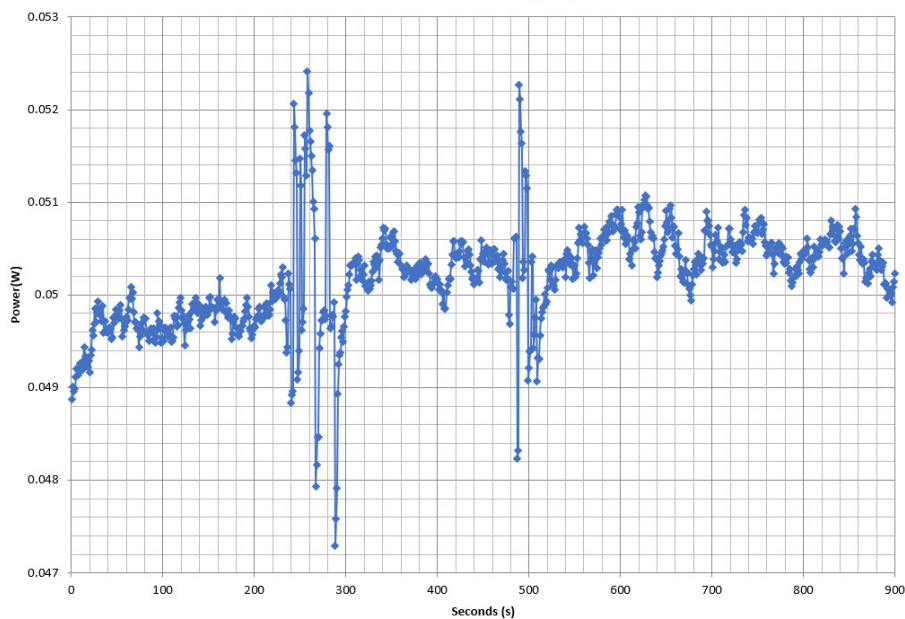

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 8/16

Anex

Cougar Polar 1050W

10-110% LOAD TESTS 115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	6.826A	1.991A	1.985A	0.98A	104.929	88.976%	0	<6.0	44.95°C	0.977
	12.210V	5.022V	3.323V	5.102V	117.929				40.57°C	115.14V
20%	14.666A	2.989A	2.979A	1.178A	209.912	91.984%	0	<6.0	45.64°C	0.984
	12.206V	5.019V	3.322V	5.092V	228.205				40.73°C	115.14V
30%	22.851A	3.489A	3.477A	1.377A	314.91	92.437%	0	<6.0	46.42°C	0.98
	12.203V	5.016V	3.321V	5.083V	340.673				41.17°C	115.14V
40%	30.991A	3.991A	3.976A	1.577A	419.379	92.411%	0	<6.0	47.53°C	0.977
	12.203V	5.012V	3.319V	5.074V	453.82				41.79°C	115.14V
50%	38.860A	4.988A	4.971A	1.777A	524.733	92.036%	489	14.0	42.92°C	0.978
	12.204V	5.012V	3.319V	5.065V	570.138				49.11°C	115.14V
60%	46.681A	5.988A	5.966A	1.978A	629.235	91.568%	716	22.8	43.15°C	0.98
	12.198V	5.011V	3.319V	5.055V	687.181				50.24°C	115.13V
70%	54.571A	6.99A	6.962A	2.179A	734.555	91.065%	722	23.0	43.82°C	0.982
	12.194V	5.008V	3.318V	5.046V	806.628				51.36°C	115.12V
80%	62.459A	7.994A	7.956A	2.281A	839.365	90.472%	729	23.1	44.21°C	0.985
	12.192V	5.005V	3.316V	5.039V	927.765				52.61°C	115.12V
90%	70.734A	8.495A	8.443A	2.384A	944.732	89.697%	913	29.4	44.81°C	0.986
	12.190V	5.001V	3.315V	5.031V	1053.247				53.91°C	115.11V
100%	78.774A	8.998A	8.959A	2.991A	1049.573	88.702%	1298	39.1	45.33°C	0.987
	12.186V	5V	3.314V	5.014V	1183.259				55.38°C	115.1V
110%	86.698A	10.003A	10.048A	2.994A	1154.183	87.741%	1710	46.7	46.76°C	0.988
	12.179V	4.997V	3.313V	5.009V	1315.446				57.64°C	115.1V
CL1	0.113A	12.024A	11.936A	0A	101.262	84.332%	719	23.0	43.35°C	0.979
	12.222V	5.006V	3.325V	5.111V	120.075				49.93°C	115.16V
CL2	0.112A	20.091A	0A	0A	101.373	82.69%	393	8.8	43.97°C	0.981
	12.223V	4.977V	3.319V	5.115V	122.596				51.33°C	115.16V
CL3	0.112A	0A	19.889A	0A	67.361	76.579%	0	<6.0	53.01°C	0.973
	12.227V	5.001V	3.318V	5.112V	87.97				44.61°C	115.15V
CL4	86.056A	0A	0A	0A	1049.324	89.665%	806	26.0	45.25°C	0.987
	12.193V	5V	3.309V	5.08V	1170.273				55.32°C	115.1V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 9/16

Anex

Cougar Polar 1050W

20-80W LOAD TESTS 115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.214A	0.497A	0.496A	0.195A	19.983	69.693%	0	<6.0	39.75°C	0.882
	12.216V	5.025V	3.328V	5.121V	28.673				36.65°C	115.15V
40W	2.676A	0.697A	0.694A	0.293A	39.985	80.947%	0	<6.0	40.67°C	0.943
	12.214V	5.025V	3.327V	5.119V	49.396				37.29°C	115.15V
60W	4.136A	0.895A	0.893A	0.391A	59.985	84.964%	0	<6.0	42.66°C	0.958
	12.212V	5.024V	3.325V	5.116V	70.601				38.89°C	115.15V
80W	5.593A	1.094A	1.092A	0.489A	79.923	87.381%	0	<6.0	44.48°C	0.974
	12.212V	5.024V	3.324V	5.113V	91.465				40.45°C	115.14V

RIPPLE MEASUREMENTS 115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	14.51mV	4.47mV	7.68mV	7.19mV	Pass
20% Load	16.99mV	5.34mV	8.09mV	7.09mV	Pass
30% Load	16.58mV	5.23mV	8.19mV	7.34mV	Pass
40% Load	16.03mV	5.89mV	8.90mV	7.44mV	Pass
50% Load	15.42mV	6.20mV	9.60mV	7.29mV	Pass
60% Load	14.46mV	6.81mV	10.61mV	7.99mV	Pass
70% Load	16.30mV	7.47mV	10.67mV	8.25mV	Pass
80% Load	17.47mV	8.33mV	13.14mV	9.06mV	Pass
90% Load	18.53mV	10.17mV	13.65mV	9.16mV	Pass
100% Load	30.32mV	11.48mV	16.47mV	10.86mV	Pass
110% Load	32.47mV	12.28mV	16.62mV	10.56mV	Pass
Crossload1	19.82mV	11.40mV	14.44mV	9.55mV	Pass
Crossload2	14.30mV	15.65mV	11.33mV	9.46mV	Pass
Crossload3	12.18mV	6.10mV	15.98mV	9.31mV	Pass
Crossload4	29.64mV	7.41mV	11.11mV	12.34mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 10/16

Anex

Cougar Polar 1050W


230V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 11/16


EFFICIENCY GRAPH 230V

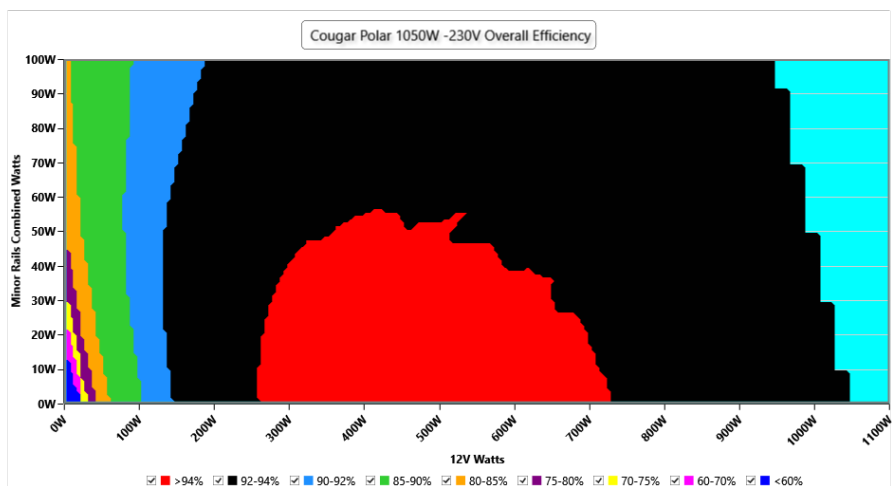

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 230V

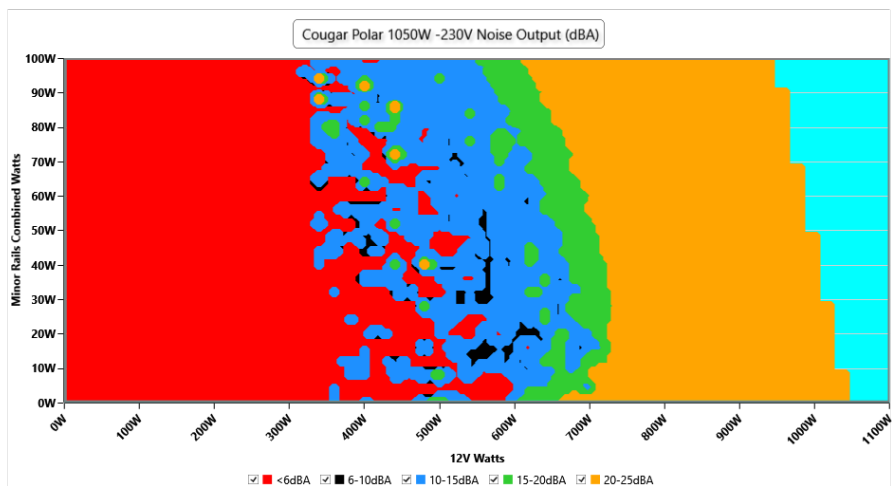

INFO


The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -230V

Power - 12BB02PR10500001 - 11/04/2022 - 15:02

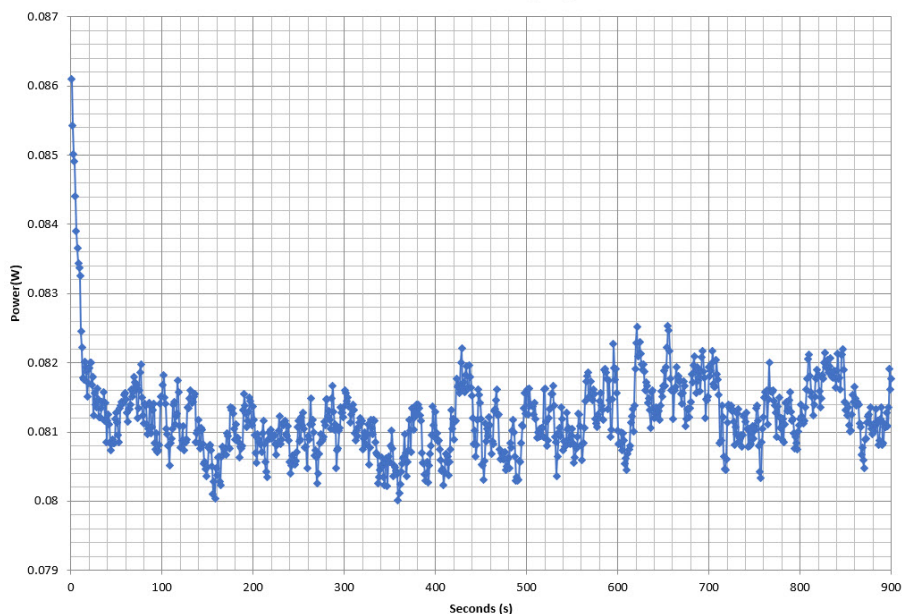

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 13/16

Anex

Cougar Polar 1050W

10-110% LOAD TESTS 230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	6.826A	1.991A	1.986A	0.98A	104.918	89.716%	0	<6.0	44.17°C	0.869
	12.209V	5.022V	3.323V	5.103V	116.944				39.63°C	230.25V
20%	14.665A	2.989A	2.98A	1.178A	209.895	93.041%	0	<6.0	45.61°C	0.933
	12.206V	5.018V	3.322V	5.094V	225.595				40.56°C	230.25V
30%	22.849A	3.489A	3.478A	1.376A	314.887	93.939%	0	<6.0	46.92°C	0.953
	12.203V	5.015V	3.321V	5.085V	335.204				41.24°C	230.26V
40%	30.992A	3.99A	3.976A	1.576A	419.327	94.157%	0	<6.0	47.62°C	0.958
	12.201V	5.012V	3.319V	5.076V	445.35				41.6°C	230.25V
50%	38.861A	4.988A	4.971A	1.777A	524.722	94.025%	509	14.9	42.33°C	0.963
	12.203V	5.012V	3.319V	5.065V	558.069				48.82°C	230.27V
60%	46.683A	5.988A	5.967A	1.977A	629.21	93.866%	699	22.0	42.41°C	0.965
	12.197V	5.01V	3.318V	5.057V	670.327				49.51°C	230.27V
70%	54.566A	6.993A	6.964A	2.178A	734.465	93.57%	720	23.0	42.88°C	0.968
	12.194V	5.005V	3.317V	5.047V	784.934				50.93°C	230.26V
80%	62.463A	7.995A	7.957A	2.281A	839.303	93.245%	728	23.1	44.2°C	0.969
	12.190V	5.004V	3.316V	5.04V	900.108				52.81°C	230.26V
90%	70.736A	8.498A	8.445A	2.383A	944.681	92.872%	868	28.2	44.53°C	0.971
	12.190V	4.999V	3.314V	5.032V	1017.191				53.61°C	230.26V
100%	78.772A	9.002A	8.961A	2.99A	1049.56	92.354%	1389	40.7	45.39°C	0.973
	12.186V	4.998V	3.313V	5.014V	1136.451				55.54°C	230.27V
110%	86.691A	10.009A	10.051A	2.993A	1154.17	91.84%	1711	46.6	47.15°C	0.974
	12.180V	4.994V	3.312V	5.009V	1256.712				58.02°C	230.26V
CL1	0.113A	12.029A	11.939A	0A	101.259	84.972%	720	23.0	42.19°C	0.875
	12.223V	5.004V	3.324V	5.112V	119.169				48.59°C	230.28V
CL2	0.112A	20.124A	0A	0A	101.373	82.969%	0	<6.0	50.87°C	0.877
	12.224V	4.969V	3.316V	5.116V	122.184				43.31°C	230.28V
CL3	0.112A	0A	19.881A	0A	67.359	77.345%	0	<6.0	52.94°C	0.829
	12.226V	5.004V	3.319V	5.112V	87.09				44.79°C	230.28V
CL4	86.050A	0A	0A	0A	1049.315	93.014%	1108	34.7	45.79°C	0.972
	12.194V	4.997V	3.308V	5.08V	1128.127				55.84°C	230.26V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 14/16

Anex

Cougar Polar 1050W

20-80W LOAD TESTS 230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.215A	0.497A	0.496A	0.195A	19.981	69.048%	0	<6.0	40.27°C	0.579
	12.209V	5.027V	3.329V	5.123V	28.938				37.17°C	230.24V
40W	2.676A	0.696A	0.694A	0.293A	39.983	80.618%	0	<6.0	40.99°C	0.714
	12.209V	5.026V	3.327V	5.12V	49.596				37.77°C	230.25V
60W	4.138A	0.895A	0.893A	0.391A	59.982	85.518%	0	<6.0	42.39°C	0.783
	12.208V	5.025V	3.325V	5.117V	70.14				38.84°C	230.25V
80W	5.594A	1.094A	1.092A	0.489A	79.913	88.127%	0	<6.0	42.76°C	0.831
	12.209V	5.024V	3.324V	5.114V	90.679				39.08°C	230.25V

RIPPLE MEASUREMENTS 230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	16.58mV	4.68mV	7.13mV	7.18mV	Pass
20% Load	18.51mV	4.93mV	8.04mV	6.63mV	Pass
30% Load	16.03mV	5.29mV	8.65mV	7.39mV	Pass
40% Load	17.55mV	5.74mV	8.80mV	7.54mV	Pass
50% Load	16.23mV	6.66mV	9.45mV	7.74mV	Pass
60% Load	15.64mV	7.07mV	9.86mV	8.25mV	Pass
70% Load	15.90mV	7.93mV	11.02mV	8.55mV	Pass
80% Load	17.11mV	8.28mV	12.99mV	9.01mV	Pass
90% Load	18.28mV	10.67mV	14.21mV	9.06mV	Pass
100% Load	31.54mV	12.01mV	15.86mV	9.87mV	Pass
110% Load	32.94mV	12.52mV	16.97mV	10.63mV	Pass
Crossload1	20.08mV	11.28mV	14.38mV	9.52mV	Pass
Crossload2	16.23mV	15.14mV	11.07mV	9.05mV	Pass
Crossload3	13.35mV	6.10mV	16.83mV	10.12mV	Pass
Crossload4	30.98mV	6.95mV	10.91mV	12.02mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 15/16

Anex

Cougar Polar 1050W



Top side

MODEL NO. 型號 / 型号	CGR PR-1050				
AC INPUT 交流輸入 / 交流輸入	100-240V~ 47-63Hz 15-7A				
DC OUTPUT 直流輸出 / 直流輸出	+3.3V	+5V	+12V	-12V	+5Vsb
MAX. A 最大電流 / 最大電流	20A	20A	87.5A	0.3A	3A
COMBINED 最大瓦特數 / 最大瓦特數	100W	1050W	3.6W	15W	
TOTAL MAX. OUTPUT POWER 總功率 / 總功率	1050W				

CE	FC	EAC	RoHS	CCC	RoHS
----	----	-----	------	-----	------

中国大陆使用: AC 220V~ 50Hz 7A
 WARNING: Hazardous voltages contained within this power supply, not user serviceable. Return to service center for repair.
 警告: 內有高压, 請勿開機 / 警告: 內有高压, 請勿开启
 此電源供應器之電源輸出非屬電力限制電源, 請連結使用具防火外殼 (V-1以上) 之透過, 以避免火災發生
 此電源供應器之電源輸出非屬電力限制電源, 請連結使用具防火外殼 (V-1以上) 之周边, 以避免火災發生

製造商: 偉訓科技股份有限公司
 製造商: 偉訓科技股份有限公司
 CompuCase Enterprise
 交換式電源供應器
 开关电源供應器
 Switching Power Supply

Power specifications label

CERTIFICATIONS 115V



CERTIFICATIONS 230V



All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case