HERRMANS

H-TRACE BATTERY



Not all products are available in all markets. During continuous improvement specifications and design are changing. All values are nominal values. Illustrations do not necessarily show the design of every version and some features are version specific.

TECHNICAL DATA

Power Source	**Battery (2x AA)**
Nominal Voltage DC	**3 V**
Power Consumption	**0.1 W**
Number of LED's	**2**
Battery Run-time	**100h (DE & FR) / 80h (DK)**
Operating modes	**On/Off**
Mounting Options	**Carrier**


Mounting Distance	**50 mm**
Housing	**Plastic**
Salt Spray Test	**ISO 9227 NSS 240H**
Type approval (light)	**Germany (StVZP), France (TP RPBi), Danish req.**
Type approval (reflector)	**Z, E IA**
Packaging Amount	**144 Pce**

KEY FEATURES

- Batteries included, Low battery indicator
- Instantly noticeable with dual lightsources
- 220° side visibility for increased safety

Herrmans OY AB.
P.O. Box 36, Bennäsvägen 143
FI-68601 Jakobstad, FINLAND
Tel. +358 6 781 5100
Fax +358 6 723 3110
www.herrmans.eu

DRAWINGS

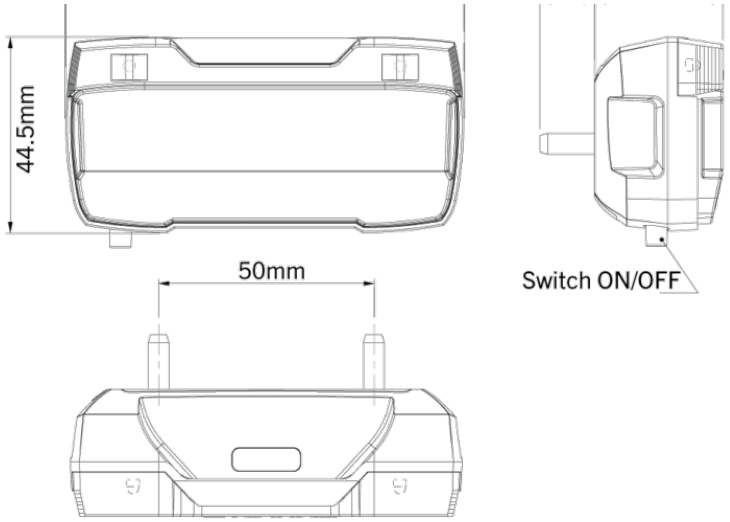

Herrmans OY AB.
P.O. Box 36, Bennäsvägen 143
FI-68601 Jakobstad, FINLAND
Tel. +358 6 781 5100
Fax +358 6 723 3110
www.herrmans.eu

ASSEMBLY OPTIONS



Integrated screws 50mm



Snap-in railsbracket 50mm

Herrmans OY AB.
P.O. Box 36, Bennäsvägen 143
FI-68601 Jakobstad, FINLAND
Tel. +358 6 781 5100
Fax +358 6 723 3110
www.herrmans.eu