

# ASUS BE24ECSBT

## Touch Monitor












Height Adjustment  
(0 to 130mm)

Pivot(+90° to -90°)

Swivel(+180° to -180°)

## Key Features

- |  |   |   |   |  |  |
|--|---|---|---|--|--|
| <br>10-point Touch   | Capacitive 10-point touchscreen offers accurate and responsive touch experiences        | <br>IPS<br>Ultra-wide Viewing Angles | 178° wide-viewing-angle IPS panel (Full HD) exudes consistent color at almost any viewing angle | <br>USB Type-C     | Support signal transmission of DisplayPort, data transmission and up to 80W power delivery via just one USB-C cable. |
| <br>HDMI™<br>HIGH DEFINITION MULTIMEDIA INTERFACE<br>DisplayPort | Extensive connectivity of USB-C, HDMI, DP in, DP out for daisy chain, and Earphone jack | <br>Daisy-chain                      | DisplayPort allows users to daisy chain for a multi-display setup from one video source.        | <br>USB Hub        | Embedded three USB3.2 Gen 1 type A ports for connecting mouse, keyboard, or other USB devices                        |
| <br>Auto-brightness Adjustment                                   | Built-in ambient light sensor to detect the light conditions around automatically.      | <br>4-way Ergonomic Stand            | Ergonomically-designed stand with tilt, swivel (+180° ~ -180°), pivot, and height adjustments   | <br>Wall Mountable | Space saving from compatible VESA mount standard (100 x 100 mm)  |



(By country)





# Specification

Display	Panel Size(diagonal)	23.8"(60.47 cm) Wide Screen (16:9)
	Display Viewing Area(HxV)	527.04 x 296.46mm
	Panel Type	IPS
	Display Surface	non-glare
	Color Saturation	72% NTSC
	True Resolution	1920x1080
	Pixel Pitch	0.2745mm
	Brightness (Max.)	300cd/m <sup>2</sup>
	Contrast Ratio (Max.)	1000:1
	ASUS Smart Contrast Ratio(ASCR)	100,000,000:1
	Viewing Angle (CR <sub>≥10</sub> )	178°(H)/178°(V)
	Display Colors	16.7 million
	Response Time	5ms (GTG)
Video Features	Splendid™ Video Intelligence Tech.	Yes
	Skin-Tone Selection	3 modes
	Color Temperature Selection	4 modes (Cool/Normal/Warm/User)
	HDCP support	Yes (ver. 1.4)
	QuickFit	Yes
	Blue Light Filter	Yes
Audio Features		Stereo Speaker 2W x 2, RMS
Input/ Output		USB-C (DP Alt mode with PD 80W), HDMI, DisplayPort in, DisplayPort output(for daisy-chain), USB3.2 Gen1 Type A x3 ports (downstream), Earphone jack
Power	Power Consumption	<17.7 W* <sup>1</sup>
	Power Saving Mode	<0.5W
	Power Off Mode	0W (hard switch)
	Voltage	100–240V, 50 / 60 Hz
Mechanical Design	Color	Black
	Tilt(angle)	Yes (+35° ~ -5°)
	Swivel(angle)	Yes (+180° ~ -180°)
	Pivot(angle/direction)	Yes (+90° ~ -90°)
	Height Adjustment	Yes (0~130mm)
VESA Wall Mounting	100x100mm	
Security	Kensington lock	Yes
Dimension	Phys. Dimension (WxHxD)	539.7 x (329.4~459.4) x 211.4 mm(withstand), 539.7 x 329.9 x 52.8 mm(without stand)
	Box Dimension (WxHxD)	746.0 x 440.0 x 170.0 mm
Weight		Net Weight with Stand : 6.1 Kg Net Weight without Stand : 4.1 Kg Gross Weight : 8.3 Kg
Accessories		Power cord(1.8m), HDMI cable(1.8m), USB-C cable(1.5m), DisplayPort Cable(optional), USB C to A Cable(optional), Warranty card, Quick Start Guide, MiniPC Kit (optional)
Compliance Standards		FCC, UL/cUL, ICES-3, CB, CE, ErP, WEEE, TUV-GS, TUV-Ergo, ISO 9241-307, CU, CCC, CEL, CECP, BSMI, AU MEPS, VCCI, PSE, J-MOSS, KC, KCC, e-Standby, Energy Star, TCO, RoHS, CEC, WHQL Windows 10/11, EPEAT Silver, TUV Flicker free, TUV Low Blue Light

\*1.Measuring a screen brightness of 200 nits without audio/ USB/ Card reader connection

\*All specifications are subject to change without notice.

# Outline Dimension

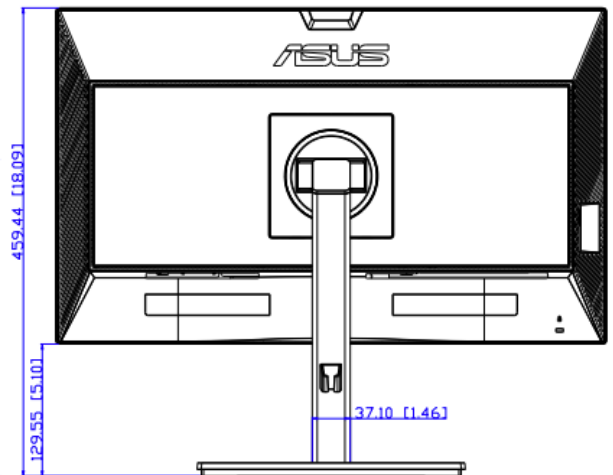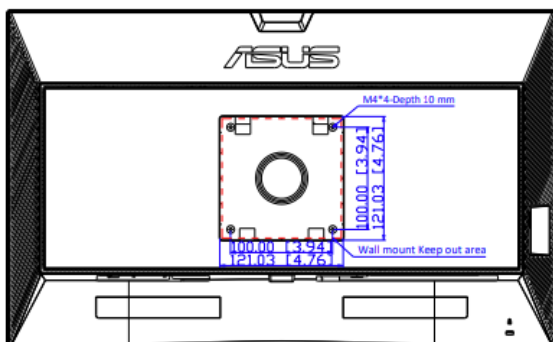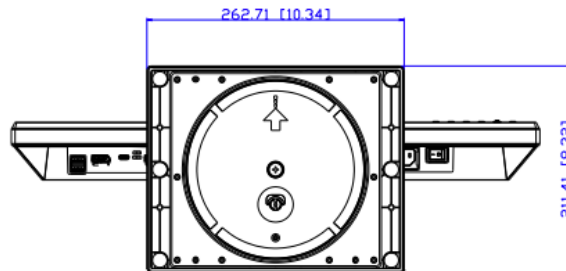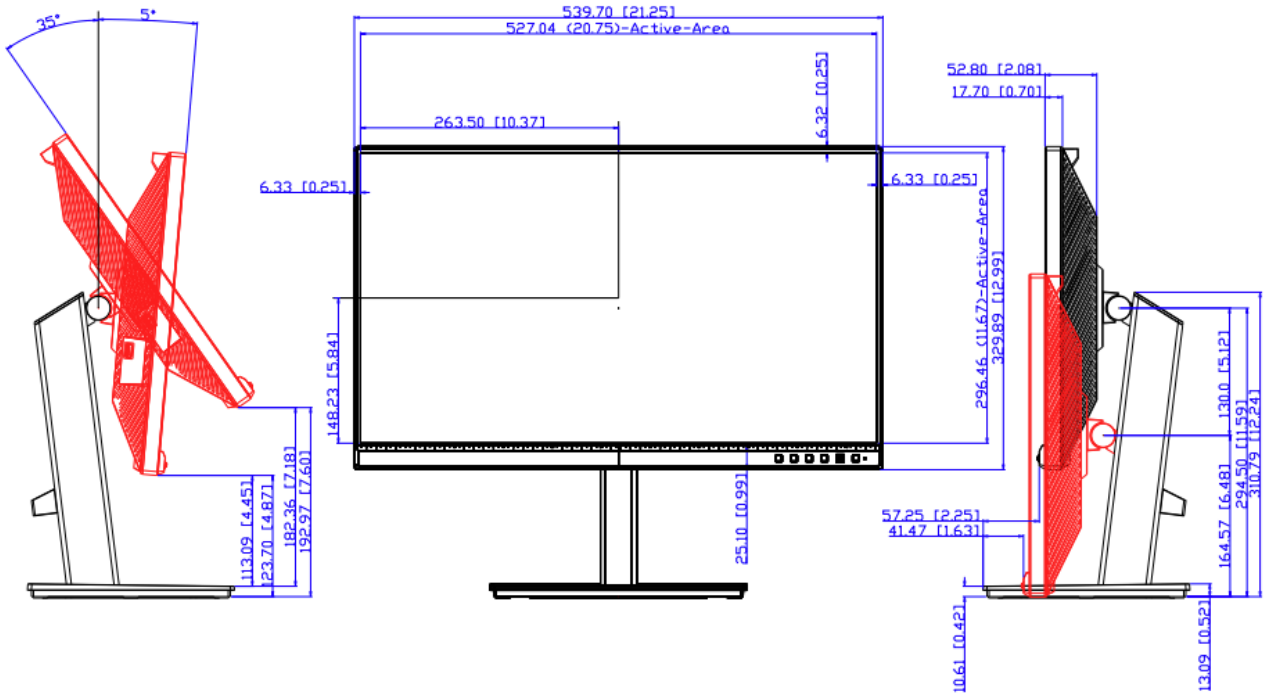

\*Unit: mm(inch)