



RVC-125 Manual

November-2024



FR

Cet appareil et
ses cordons sont
recyclables

À DÉPOSER
EN MAGASIN



OU

À DÉPOSER
EN DÉCHÈTERIE



Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

SAFETY

Safety instruction

Please read the safety instructions carefully before using the product for the first time and keep the instructions for future reference.


- 1.Keep the product out of the reach of children and pets to avoid chewing and swallowing.
- 2.Warning: This product includes lithium-ION battery
- 3.Never open the product. Only qualified personnel can disassemble this product. Users are not recommended to make service or repairs
- 4.Only charge with supplied charger. Do not use non original accessories together with the product this can make the product functionality abnormal
- 5.Do not touch wires sockets or body parts when the product is in cleaning mode
- 6.Do not sit on the product
- 7.Before using this product, please remove all vulnerable items such as lamps, glass items, curtains and other obstacles that may entangle the brushes or air suction passage.
- 8.Do not bend wires or place heavy objects on the machine
- 9.This product is a household product. The use of the product is intended for indoor and dry conditions. Do not use it outdoors.
- 10.Do not use this product in wet environments such as the bathroom
- 11.To prevent accidents please inform others in the household when the products is cleaning
- 12.Please empty the dust box before using. A full dust box will affect cleaning efficiency and lower the suction ability
- 13.Product operating and storage temperature is from 0 degrees Celsius to 40 degrees Celsius. Environments under and above this temperature might affect functionality
- 14.Do only use the original rechargeable battery and charging seat provided from the supplier. Non-rechargeable batteries are strictly prohibited, please refer to "product parameters" for battery specification.
- 15.Do not use the product in environments with open flames or fragile products
- 16.It's forbidden to use the products in extremely hot (above 40 degrees) or extremely cold (below 0 degrees) temperatures. The warranty do not cover damage caused by this.
- 17.Do not touch the products when turned on and cleaning. Keep hair, clothes, fingers and other body parts away from the opening of the products
- 18.The product is unable to absorb any stone or paper waste as this may clog the product
- 19.The product can't absorb any burning articles such as cigarettes, matches, ashes and etc. which may cause fire
- 20.Make sure to keep the product away from any inflammable substances such as printer and photocopy toner and other burning liquids
- 21.Do not place articles in the suction opening. Do not use the product when the suction port is blocked. Clean up dust, cotton wool hair etc. at the suction opening to ensure smooth air circulation at the opening
- 22.Use power cord carefully to avoid damage. Do not pull, drag or use the power cord as handle when moving the charging seat.
- 23.Do not position the power cord in door openings or other places where it can cause damage. Ensure that there is free space around the power cord and charging seat.
- 24.Do not use damaged charging seat or power cord
- 25.The power station adaptor is used as disconnect device, the disconnect device shall remain readily operable. So, make sure there is space around the power outlet for easy access.

IN THE BOX





1: Charging Dock
2: Auto Vac Juno

3: Charging Adapter
4: Side brush

5: HEPA Filter (installed)
6: Cleaning Tool

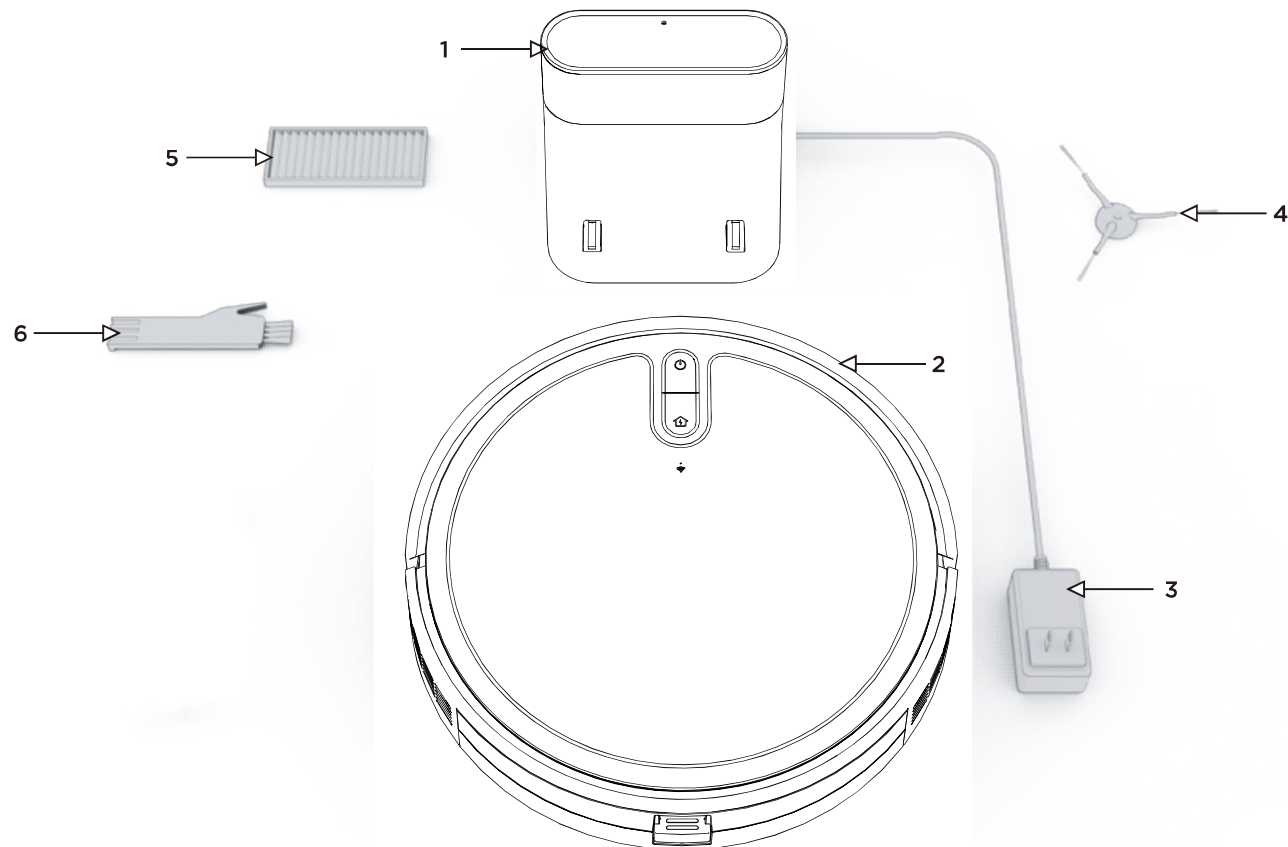

PRODUCT OVERVIEW

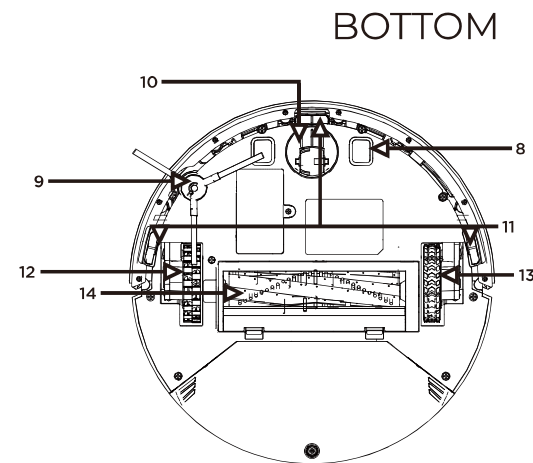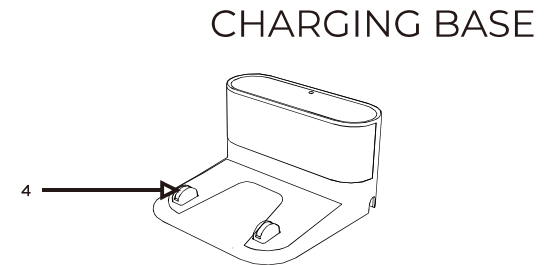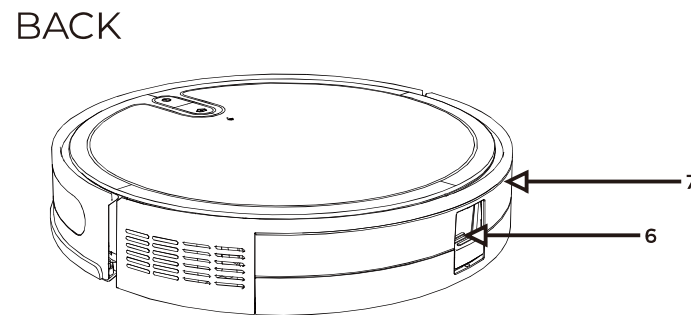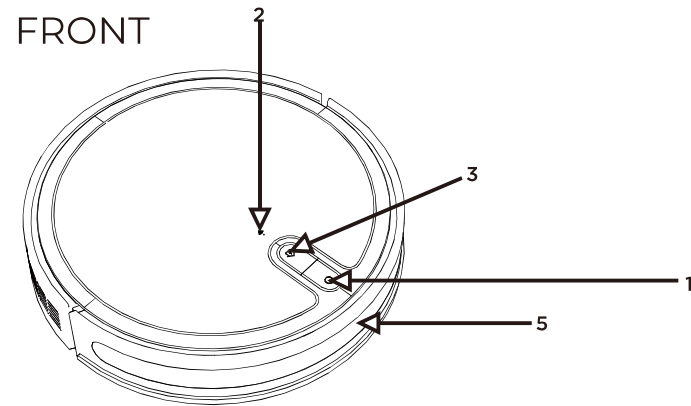

- 1: Power Button
- 2: WiFi Indicator
- 3: Home Button
- 4: Charging Contacts

- 5: Collision Sensor
- 6: Dustbin Release Latch
- 7: Dustbin
- 8: Charging Contacts



- 9: Side Brush
- 10: Omnidirectional Wheel
- 11: Detection Sensors
- 12: Left Wheel

- 13: Right Wheel
- 14: Main Brush



DUSTBIN OVERVIEW

1. Bin/Filter Release Latch

2. HEPA Filter

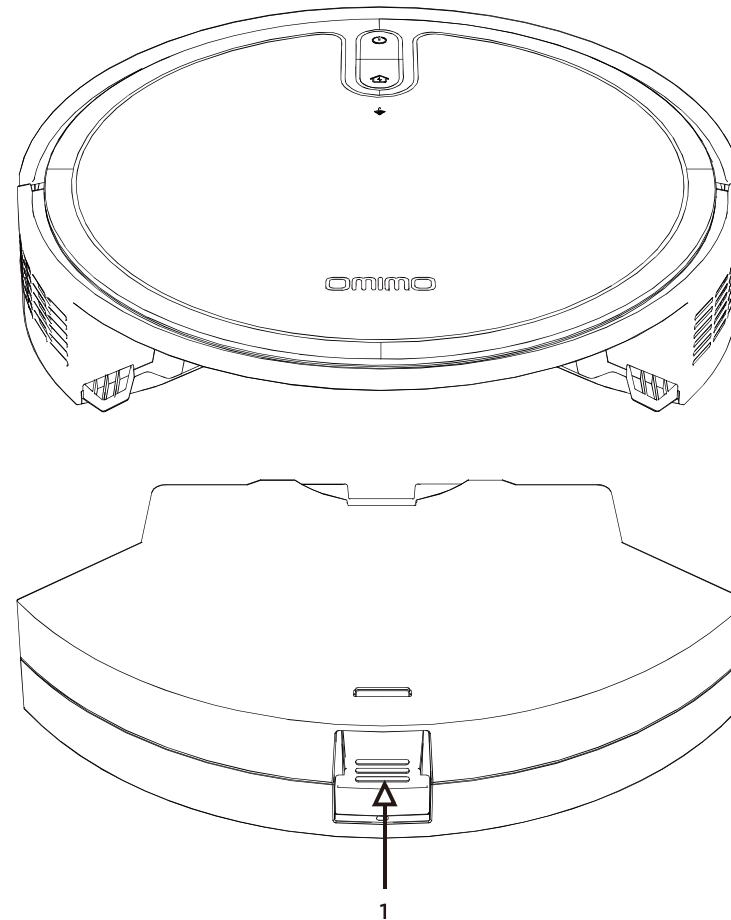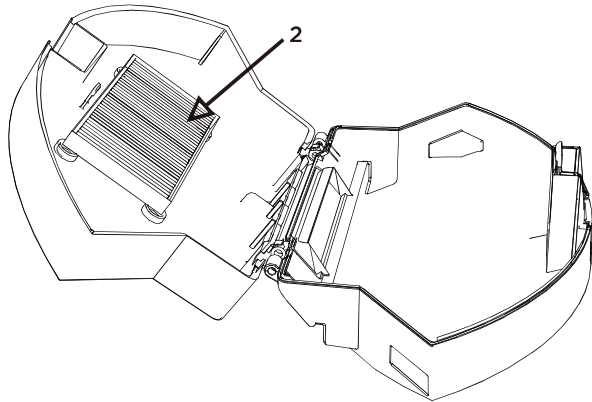

ROBOT INDICATORS

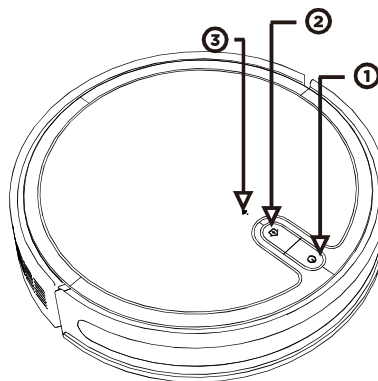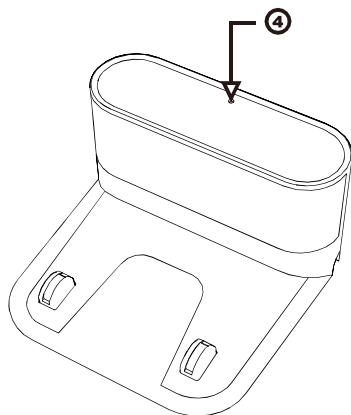

1. POWER BUTTON

- Hold to turn on/off
- Press to start/pause cleaning

2. HOME BUTTON

- Press to return to charging dock for recharging
- Press and hold to initiate Wi-Fi Setup

3. WIFI INDICATOR

4. CHARGING INDICATOR

POWER/HOME LED STATES

- Blinking Blue: Standby Mode
- Solid Blue (OFF Charge Base): Cleaning
- Solid Green (ON Charge Base): Fully Charged
- Breathing Green: Charging
- Fast Blink Red: Error
- Lights off: Off/sleeping

WIFI INDICATOR STATES


- Blinking White: Network configuration Mode
- Solid White: Wi-Fi connected
- Light Off: Wi-Fi disconnected / Network configuration failure

CHARGING INDICATOR LED STATES

- Will remain lit Green when connected to power

SETTING UP THE CHARGING DOCK

ABOUT YOUR CHARGING DOCK

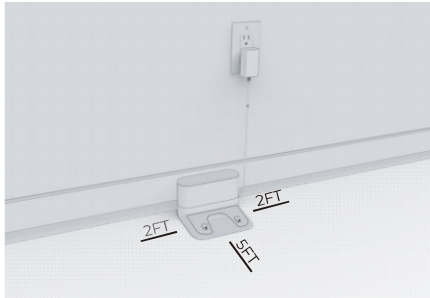


Place the charging dock against the wall and make sure the place is an open & uncluttered area. Leaving at least 5 feet in front of the charging dock and 2 feet on both sides of the charging dock


NOTE: Clearance around the charging base is necessary to prevent obstructions when the Vacuum returns to charge. Avoid using a power source that may inadvertently be switched off (e.g. power strip, outlet controlled by a light switch, GFCI)

SETTING UP THE CHARGING DOCK

- ① Plug the power adapter into the port on the bottom of the charging dock and secure the cable into the channel.

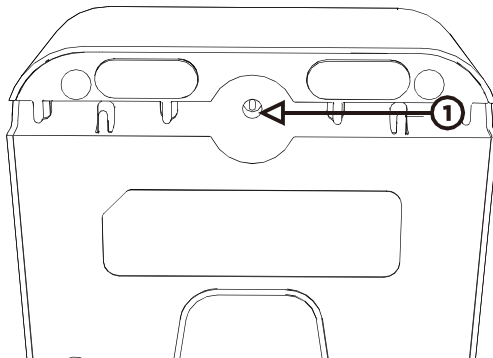


- ② Choose a location on a hard floor surface near a power outlet. Place the charging dock against the wall as shown. Plug the power adapter into a functioning wall outlet.

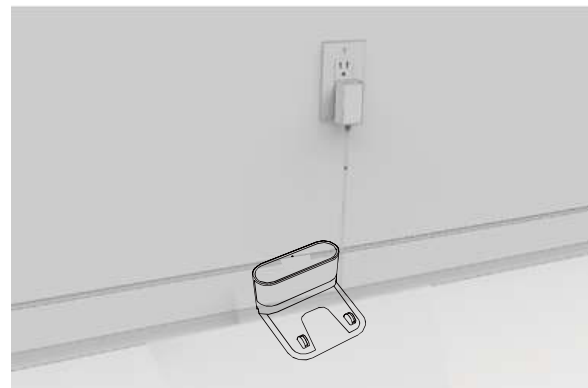

SETTING UP THE AUTOVAC JUNO


STEP 1

Install the side brush by pushing firmly down until it clicks into place



STEP 2


Position the Vacuum on the floor near your charge dock as shown. To turn on Press and Hold the Power button until the indicator turns blue.

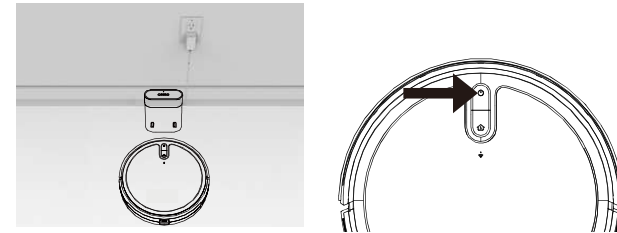

NOTE: Allow your Vacuum to fully charge (up to 5 hours) before first use. The indicators on your robot will turn solid green when fully charged

STEP 3

Now press the  button. The Power and Home icons will slowly fade on off while charging and turn solid green when fully charged.

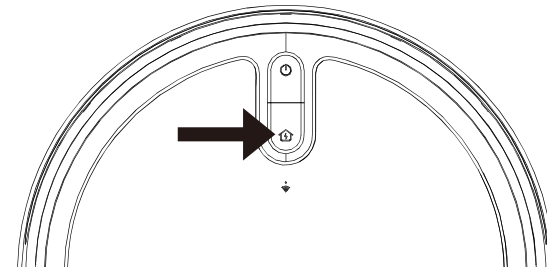

Download TUYA Smart App

Download the Tuya Smart app for your iOS or Android device. Create your account and follow the steps on how to connect.



NOTE: Connecting your Vacuum to Wi-fi is not required but highly recommended. Using the Tuya Smart app, you can follow the steps to connect your Vacuum to Wi-Fi. The app will let you manage your Vacuum from anywhere, set cleaning schedules, view cleaning history, access support and mor

The Tuya Smart app provides an easy step by step guide to get your Vacuum connected to Wi-Fi. Here is a checklist of what you'll need before getting started:

- An iPhone (iOS 10 or later) OR Android (4.4 or later).
- Make sure that your phone is connected to your desired Wi-Fi Network. This will be the network that your RVC-125 Robot connects to.
- Your Wi-Fi network must be a 2.4Ghz network (5Ghz networks are not supported).
- Download and launch the Tuya Smart app from the app store. Create a user account.
- Follow the steps in the app to add the Vacuum.

MAIN BRUSH MAINTENANCE


⚠ CAUTION:

- Power off the vacuum before performing maintenance

Your Vacuum is designed to be used regularly. As with most floor care devices, regular use may cause build-up around brushes, in debris compartments and near filters. We recommend performing regular maintenance, as outlined in the following pages, to keep your RVC-125 Robot running at optimal performance.

- 1: Pinch the left and right tabs on the main brush cover. Lift and remove the cover.
- 2: Remove the main brush and clean.
- 3: Replace the main brush and snap the cover back into place

NOTE: It is recommended to replace the main brush every 6-12 months depending on use

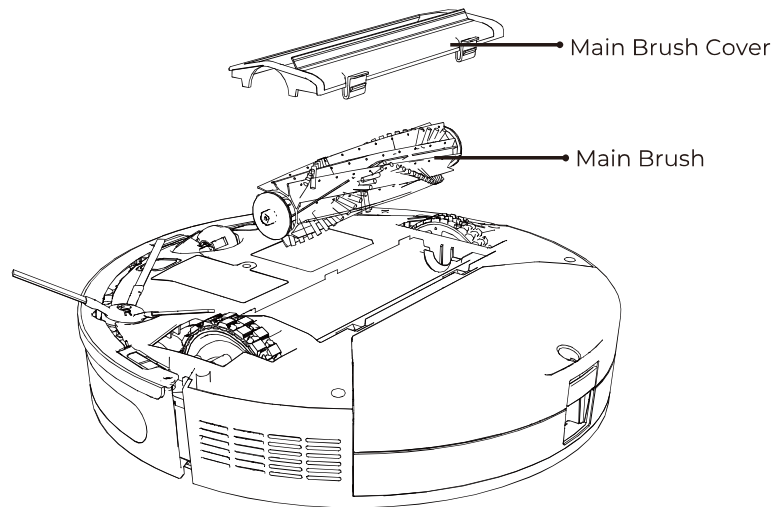


MAINTENANC SCHEDULE


PART	CARE FREQUENCY	REPLACEMENT FREQUENCY
Main Brush	Once a month	Replace every 6-12 months
Side Brush	Once a month	Replace every 6-12 months
HEPA Filter	Every 2 Weeks	Replace every 3 months

MAINTAINING THE DUSTBIN AND FILTERS



1. Press the dustbin release button and remove the dustbin.

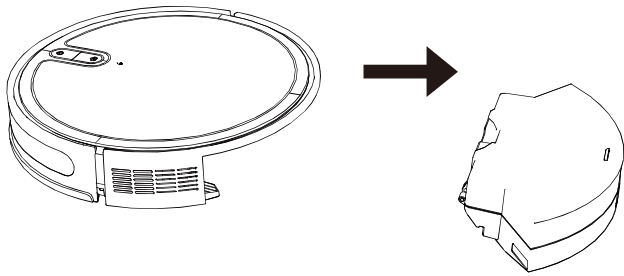

2. Empty the dustbin contents into the trash and wipe the inside thoroughly with a dry cloth.


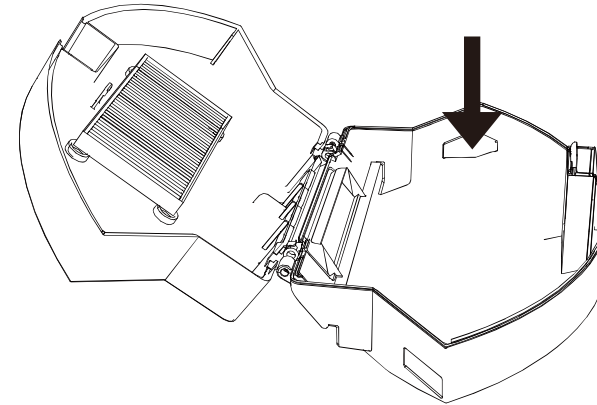


3. Remove the sponge filter and HEPA filter. Tap the HEPA filter to dislodge dust. Rinse the sponge filter and wipe down the filter housing with a dry cloth. Allow sponge filter to dry completely before reassembly.

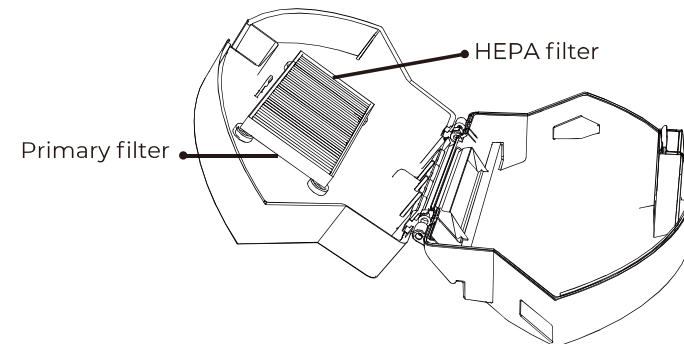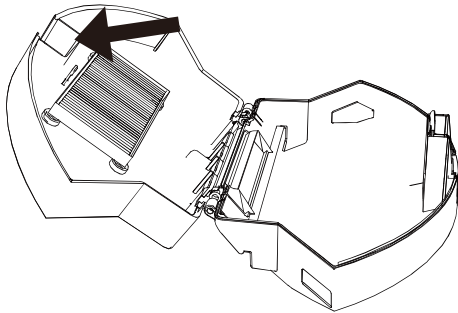

SIDE BRUSH AND SENSOR MAINTENANCE

- 1: Pop off the side brush by pulling it upward
- 2: Remove dirt and debris and reinstall by pushing down in place.
- 3: It is recommended to wipe dust from the charging pins on your robot and charge dock regularly.

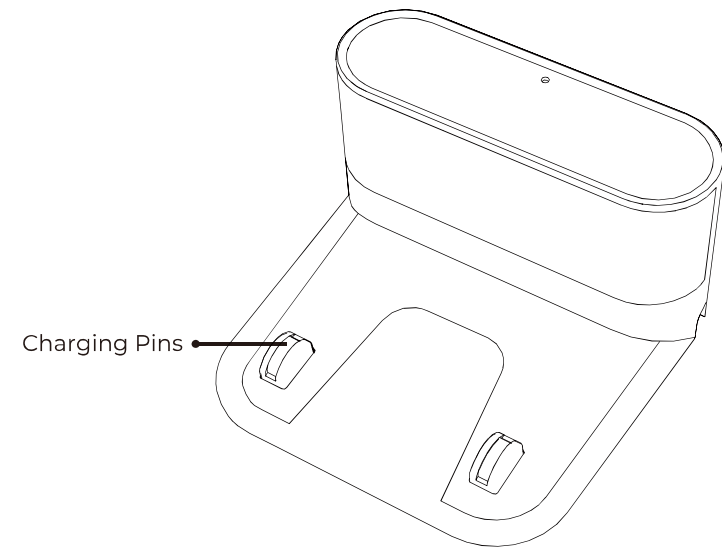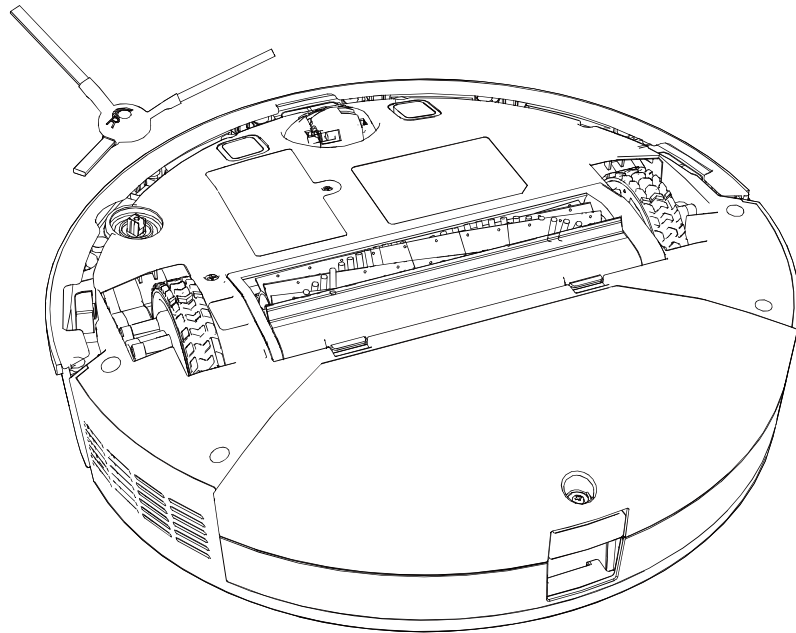

NOTE: It is recommended to replace the side brush every 6-12 months depending on use.

ADAPTER PARAMETERS

Manufacturer's name or trade mark, commercial registration number and address	Manufacturer name: SHENZHEN TIANYIN ELECTRONICS CO.,LTD Commercial Registration number: 4403788337003 Address: Building 13, Floors 1 to 4, Nangang Third Industrial Park, Tangtou Community, Shiyan Street, Bao'an District, Shenzhen, China.
Model identifier	TPQ-236A190060VW01
Input voltage	100-240V
Input AC frequency	50-60Hz
Output voltage	19V
Output current	0.6A
Output power	11.4w
Average active efficiency	82.69% at 100-240V, 50HZ/60HZ
Efficiency at low load (10%)	0.1Amps/uS, 50Hz-10KHz
No-load power consumption	0.1W at 100-240V, 50HZ/60HZ

NOTICE

Please notice - All products are subject to change without any notice. We take reservations for errors and omissions in the manual.

ALL RIGHTS RESERVED, COPYRIGHT DENVER A/S



denver.eu



Electric and electronic equipment and included batteries contains materials, components and substances that can be hazardous to your health and the environment, if the waste material (discarded electric and electronic equipment and batteries) is not handled correctly.

Electric and electronic equipment and batteries is marked with the crossed out trash can symbol, seen above. This symbol signifies that electric and electronic equipment and batteries should not be disposed of with other household waste, but should be disposed of separately.

As the end user it is important that you submit your used batteries to the appropriate and designated facility. In this manner you make sure that the batteries are recycled in accordance with legislature and will not harm the environment.

All cities have established collection points, where electric and electronic equipment and batteries can either be submitted free of charge at recycling stations and other collection sites, or be collected from the households. Additional information is available at the technical department of your city.

Hereby, Denver A/S declares that the radio equipment type RVC-125 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: denver.eu and then click the search ICON on top line of website. Write model number: RVC-125. Now enter product page, and RED directive is found under downloads/other downloads.

Operating Frequency Range: 2.400~2.4835GHz

Max Output Power: 20dBm

DENVER A/S

Omega 5A, Soeften DK-8382

Hinnerup

Denmark

www.facebook.com/denver.eu

Contact

Main contact point: contact.hq@denver.eu

Nordics

Headquarter
Denver A/S
Omega 5A, Soefte
DK-8382 Hinnerup
Denmark

Phone: +45 86 22 61 00
(Push "1" for support)

E-Mail
For technical questions, please write to:
support.hq@denver.eu

For all other questions please write to:
contact.hq@denver.eu

Benelux

DENVER BENELUX B.V.
Barwoutswaarder 13C+D
3449 HE Woerden
The Netherlands

Phone: 0900-3437623
E-Mail: support.nl@denver.eu

Germany

Denver Germany GmbH Service
Max-Emanuel-Str. 4
94036 Passau

Phone: +49 851 379 369 40

E-Mail
support.de@denver.eu

Fairfixx GmbH
Repair and service
Rudolf-Diesel-Str. 3 TOR 2
53859 Niederkassel

(for TV, E-Mobility/Hoverboards/Balanceboards,
Smartphones & Tablets)

Phone: +49 851 379 369 69
E-Mail: denver@fairfixx.de

Austria

Lurf Premium Service GmbH
Deutschstrasse 1
1230 Wien

Phone: +43 1 904 3085
E-Mail: denver@lurfservice.at

Spain/Portugal

DENVER SPAIN S.A
Ronda Augustes y Louis Lumiere, n° 23 – nave
16
Parque Tecnológico
46980 PATERNA
Valencia (Spain)

Spain
Phone: +34 960 046 883
Mail: support.es@denver.eu

Portugal:
Phone: +35 1255 240 294
E-Mail: denver.service@satfiel.com

Poland

LetMeRepair Poland sp. z o.o.

ul. Częstochowska 140
62-800 Kalisz

Phone: 62 75 38 092
E-Mail: denver-service@letmerepair.pl

Godziny pracy: 8 – 18 (poniedziałek – piątek)

If your country is not listed above,
please write an email to
contact.hq@denver.eu



Denver A/S
Omega 5A, Soeften
DK-8382 Hinnerup
Denmark

denver.eu
facebook.com/denver.eu

