


80710212 OMNITRONIC CST-5 rund 2-Wege LS m.Transf.

- 5" Lautsprecher
- Zweiwege-System
- 100 V Trafo mit 1,25/2,5/5 W Lautstärke-Presets
- Für Beschallungsanlagen in Verkaufsräumen, Schulen, Hotels etc.

Eingangsspannung: 100 V
 Lautsprecher: 5" + 0,5"
 Nennleistung Transformator: 1,25/2,5/5 W RMS
 Nennleistung Lautsprecher: 5/10/20 W RMS
 Empfindlichkeit: 87 dB, ±3 dB (1 W, 1 m)
 Max. Schalldruck: 96 dB (1 m)
 Impedanz: 8 Ohm
 Frequenzbereich: 100 Hz - 20 kHz
 Maße (H x B x T): 203 x 203 x 80 mm
 Montageausschnitt: 170 mm ø
 Gewicht: 1,4 kg

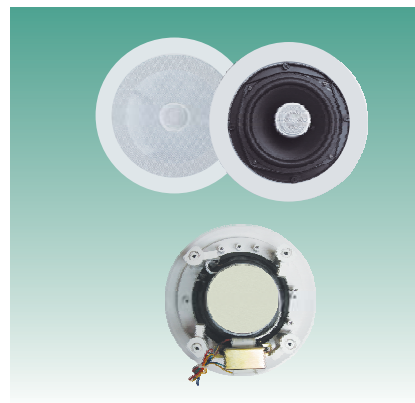

80710212 OMNITRONIC CST-5 round 2-way sp w.transf.

- 5" loudspeaker
- Two way system
- 100 V transformer with 1.25/2.5/5 W volume-presets
- For amplifying systems in sales areas, schools, hotels etc.

Input Voltage: 100 V
 Speakers: 5" + 0.5"
 Rated power transformer: 1.25/2.5/5 W RMS
 Rated power speaker: 5/10/20 W RMS
 Sensitivity (1 W/m): 87 dB, ±3 dB
 Max. SPL (1 m): 96 dB
 Impedance: 8 Ohms
 Frequency range: 100 Hz - 20 kHz
 Dimensions (H x W x D): 203 x 203 x 80 mm
 Mounting cutout: 170 mm ø
 Weight: 1.4 kg

