



Bus camera 130 for
Siedle Vario
BCM 753-0 DG
210012159-00

Product description

Bus camera 130 for Siedle Vario with automatic day/night switchover (True Day/Night) and integrated infrared lighting. Horizontal/vertical pick-up angle: approx. 130°/100°. Easy cabling thanks to pre-assembled, plug-in cable connection.

Wide Dynamic Range (WDR)

Colour system: PAL

Image pick-up: CMOS sensor 1/3" 728 x 488 pixels

Resolution: 550 TV lines

Lens: 2.1 mm

2-step heating: 12 V AC max. 130 mA

Specifications

Protection system:	IP 54, IK 10
Ambient temperature:	-20 °C to +55 °C
Height of structure (mm):	15
Dimensions (mm) W x H x D:	99 x 99 x 41

Article information

Article designation	Article description	Colour	KGSAP article no.
BCM 753-0 DG	Bus camera 130 for Siedle Vario	Micaceous dark grey	D 210012159-00

Accessories

Article designation	Article description	Colour	KG	SAP article no.
Vario 611 DG	Touch-up applicator	Micaceous dark grey	0	210007123-00
ZAK/BCM 750	Camera connecting cable for BCM 753/758-...	Others	E	210012357-00
ZVK/BCM 750/500	Connecting cable BCM 753/758-... to BTLM 750-..., 500 mm	Others	E	210012356-00

Spare parts



Bus camera 130 for
Siedle Vario
BCM 753-0 DG

210012159

Page 2


Article designation	Article description	Colour	KG	SAP article no.
ACM 671/673/678-..., BCM 65x-..., CM 61x-...	Glass cover	Clear glass	E	200048697-00
ACM 671/673/678-..., BCM 65x-..., CM 61x-... DG	Screen frame	Micaceous dark grey	E	200048701-00
BCM 753/758-...	Connecting cable BCM 753/758-... to BTLM 750-..., 300 mm	Others	E	210012355-00
Vario 611	Sealing frame modules	Grey	E	210007484-00



Bus camera 130 for
Siedle Vario
BCM 753-0 DG

210012159

Page 3

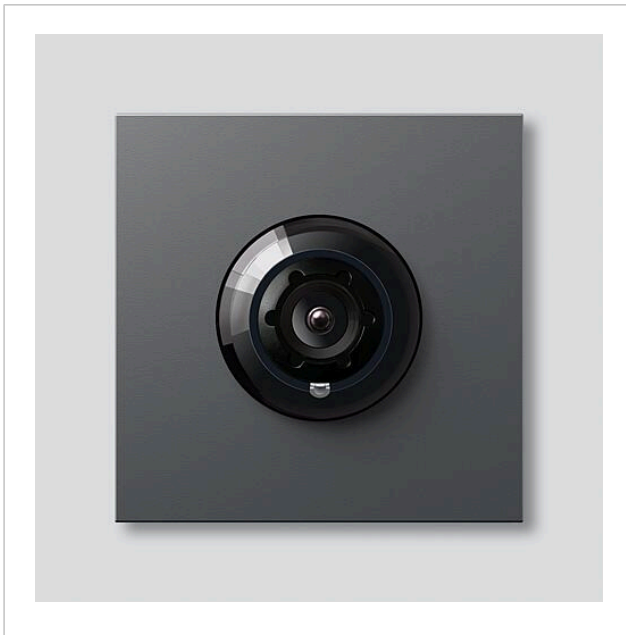



Bus camera 130 for
Siedle Vario
BCM 753-0 DG

210012159

Page 4

Bus camera 130/180	Product information	793 kB	Download
BCM 753-...	Declaration of Conformity	346 kB	Download
REACH Information	Additional information	824 kB	Download