

Lab ID#: 143
Receipt Date: Jul 5, 2018
Test Date: Jul 16, 2018

Report:

Report Date: Jul 19, 2018

DUT INFORMATION

Brand	SilverStone
Manufacturer (OEM)	Enhance Electronics
Series	Strider Titanium
Model Number	ST80F-TI
Serial Number	155200454
DUT Notes	

DUT SPECIFICATIONS

Rated Voltage (Vrms)	100-240
Rated Current (Arms)	11-5.5
Rated Frequency (Hz)	50-60
Rated Power (W)	800
Type	ATX12V
Cooling	120mm Fluid Dynamic Bearing Fan (HA1225H12F-Z)
Semi-Passive Operation	✓
Cable Design	Fully Modular

POWER SPECIFICATIONS

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	22	22	66	2.5	0.3
	Watts	120		792	12.5	3.6
Total Max. Power (W)		800				

CABLES AND CONNECTORS

Modular Cables

Description	Cable Count	Connector Count (Total)	Gauge
ATX connector 20+4 pin (550mm)	1	1	16-22AWG
4+4 pin EPS12V (550mm)	1	1	16AWG
4+4 pin EPS12V (550mm)	1	1	16AWG
6+2 pin PCIe (560mm)	6	4	16AWG
SATA (600mm+145mm+145mm+145mm)	3	12	18AWG
4 pin Molex (610mm+150mm+150mm)	1	3	18AWG
FDD Adapter (+105mm)	1	1	24AWG

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 1/14

Primary Side	
Transient Filter	4x Y caps, 4x X caps, 2x CM chokes, 1x MOV, CM02X
Inrush Protection	NTC Thermistor
Bridge Rectifier(s)	2x Vishay BU1506 (600V, 15A @ 150°C)
APFC MOSFETS	2x Infineon IPP50R140CP (550V, 15A @ 100°C, 0.14 Ohm)
APFC Boost Diode	1x CREE C3D10060A (600V, 8A @ 153°C)
Hold-up Cap(s)	1x Panasonic (450V, 560uF, 2000h @ 105°C, HD)
Main Switchers	2x Infineon IPP50R140CP (550V, 15A @ 100°C, 0.14 Ohm) Driver IC: 1x Silicon Labs Si8230BD
APFC Controller	Champion CM6502S & CM03X Green PFC controller
Switching Controller	Champion CM6901
Topology	Primary side: Half-Bridge & LLC Resonant Converter Secondary side: Synchronous Rectification & DC-DC converters
Secondary Side	
+12V MOSFETS	8x Infineon BSC014N04LS (40V, 100A @ 100°C, 1.4 mOhm)
5V & 3.3V	DC-DC Converters: 2x BSC050NE2LS FETs (25V, 37A @ 100°C, 5.0mΩ) 2x BSC018NE2LS FETs (25V, 97A @ 100°C, 1.8mΩ) PWM Controller: 2x APW7073
Filtering Capacitors	Electrolytics: Nippon Chemi-Con (105°C, KY 4,000-10,000h, KZH 5,000-6,000h), Rubycon (105°C, ZLH 6,000-10,000h, YXG 3,000-6,000h), Suncon (105°C) Polymers: Unicon (TW)
Supervisor IC	SITI PS223 (OVP, UVP, OCP, SCP, OTP)
Fan Model	Hong Hua HA1225H12F-ZA (120mm, 12V, 0.58A, 2200RPM, Fluid Dynamic Bearing)
5VSB Circuit	
Rectifier	1x PFR10V45CT & 1x SG30N04D
Standby PWM Controller	Sanken STR-A6069H

RESULTS

Temperature Range (°C /°F)	30-32 / 86-89.6 (+-2°C / +- 3.6°F)
ErP Lot 3/6 Ready	ErP Lot 3/6 2010: ✓ ErP Lot 3/6 2013: ✓ ErP Lot 3/6 2014, CEC: Partially
(EU) No 617/2013 Compliance	✓

115V

Average Efficiency	91.136%
Efficiency With 10W (≤500W) or 2% (>500W)	0.000
Average Efficiency 5VSB	80.240%
Standby Power Consumption (W)	0.0587303
Average PF	0.980
Avg Noise Output	22.77 dB(A)
Efficiency Rating (ETA)	TITANIUM
Noise Rating (LAMBDA)	A

230V

Average Efficiency	92.598%
Average Efficiency 5VSB	77.245%
Standby Power Consumption (W)	0.0927473
Average PF	0.930
Avg Noise Output	21.14 dB(A)
Efficiency Rating (ETA)	GOLD
Noise Rating (LAMBDA)	A

TEST EQUIPMENT

Electronic Loads	Chroma 6314A x2 63123A x6 63102A 63101A	Chroma 63601-5 x2 Chroma 63600-2 63640-80-80 x10 63610-80-20
AC Sources	Chroma 6530, Chroma 61604	
Power Analyzers	N4L PPA1530, N4L PPA5530	
Oscilloscopes	Picoscope 4444 & 3424, Keysight DSOX3024A, Rigol DS2072A	
Voltmeter	Keithley 2015 THD 6.5 Digit	
Sound Analyzer	Bruel & Kjaer 2250-L G4	
Microphone	Bruel & Kjaer Type 4955-A, Bruel & Kjaer Type 4189	
Data Loggers	Picoscope TC-08 x2, Labjack U3-HV x2	


All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 3/14

EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

Efficiency: SilverStone ST80F-TI
Ambient: 37°C - 46°C (98.6°F - 114.8°F)

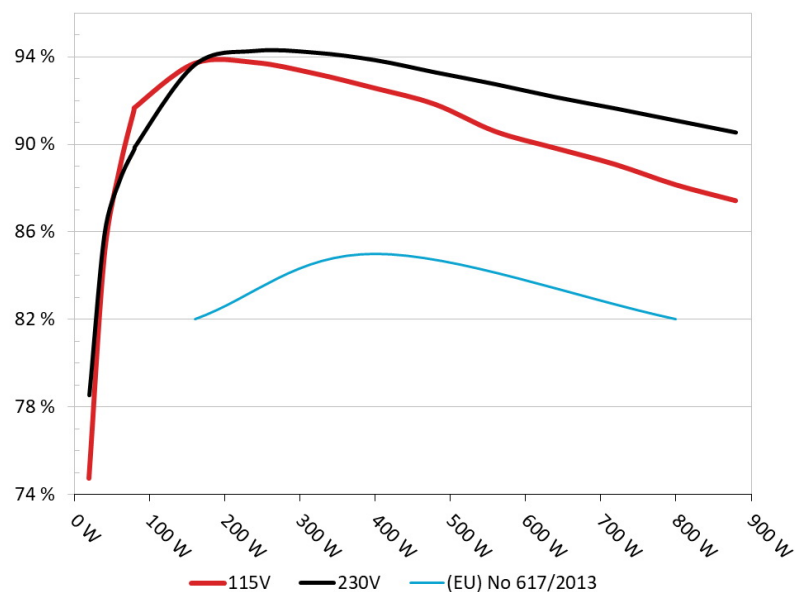


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB EFFICIENCY

5VSB Efficiency: SilverStone ST80F-TI
Ambient: 34°C - 36°C (93.2°F - 96.8°F)

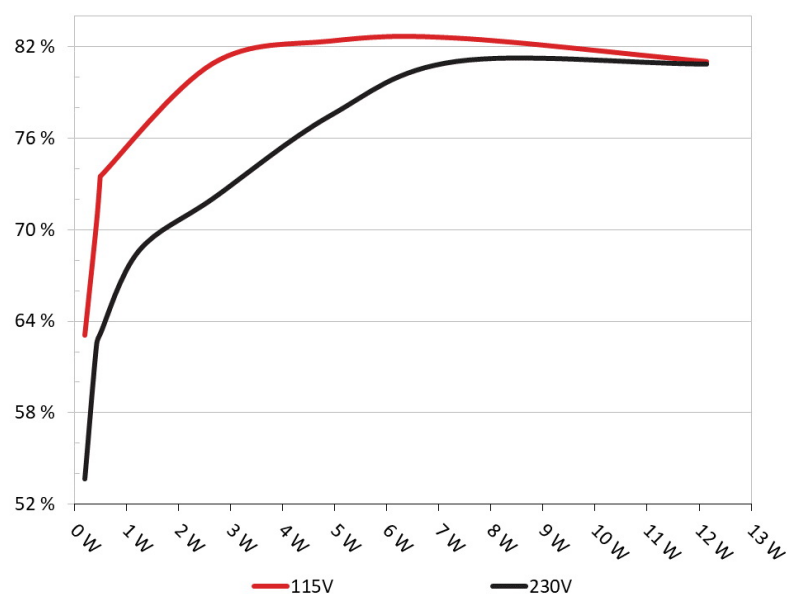

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.042A	0.205	63.077%	0.022
	4.937V	0.325		115.16V
2	0.087A	0.430	70.492%	0.041
	4.935V	0.610		115.16V
3	0.542A	2.665	80.905%	0.188
	4.919V	3.294		115.15V
4	1.002A	4.913	82.364%	0.274
	4.904V	5.965		115.16V
5	1.502A	7.338	82.561%	0.329
	4.887V	8.888		115.16V
6	2.501A	12.139	81.018%	0.385
	4.853V	14.983		115.16V

5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.042A	0.205	53.665%	0.008
	4.937V	0.382		230.38V
2	0.087A	0.429	62.445%	0.014
	4.935V	0.687		230.39V
3	0.542A	2.666	72.054%	0.072
	4.919V	3.700		230.39V
4	1.002A	4.912	77.476%	0.119
	4.904V	6.340		230.39V
5	1.501A	7.337	81.036%	0.160
	4.887V	9.054		230.39V
6	2.501A	12.136	80.858%	0.231
	4.852V	15.009		230.39V


All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 5/14

115V


EFFICIENCY GRAPH 115V

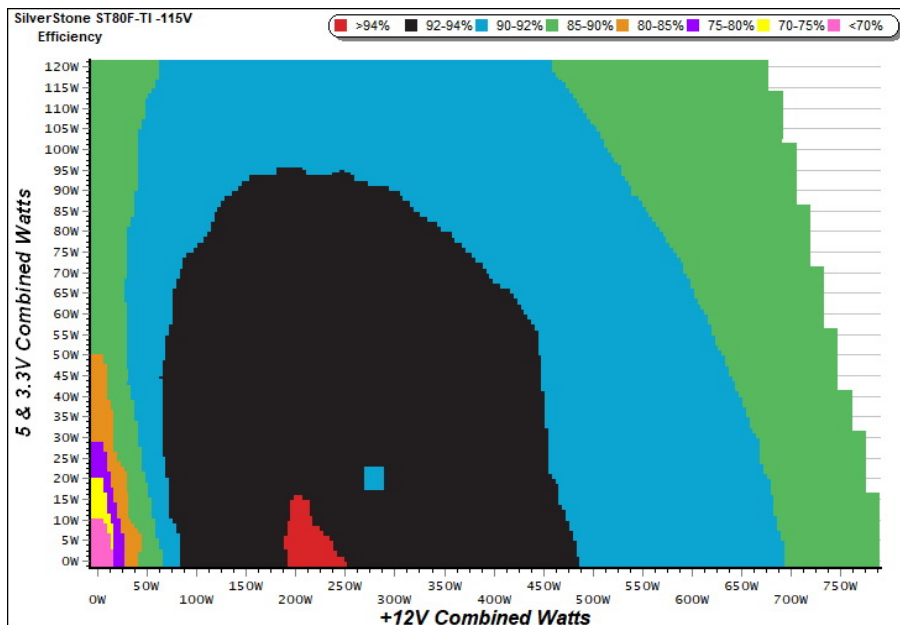

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 115V

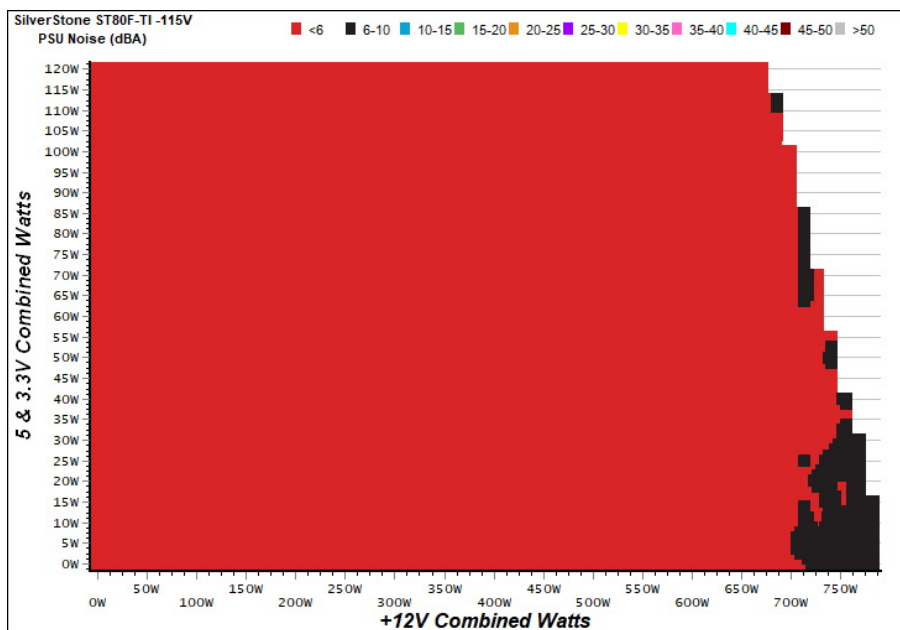

INFO


The PSU's noise in its entire operational range and under 30-32 °C (+2 °C) ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -115V

Power - 155200454 - 19/07/2017 - 10:24

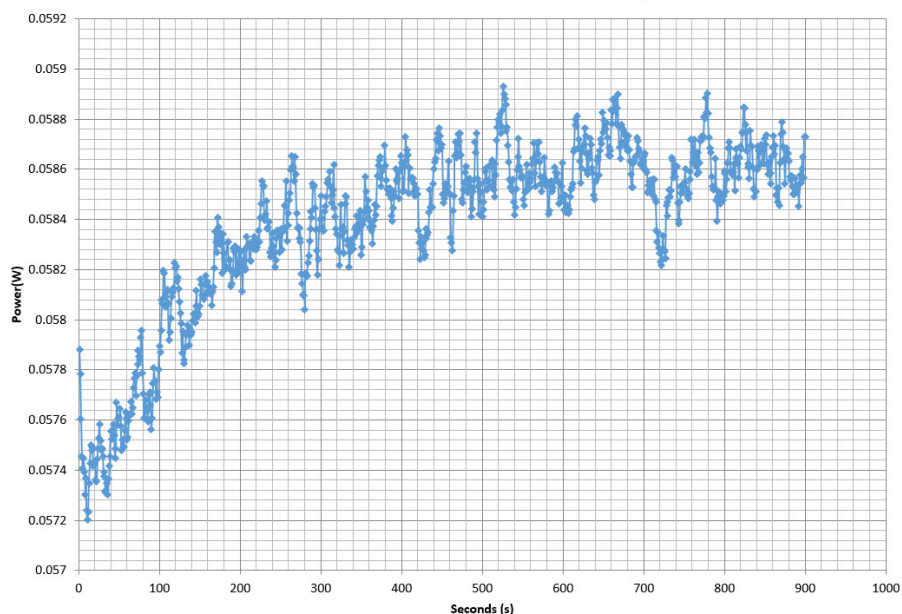

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

COMMISSION REGULATION (EU) NO 617/2013 TESTING 115V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 9/14


230V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 10/14


EFFICIENCY GRAPH 230V

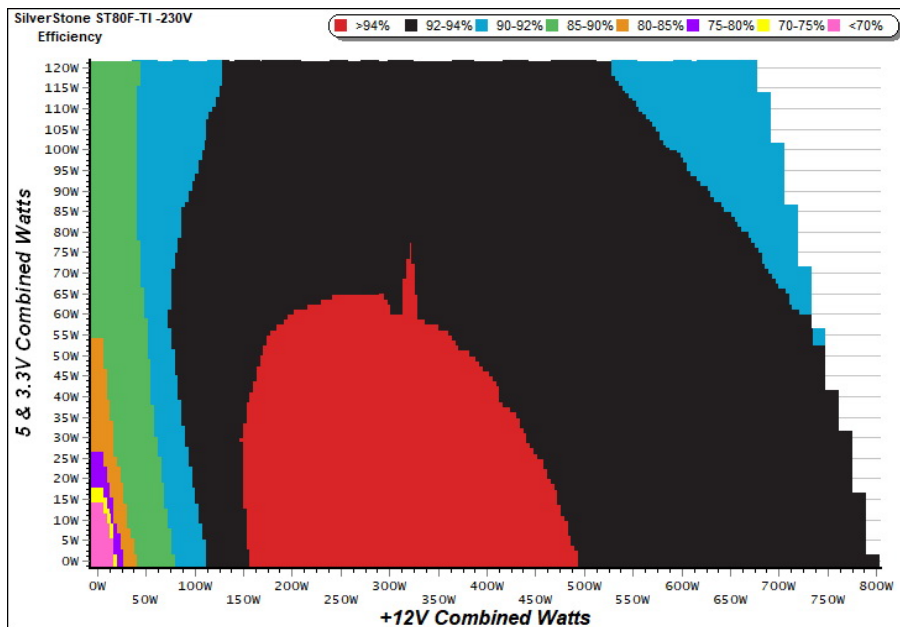

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 230V

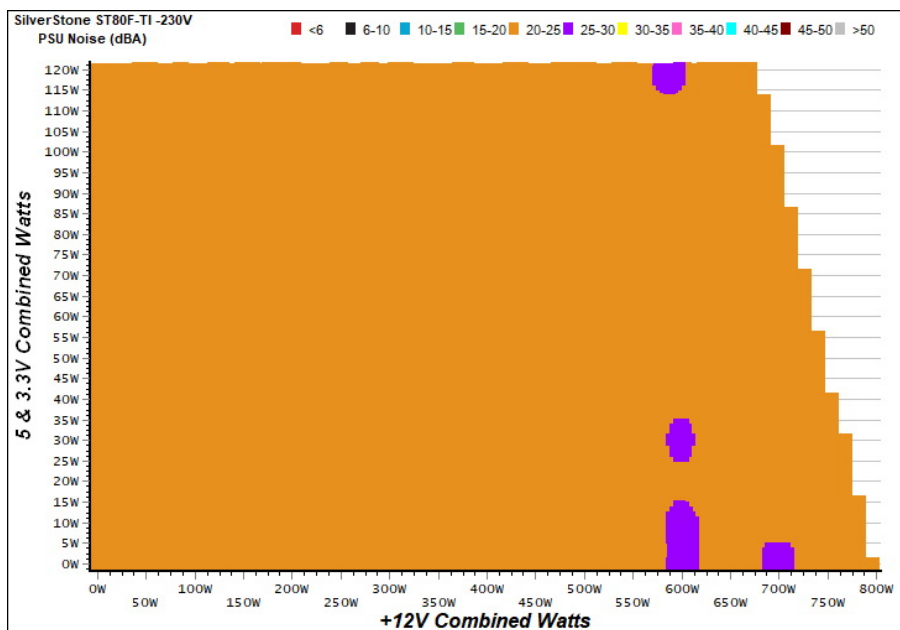

INFO


The PSU's noise in its entire operational range and under 30-32 °C (+2 °C) ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -230V

Power - 155200454 - 19/07/2017 - 10:24

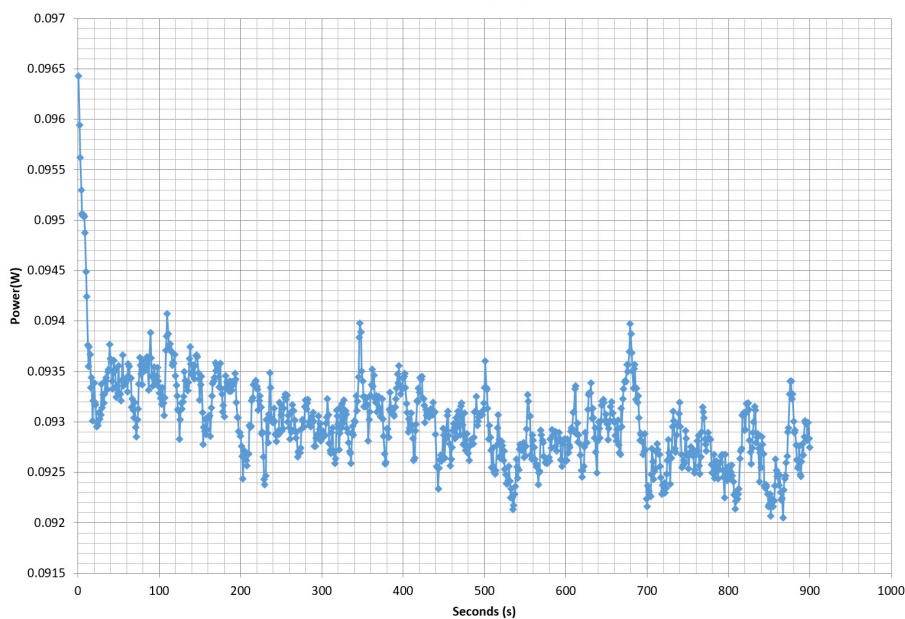

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 12/14

COMMISSION REGULATION (EU) NO 617/2013 TESTING 230V

All data and graphs included in this test report can be used by any individual on the following conditions:

- › It should be mentioned that the test results are provided by Cybenetics
- › The link to the original test results document should be provided in any case

PAGE 13/14

EFFICIENCY AND NOISE REPORT IN ACCORDANCE WITH
CYBENETICS ETA AND CYBENETICS LAMBDA PROCEDURE

SilverStone Strider Titanium 800W




Top side



Power specifications label

CERTIFICATIONS 115V

Aris Mpitsiopoulos
Lab Director

CERTIFICATIONS 230V



All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case