
SIGIL 20W TUBE AMPLIFIER



The SIGIL conjures up magical arrays of clean, to high-gain tones in a compact, portable, road-ready format. Channel one assigns GAIN 1 and MASTER 1 with a shared eq and includes 3 stages of gain with a push/pull gain boost that restructures the amp to provide everything from bright, shimmering cleans, to heavy gain pushed tones. Channel 1 loves boost and overdrive pedals for further tonal explorations. Channel 2 assigns GAIN 2 and MASTER 2 with a shared eq with a total of 4 gain stages that can be dialed from punishing, face-punching attack to over-the-top levels of gain insanity while still retaining clarity. The Standby switch offers a HIGH power selection for the full 20W, center position for standby, and LOW power selection for 6W that variacs the power amp to give the SIGIL a different feel and attack. The tube driven FX LOOP is instrument level ready for stomp boxes or rack effects.

Summon your legions – SIGIL

SIGIL front panel overview (left to right)

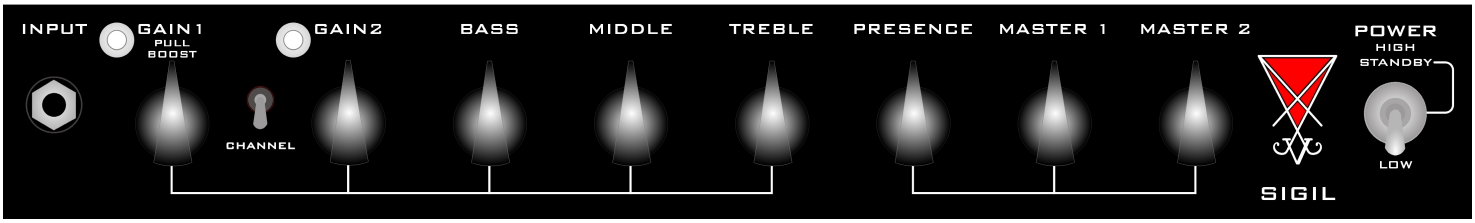

INPUT: Where you connect your instrument.

GAIN 1 w/pull boost: Sets the input gain for channel 1 that assigns GAIN 1 and MASTER 1 with a shared eq and includes 3 stages of gain with a push/pull gain boost that restructures the amp to provide everything from bright, shimmering cleans, to heavy gain pushed tones.

CHANNEL: Selects Channel 1 or Channel 2 with red LED indication. Footswitch inserted into the rear jack overrides the front panel channel switch.

GAIN 2: Sets the input gain for channel 2 that assigns GAIN 2 and MASTER 2 with a shared eq and kicks in 4 gain stages that can be dialed from punishing, face-melting attack to over-the-top levels of gain insanity while still retaining clarity.

BASS: Passive interactive low frequency equalization for all channels.

MIDDLE: Passive interactive midrange frequency equalization for all channels.

TREBLE: Passive interactive high frequency equalization for all channels.

PRESENCE: Power amp control of high frequency variable feedback.


MASTER 1: Post FX LOOP volume for GAIN 1 channel.

MASTER 2: Post FX LOOP volume for GAIN 2 channel.

SIGIL INDICATOR: Sigil lights up when power applied.

STANDBY: STANDBY = Center (power tubes only)/HIGH = UP for 20watts/LOW = Down for 6watts

SIGIL rear panel overview (left to right)

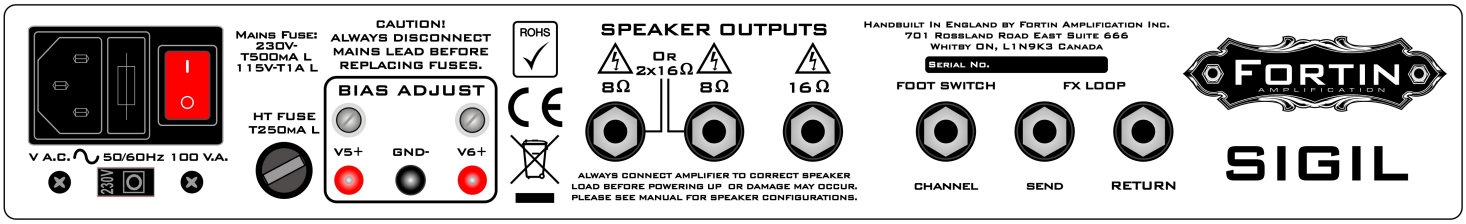

MAINS and POWER SWITCH: Input to connect wall power and turn on power.

VOLTAGE: Switchable between 115VAC and 230VAC operation.

MAINS FUSE: T1A fuse for 115VAC, T500mA fuse for 230VAC.

HT FUSE: T250mA fuse for high voltage.

BIAS ADJUST: Factory set to 22mV per tube. Refer to a qualified service tech.

SPEAKER OUTPUTS: Jacks to connect your speaker cabinet to, 16 or 8ohms.

FOOTSWITCH: Connect 1/4” footswitch to remotely switch between Channel 1 and Channel 2. Tip to ground switching. Footswitch inserted into jack overrides the front panel channel switch.

SEND: Series tube effects loop send, instrument level.

RETURN: Series tube effects loop return.

SPECIFICATIONS:
2 foot switchable channels
Series all tube loop, pedal ready
External bias controls and test points
HIGH = 20W, LOW = 6W
MAINS select 115VAC/230VAC
4-12AX7, 2-6V6
Product dimensions:
W 15in x H 7.75in x D 8in (includes handle, feet, knobs)
W 381mm x H 197mm x D 203mm (includes handle, feet, knobs)
Shipping dimensions:
23.6in x 12.2in x 12.2in @26lbs
600mm x 310mm x 310mm @12kg
Made in the UK