



THE ULTIMATE FORCE

GRYPHON Z97 ARMOR EDITION ACCESSORY INSTALLATION GUIDE

ASUS[®]
IN SEARCH OF INCREDIBLE

Copyright © 2014 ASUSTeK COMPUTER INC. All Rights Reserved.

No part of this manual, including the products and software described in it, may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means, except documentation kept by the purchaser for backup purposes, without the express written permission of ASUSTeK COMPUTER INC. ("ASUS").

Product warranty or service will not be extended if: (1) the product is repaired, modified or altered, unless such repair, modification or alteration is authorized in writing by ASUS; or (2) the serial number of the product is defaced or missing.

ASUS PROVIDES THIS MANUAL "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL ASUS, ITS DIRECTORS, OFFICERS, EMPLOYEES OR AGENTS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES (INCLUDING DAMAGES FOR LOSS OF PROFITS, LOSS OF BUSINESS, LOSS OF USE OR DATA, INTERRUPTION OF BUSINESS AND THE LIKE), EVEN IF ASUS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES ARISING FROM ANY DEFECT OR ERROR IN THIS MANUAL OR PRODUCT.

SPECIFICATIONS AND INFORMATION CONTAINED IN THIS MANUAL ARE FURNISHED FOR INFORMATIONAL USE ONLY, AND ARE SUBJECT TO CHANGE AT ANY TIME WITHOUT NOTICE, AND SHOULD NOT BE CONSTRUED AS A COMMITMENT BY ASUS. ASUS ASSUMES NO RESPONSIBILITY OR LIABILITY FOR ANY ERRORS OR INACCURACIES THAT MAY APPEAR IN THIS MANUAL, INCLUDING THE PRODUCTS AND SOFTWARE DESCRIBED IN IT.






Products and corporate names appearing in this manual may or may not be registered trademarks or copyrights of their respective companies, and are used only for identification or explanation and to the owners' benefit, without intent to infringe.

Contents

- Contents..... 3**
- Package contents..... 4**
- Installing the assistant fan 5**
- Installing the Dust Defenders..... 6**
 - Installing the DIMM slot covers 6
 - Installing the PCIe x16 and PCIe x1 slot covers 6
 - Installing the onboard connector caps 6
 - Installing the back I/O caps 7
 - Installing the back I/O dust filter 7
- Installing the Thermistor cable 8**
- Contact Information 9**

Package contents

Check your GRYPHON Z97 ARMOR EDITION motherboard package for the following items:

TUF Accessory package	TUF Connector Dust Defenders package	
 2 x DIMM slot covers	 1 x Connector cap set (LAN cap, HDMI cap, DVI cap, DP cap, Front USB 3.0 cap)	 2 x Onboard USB 2.0 connector caps
 3 x PCIe x16 slot covers	 1 x Dust Frame	 8 x Back I/O USB 3.0/2.0 connector caps
 1 x PCIe x1 slot covers	 1 x Dust Grid	 5 x Audio connector caps
 2 x short screws		 7 x SATA connector caps
3 x Thermistor cables	1 x 40 mm Assistant fan	1 x Accessory installation guide (this document)
		



- If any of the above items is damaged or missing, contact your retailer.
- To support various models, your TUF Connector Dust Defenders package may include additional onboard connector caps and back I/O port caps.
- The illustrated items above are for reference only.


Installing the assistant fan

The GRYPHON Z97 ARMOR EDITION motherboard package comes with a 40 mm assistant fan for additional cooling solution and better airflow.


To install the 40 mm assistant fan:

1. Locate and remove the screw on the back I/O (A) then remove the back I/O fan cover lid (B).

Keep the screw for later use.



2. Get the bundled 40 mm assistant fan and position it to an orientation where its THE ULTIMATE FORCE logo is facing towards the back I/O shield.
3. Match the two screw holes on the 40 mm assistant fan with the two screw holes on the cover lid and secure it with the bundled set of two (2) screws.

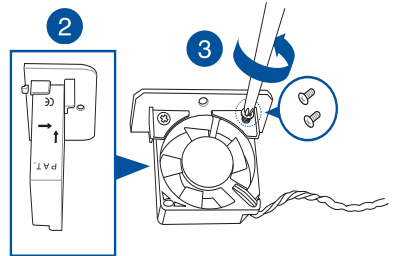

4. Align and insert the cover lid and the assistant fan assembly into the Thermal Armor and secure it with the screw that you removed in step 1.




Ensure to tuck the fan cable inside the cable corner slot.

5. Connect the fan cable connector to the assistant fan (ASST_FAN2) header on the motherboard.
6. Launch the Thermal Radar 2 utility on your computer to adjust the fan's behavior.



For more information about the Thermal Radar 2 utility, refer to your motherboard's user guide.

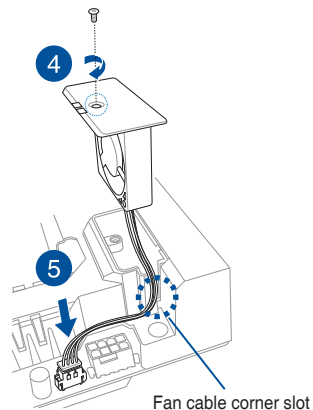


Installing the Dust Defenders

The Dust Defenders are designed to prevent dust and small particles from building up in the motherboard's expansion and memory slots or connectors.


Installing the DIMM slot covers

Install the DIMM slot covers into unused DIMM slots on your motherboard.

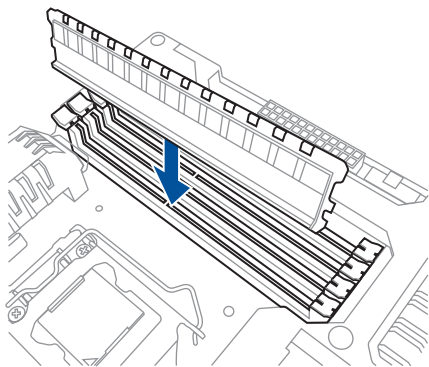

Installing the PCIe x16 and PCIe x1 slot covers

Install the PCIe x16 or PCIe x1 slot covers into unused PCIe x16 or PCIe x1 slots on your motherboard.

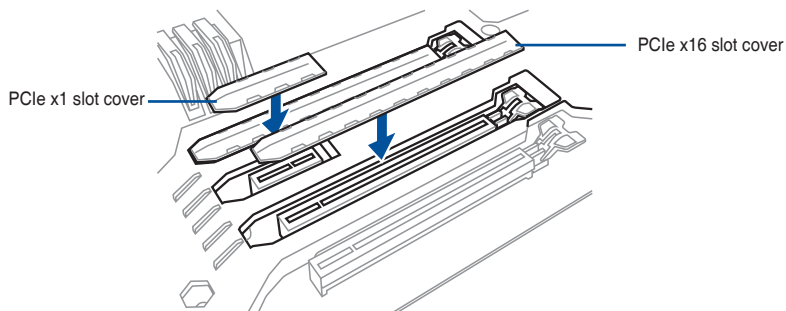

Installing the onboard connector caps

Install the onboard connector caps into unused SATA or Onboard USB 3.0/2.0 connectors on your motherboard.




To support various models, your package may include additional onboard connector caps for your motherboard.

Installing the back I/O caps

The GRYPHON Z97 ARMOR EDITION accessory package takes protection to the next level with the back I/O port caps.

Refer to the illustrated guide for the proper placement of back I/O caps:

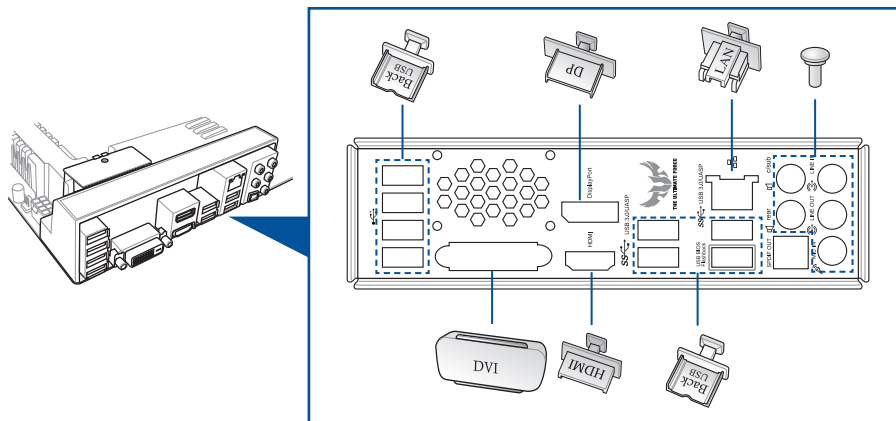


To support various models, your package may include additional back I/O port caps for your motherboard.

Installing the back I/O dust filter

The back I/O dust filter helps reduce the intake of dust and small particles into the system

To install the back I/O dust filter:


1. Match and align four holes of the back I/O dust grid and four fasteners of the back I/O dust frame then attach the dust grid to the dust frame.
2. Match and align the four fasteners of the back I/O dust frame and grid assembly to the four circular holes on the back I/O fan vent of the I/O shield then push to fasten the back I/O dust grid into the I/O shield with the back I/O dust frame.

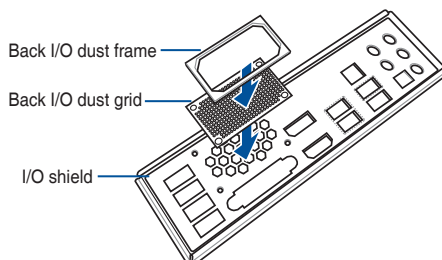

Clean your back I/O dust filter from time to time, especially when it is dirty to ensure optimum airflow.


Installing the Thermistor cable

The Thermistor cable works together with the Thermal Radar 2 utility to allow you to monitor the temperature of selected devices or critical components inside your motherboard.

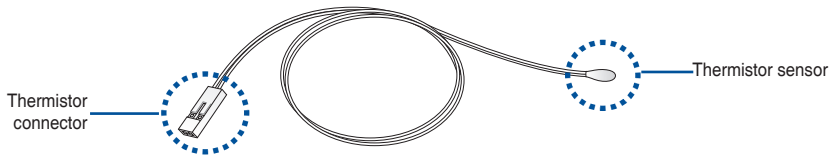

To install the Thermistor cable:

1. Locate the thermal sensor headers labeled T_SENSOR1, T_SENSOR2, or T_SENSOR3 on your motherboard then connect the thermistor cable connector to any of these headers.

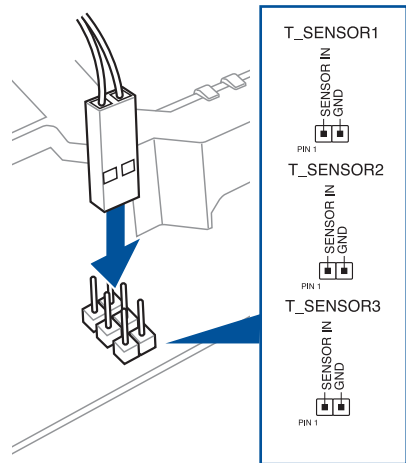


2. Put the thermistor sensor in contact with the surface of the component or part you want to monitor and secure it with an adhesive tape.



The adhesive tape is purchased separately.



The Thermistor sensor operating temperature ranges from 0°C – 80°C.



3. Launch the Thermal Radar 2 utility on your computer.

Contact Information

ASUSTeK COMPUTER INC.

Address	15 Li-Te Road, Peitou, Taipei, Taiwan 11259
Telephone	+886-2-2894-3447
Fax	+886-2-2890-7798
E-mail	info@asus.com.tw
Web site	http://www.asus.com

Technical Support

Telephone	+86-21-3842-9911
Fax	+86-21-5866-8722, ext. 9101#
Online support	http://support.asus.com/techserv/techserv.aspx

ASUS COMPUTER INTERNATIONAL (America)

Address	800 Corporate Way, Fremont, CA 94539, USA
Telephone	+1-510-739-3777
Fax	+1-510-608-4555
Web site	http://usa.asus.com

Technical Support

Support fax	+1-812-284-0883
General support	+1-812-282-2787
Online support	http://support.asus.com/techserv/techserv.aspx

ASUS COMPUTER GmbH (Germany and Austria)

Address	Harkort Str. 21-23, 40880 Ratingen, Deutschland
Fax	+49-2102-959931
Web site	http://www.asus.de
Online contact	http://eu-rma.asus.com/sales

Technical Support

Telephone	+49-2102-5789555
Support Fax	+49-2102-959911
Online support	http://support.asus.com/techserv/techserv.aspx

Where to find more information

Visit www.asus.com for additional information and product updates.



