

Anex

Corsair RM1000x (Shift)

Lab ID#: CR10002031
 Receipt Date: Jun 10, 2022
 Test Date: Jun 22, 2022

Report: 22PS2031A
 Report Date: Jun 22, 2022

DUT INFORMATION	
Brand	Corsair
Manufacturer (OEM)	CWT
Series	Shift
Model Number	RPS0161
Serial Number	22177118000051920187
DUT Notes	CP-9020253

DUT SPECIFICATIONS	
Rated Voltage (Vrms)	100-240
Rated Current (Arms)	12-6
Rated Frequency (Hz)	47-63
Rated Power (W)	1000
Type	ATX12V
Cooling	140mm Fluid Dynamic Bearing Fan (NR140P)
Semi-Passive Operation	✓
Cable Design	Fully Modular

TEST EQUIPMENT	
Electronic Loads	Chroma 63601-5 x4 Chroma 63600-2 x2 63640-80-80 x20 63610-80-20 x2
AC Sources	Chroma 6530, Keysight AC6804B
Power Analyzers	N4L PPA1530 x2
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Data Loggers	Picoscope TC-08 x2, Labjack U3-HV x2
Tachometer	UNI-T UT372 x2
Digital Multimeter	Keysight U1273AX, Fluke 289, Keithley 2015 - THD
UPS	CyberPower OLS3000E 3kVA x2
Transformer	3kVA x2

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Corsair RM1000x (Shift)

RESULTS

Temperature Range (°C /°F)	30-32 / 86-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓
ALPM (Alternative Low Power Mode) compatible	✓
ATX 3.0 Ready	✓

115V

Average Efficiency	88.494%
Efficiency With 10W (≤500W) or 2% (>500W)	76.523
Average Efficiency 5VSB	76.997%
Standby Power Consumption (W)	0.0170000
Average PF	0.991
Avg Noise Output	23.62 dB(A)
Efficiency Rating (ETA)	GOLD
Noise Rating (LAMBDA)	A

230V

Average Efficiency	90.176%
Average Efficiency 5VSB	78.295%
Standby Power Consumption (W)	0.0807000
Average PF	0.970
Avg Noise Output	23.59 dB(A)
Efficiency Rating (ETA)	GOLD
Noise Rating (LAMBDA)	A

POWER SPECIFICATIONS

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	20	20	83.3	3	0
	Watts	150		1000	15	0
Total Max. Power (W)		1000				

HOLD-UP TIME & POWER OK SIGNAL (230V)

Hold-Up Time (ms)	24
AC Loss to PWR_OK Hold Up Time (ms)	21
PWR_OK Inactive to DC Loss Delay (ms)	3

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 2/17

CABLES AND CONNECTORS

Modular Cables

Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors
ATX connector 20+4 pin (610mm)	1	1	16-18AWG	No
4+4 pin EPS12V (650mm)	2	2	18AWG	No
12 pin PCIe (660mm)	1	1	16AWG	No
6+2 pin PCIe (660mm)	3	3	16AWG	No
6+2 pin PCIe (660mm+100mm)	2	4	16-18AWG	No
SATA (460mm+110mm+110mm+110mm)	4	16	18AWG	No
4 pin Molex (450mm+100mm+100mm+100mm)	2	8	18AWG	No
AC Power Cord (1400mm) - C13 coupler	1	1	16AWG	-

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 3/17

Anex

Corsair RM1000x (Shift)

General Data	-
Manufacturer (OEM)	CWT
PCB Type	Double Sided
Primary Side	-
Transient Filter	6x Y caps, 2x X caps, 2x CM chokes, 1x MOV
Inrush Protection	1x NTC Thermistor SCK20150 (15 Ohm) & Relay
Bridge Rectifier(s)	2x GBJ2506 (600V, 25A @ 100°C)
APFC MOSFETs	3x Infineon IPA60R125P6 (600V, 19A @ 100°C, Rds(on): 0.125Ohm) & 1x Sync Power SPN5003 FET (for reduced no-load consumption)
APFC Boost Diode	1x On Semiconductor FFSP1065A (650V, 10A @ 152°C)
Bulk Cap(s)	1x Nippon Chemi-Con (400V, 560uF, 2,000h @ 105°C, KMR) & 1x Nippon Chemi-Con (400V, 470uF, 2,000h @ 105°C, KMW)
Main Switchers	4x Infineon IPA60R190P6 (600V, 12.7A @ 100°C, Rds(on): 0.19Ohm)
Driver IC(s)	Champion CM6500UN
Digital Controllers	Champion CU6901VAC
Topology	Primary side: APFC, Full-bridge & LLC converter Secondary side: Synchronous Rectification & DC-DC converters
Secondary Side	-
+12V MOSFETs	6x Infineon BSC014N06NS (60V, 152A @ 100°C, Rds(on): 1.45mOhm)
5V & 3.3V	DC-DC Converters: 4x UBIQ QN3107M6N (30V, 70A @ 100°C, Rds(on): 2.6mOhm) PWM Controllers: UPI-Semi uP3861P
Filtering Capacitors	Electrolytic: 4x Nichicon (2-5,000h @ 105°C, HD), 1x Nichicon (5-6,000h @ 105°C, HV), 1x Nippon Chemi-Con (1-5,000h @ 105°C, KZE), 1x Nippon Chemi-Con (4-10,000h @ 105°C, KYA) 4x Nichicon (4-10,000h @ 105°C, HE) Polymer: 28x FPCAP, 11x Nippon Chemi-Con
Supervisor IC	Weltrend WT7502R
Fan controller	Microchip PIC16F1503
Fan Model	Corsair NR140P (140mm, 12V, 0.22A, Fluid Dynamic Bearing Fan)
5VSB Circuit	-
Rectifier	1x PS1045L SBR (45V, 10A)
Standby PWM Controller	On-Bright OB2365T


All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 4/17

EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

Efficiency: Corsair RM1000x (Shift)
Ambient: 37°C - 47°C (98.6°F - 116.6°F)

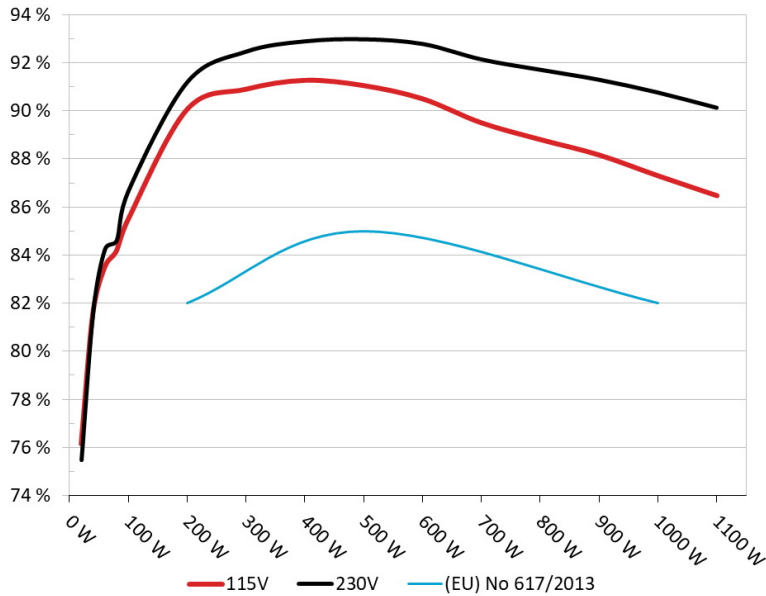


INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

5VSB EFFICIENCY

5VSB Efficiency: Corsair RM1000x (Shift)
Ambient: 34°C - 36°C (93.2°F - 96.8°F)

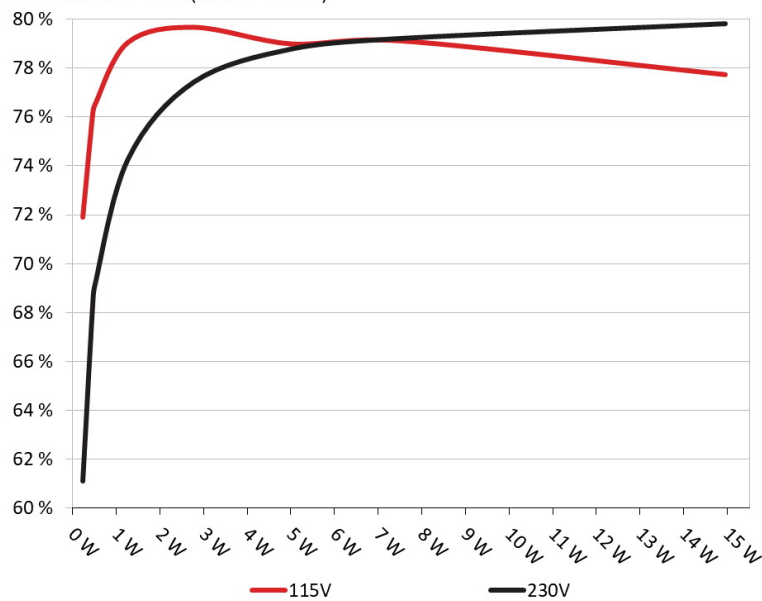

INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.228W	71.889%	0.031
	5.056V	0.317W		115.17V
2	0.09A	0.455W	76.123%	0.058
	5.056V	0.598W		115.17V
3	0.55A	2.776W	79.667%	0.275
	5.045V	3.485W		115.17V
4	1A	5.036W	78.98%	0.39
	5.034V	6.377W		115.17V
5	1.5A	7.535W	79.11%	0.452
	5.022V	9.526W		115.18V
6	3.001A	14.956W	77.729%	0.528
	4.985V	19.241W		115.16V

5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.228W	61.094%	0.011
	5.057V	0.373W		230.4V
2	0.09A	0.455W	68.317%	0.02
	5.056V	0.666W		230.4V
3	0.55A	2.776W	77.42%	0.102
	5.045V	3.586W		230.4V
4	1A	5.036W	78.779%	0.171
	5.034V	6.393W		230.4V
5	1.5A	7.535W	79.202%	0.234
	5.022V	9.513W		230.4V
6	3A	14.956W	79.804%	0.353
	4.985V	18.741W		230.4V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Corsair RM1000x (Shift)


115V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 7/17


EFFICIENCY GRAPH 115V

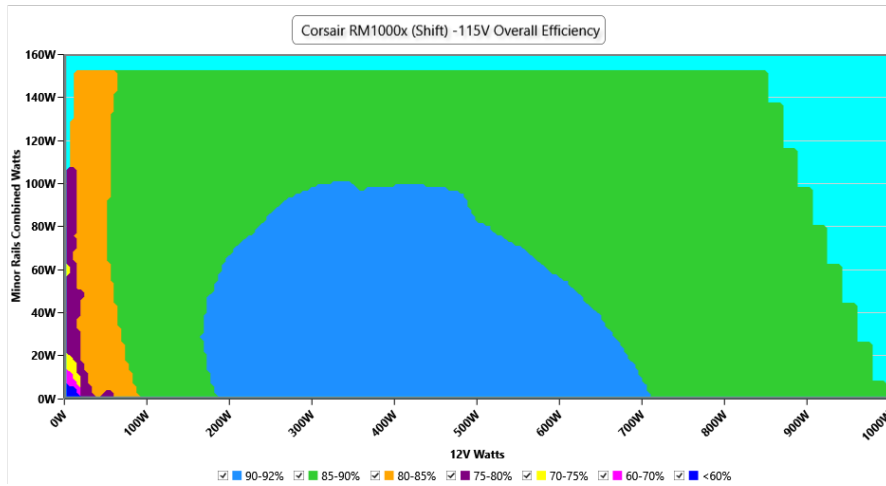

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 115V

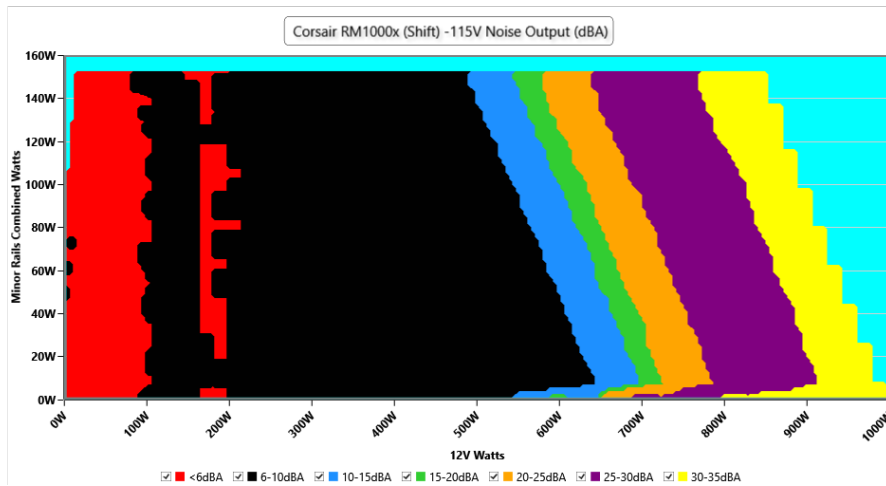

INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Corsair RM1000x (Shift)

VAMPIRE POWER -115V

Detailed Results

	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	115.18 V	115.15 V	113.85 V	115.19 V	116.15 V	PASS
Mains Frequency:	60.00 Hz	60.00 Hz	59.40 Hz	60.01 Hz	60.60 Hz	PASS
Mains Voltage CF:	1.415	1.415	1.340	1.416	1.490	PASS
Mains Voltage THD:	0.13 %	0.11 %	N/A	0.15 %	2.00 %	PASS
Real Power:	0.017 W	0.015 W	N/A	0.019 W	N/A	N/A
Apparent Power:	10.171 W	10.167 W	N/A	10.177 W	N/A	N/A
Power Factor:	0.002	N/A	N/A	N/A	N/A	N/A

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 9/17

10-110% LOAD TESTS 115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	6.534A	1.978A	1.992A	0.996A	100.02	85.511%	0	<6.0	44.18°C	0.981
	12.002V	5.057V	3.314V	5.021V	116.968				40.06°C	115.14V
20%	14.105A	2.968A	2.989A	1.198A	199.978	90.072%	0	<6.0	44.49°C	0.99
	11.987V	5.055V	3.312V	5.008V	222.02				40.17°C	115.11V
30%	22.037A	3.464A	3.489A	1.402A	300.021	90.913%	0	<6.0	45.98°C	0.993
	11.978V	5.053V	3.31V	4.996V	330.012				41.36°C	115.08V
40%	29.929A	3.96A	3.99A	1.606A	399.81	91.281%	0	<6.0	47.29°C	0.992
	11.981V	5.051V	3.309V	4.982V	438.002				42.26°C	115.06V
50%	37.478A	4.953A	4.991A	1.812A	499.545	91.065%	0	<6.0	47.96°C	0.992
	11.981V	5.049V	3.306V	4.969V	548.559				42.46°C	115.04V
60%	45.101A	5.947A	5.993A	2.001A	600.039	90.512%	489	7.3	43.15°C	0.993
	11.979V	5.046V	3.304V	4.971V	662.942				49.22°C	115.01V
70%	52.551A	6.945A	6.995A	2.188A	699.849	89.515%	650	14.7	43.44°C	0.995
	12.002V	5.041V	3.303V	5.029V	781.82				50.47°C	114.98V
80%	60.253A	7.944A	7.998A	2.291A	799.917	88.819%	818	23.3	43.78°C	0.995
	11.982V	5.037V	3.301V	5.02V	900.605				51.79°C	114.95V
90%	68.239A	8.446A	8.487A	2.396A	899.696	88.179%	976	28.8	44.78°C	0.996
	11.975V	5.033V	3.299V	5.01V	1020.317				54.09°C	114.93V
100%	76.010A	8.949A	9.006A	3.011A	999.741	87.314%	1127	33.0	45.39°C	0.996
	11.973V	5.03V	3.298V	4.983V	1144.983				55.57°C	114.9V
110%	83.710A	9.949A	10.103A	3.017A	1100.346	86.482%	1264	36.9	46.75°C	0.997
	11.970V	5.027V	3.296V	4.972V	1272.351				57.69°C	114.87V
CL1	0.117A	17.848A	18.073A	0A	151.318	82.091%	492	7.5	42.59°C	0.989
	12.008V	5.06V	3.298V	5.015V	184.331				47.97°C	115.12V
CL2	0.117A	19.727A	0A	0A	101.405	81.52%	489	7.3	43.06°C	0.982
	12.014V	5.07V	3.3V	5.04V	124.393				49.44°C	115.14V
CL3	0.116A	0A	19.959A	0A	67.4	76.072%	488	7.3	44.56°C	0.972
	12.010V	5.062V	3.307V	5.026V	88.603				51.88°C	115.15V
CL4	83.602A	0.001A	0.001A	0.001A	1000.23	88.297%	1152	33.4	45.88°C	0.996
	11.964V	5.036V	3.304V	5.078V	1132.796				55.77°C	114.9V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Corsair RM1000x (Shift)

20-80W LOAD TESTS 115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.234A	0.495A	0.498A	0.198A	20.005	76.156%	0	<6.0	40.02°C	0.854
	12.032V	5.055V	3.315V	5.051V	26.266				36.95°C	115.16V
40W	2.716A	0.692A	0.697A	0.297A	40.004	81.626%	0	<6.0	41.14°C	0.938
	12.035V	5.056V	3.316V	5.046V	49.009				37.82°C	115.16V
60W	4.196A	0.89A	0.896A	0.397A	60.003	83.516%	0	<6.0	41.99°C	0.965
	12.041V	5.057V	3.315V	5.042V	71.847				38.32°C	115.15V
80W	5.694A	1.088A	1.095A	0.497A	79.965	84.19%	0	<6.0	42.36°C	0.974
	12.002V	5.057V	3.315V	5.037V	94.981				38.44°C	115.14V

RIPPLE MEASUREMENTS 115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	10.01mV	4.40mV	4.91mV	8.41mV	Pass
20% Load	11.42mV	5.73mV	6.34mV	8.98mV	Pass
30% Load	12.05mV	6.95mV	7.57mV	10.61mV	Pass
40% Load	14.05mV	10.23mV	10.18mV	11.16mV	Pass
50% Load	13.59mV	15.14mV	15.10mV	12.03mV	Pass
60% Load	15.07mV	11.15mV	12.74mV	12.80mV	Pass
70% Load	17.11mV	19.43mV	21.75mV	15.34mV	Pass
80% Load	18.39mV	13.14mV	18.99mV	16.67mV	Pass
90% Load	21.15mV	15.65mV	21.80mV	18.35mV	Pass
100% Load	26.04mV	16.96mV	23.37mV	20.58mV	Pass
110% Load	28.40mV	16.97mV	23.22mV	21.43mV	Pass
Crossload1	16.89mV	8.77mV	14.39mV	8.85mV	Pass
Crossload2	10.46mV	5.52mV	5.12mV	7.03mV	Pass
Crossload3	6.69mV	4.04mV	12.49mV	6.12mV	Pass
Crossload4	25.16mV	14.80mV	17.13mV	16.06mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 11/17

Anex

Corsair RM1000x (Shift)

230V

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 12/17

Anex

Corsair RM1000x (Shift)


EFFICIENCY GRAPH 230V

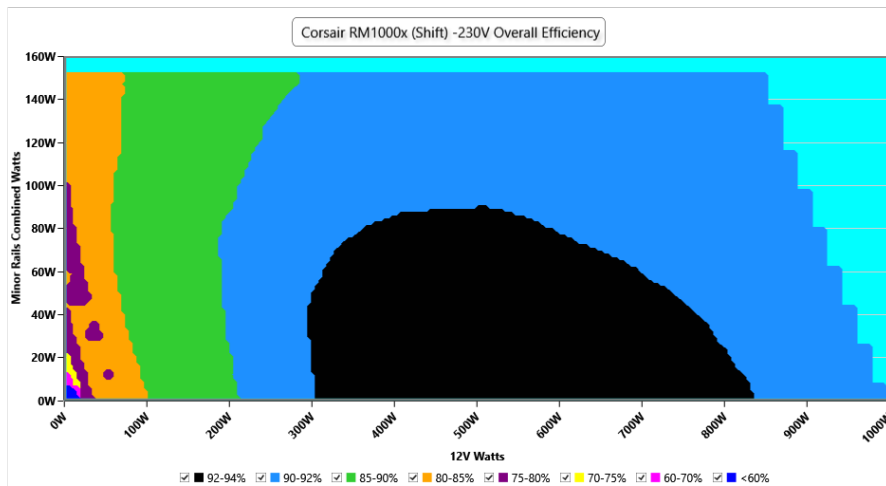

INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

NOISE GRAPH 230V

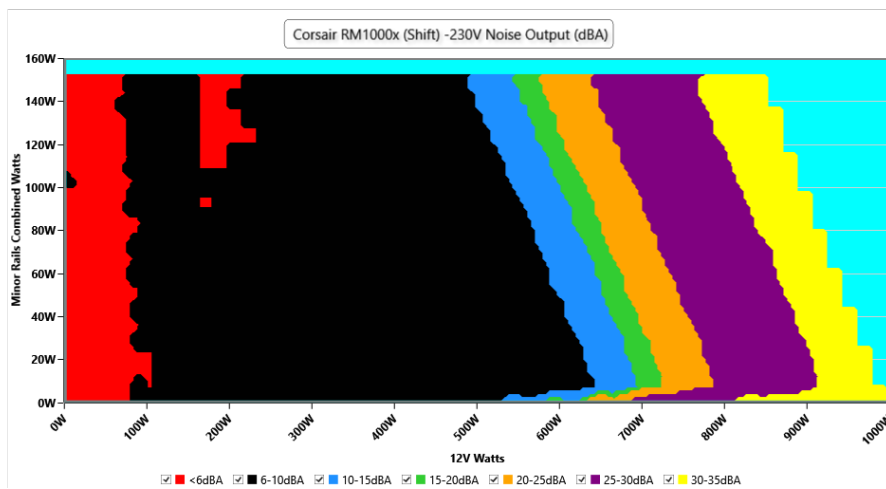

INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

VAMPIRE POWER -230V

Detailed Results

	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	230.38 V	230.38 V	227.70 V	230.42 V	232.30 V	PASS
Mains Frequency:	50.00 Hz	50.00 Hz	49.50 Hz	50.00 Hz	50.50 Hz	PASS
Mains Voltage CF:	1.415	1.415	1.340	1.416	1.490	PASS
Mains Voltage THD:	0.14 %	0.13 %	N/A	0.16 %	2.00 %	PASS
Real Power:	0.081 W	0.072 W	N/A	0.090 W	N/A	N/A
Apparent Power:	33.993 W	33.982 W	N/A	34.001 W	N/A	N/A
Power Factor:	0.002	N/A	N/A	N/A	N/A	N/A

INFO

This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

10-110% LOAD TESTS 230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	6.530A	1.976A	1.992A	0.996A	100.022	86.69%	0	<6.0	44.44°C	0.884
	12.008V	5.061V	3.314V	5.02V	115.376				40.35°C	230.4V
20%	14.104A	2.966A	2.99A	1.199A	199.981	91.203%	0	<6.0	45.06°C	0.949
	11.988V	5.058V	3.312V	5.007V	219.269				40.68°C	230.39V
30%	22.028A	3.462A	3.49A	1.402A	300.04	92.47%	0	<6.0	46.22°C	0.968
	11.984V	5.056V	3.31V	4.994V	324.472				41.52°C	230.38V
40%	29.932A	3.959A	3.991A	1.607A	399.843	92.899%	0	<6.0	47.13°C	0.977
	11.981V	5.054V	3.308V	4.98V	430.406				42.11°C	230.37V
50%	37.467A	4.949A	4.992A	1.812A	499.593	92.984%	0	<6.0	47.91°C	0.981
	11.986V	5.053V	3.305V	4.967V	537.282				42.39°C	230.36V
60%	45.118A	5.945A	5.994A	2.001A	600.065	92.79%	489	7.3	42.51°C	0.984
	11.976V	5.048V	3.304V	4.969V	646.698				48.63°C	230.35V
70%	52.581A	6.944A	6.995A	2.192A	699.834	92.148%	651	14.8	43.04°C	0.987
	11.995V	5.042V	3.303V	5.02V	759.464				50.08°C	230.33V
80%	60.273A	7.941A	7.998A	2.291A	799.883	91.716%	818	23.3	43.19°C	0.988
	11.978V	5.039V	3.301V	5.02V	872.133				51.42°C	230.33V
90%	68.257A	8.443A	8.487A	2.396A	899.686	91.303%	975	28.8	44.03°C	0.989
	11.972V	5.035V	3.299V	5.009V	985.381				53.24°C	230.31V
100%	76.024A	8.954A	9.007A	3.01A	999.696	90.771%	1123	32.9	45.68°C	0.99
	11.970V	5.027V	3.298V	4.984V	1101.34				55.77°C	230.29V
110%	83.725A	9.954A	10.105A	3.017A	1100.342	90.136%	1273	37.1	46.97°C	0.991
	11.968V	5.024V	3.295V	4.973V	1220.761				57.91°C	230.28V
CL1	0.117A	17.857A	18.087A	0A	151.315	83.244%	489	7.3	42.62°C	0.938
	11.999V	5.057V	3.295V	5.015V	181.767				48.18°C	230.4V
CL2	0.116A	19.74A	0A	0A	101.402	80.878%	488	7.3	43.13°C	0.901
	12.021V	5.066V	3.301V	5.04V	125.38				50.16°C	230.4V
CL3	0.116A	0A	19.959A	0A	67.399	74.438%	487	7.2	44.28°C	0.847
	12.010V	5.059V	3.307V	5.026V	90.543				52.39°C	230.4V
CL4	83.554A	0.001A	0.001A	0.001A	1000.238	91.419%	1149	33.3	45.31°C	0.99
	11.971V	5.033V	3.305V	5.078V	1094.133				55.31°C	230.29V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Corsair RM1000x (Shift)

20-80W LOAD TESTS 230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.234A	0.494A	0.498A	0.198A	20.008	75.477%	0	<6.0	40.01°C	0.489
	12.040V	5.059V	3.315V	5.05V	26.503				36.89°C	230.41V
40W	2.716A	0.692A	0.697A	0.297A	40.006	81.675%	0	<6.0	40.51°C	0.686
	12.039V	5.06V	3.315V	5.046V	48.981				37.23°C	230.41V
60W	4.196A	0.89A	0.896A	0.397A	60.003	84.254%	0	<6.0	42.21°C	0.795
	12.041V	5.06V	3.315V	5.042V	71.216				38.67°C	230.4V
80W	5.692A	1.087A	1.095A	0.497A	79.966	84.611%	0	<6.0	43.32°C	0.85
	12.004V	5.06V	3.315V	5.036V	94.506				39.57°C	230.4V

RIPPLE MEASUREMENTS 230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	10.61mV	3.89mV	4.35mV	6.83mV	Pass
20% Load	12.45mV	5.11mV	5.63mV	8.77mV	Pass
30% Load	11.48mV	6.96mV	7.06mV	9.48mV	Pass
40% Load	13.13mV	9.46mV	10.19mV	10.81mV	Pass
50% Load	13.48mV	13.91mV	14.23mV	11.47mV	Pass
60% Load	14.76mV	11.71mV	12.08mV	12.34mV	Pass
70% Load	17.62mV	18.61mV	20.06mV	14.99mV	Pass
80% Load	19.25mV	14.11mV	19.75mV	16.57mV	Pass
90% Load	20.69mV	15.14mV	21.14mV	18.45mV	Pass
100% Load	27.18mV	16.47mV	22.73mV	19.95mV	Pass
110% Load	28.36mV	16.54mV	23.97mV	21.27mV	Pass
Crossload1	17.33mV	7.66mV	14.18mV	8.01mV	Pass
Crossload2	6.69mV	5.62mV	5.17mV	6.48mV	Pass
Crossload3	6.28mV	4.09mV	13.10mV	6.12mV	Pass
Crossload4	26.53mV	15.06mV	17.31mV	15.92mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case


PAGE 16/17

Anex

Corsair RM1000x (Shift)



Top side

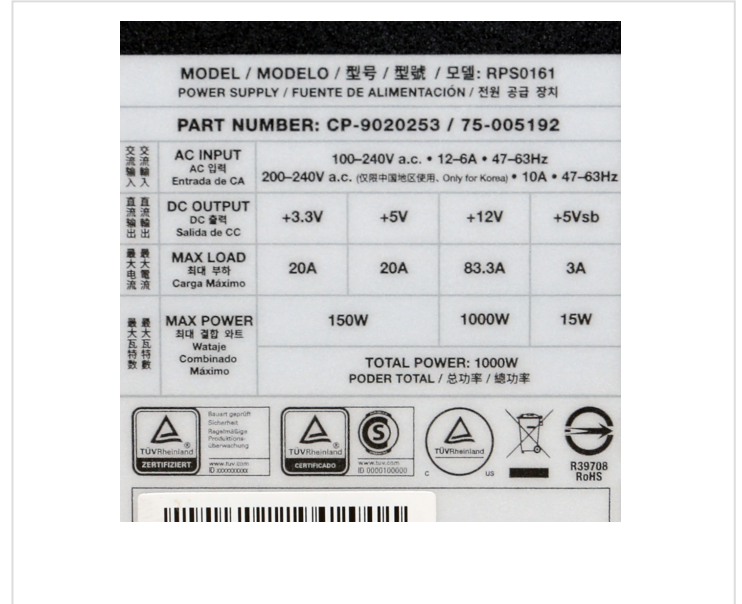


Power specifications label

CERTIFICATIONS 115V



CERTIFICATIONS 230V



All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case