



>BUY NOW
www.msi.com

BUSINESS & PRODUCTIVITY

A Window to The World



PRO DP130 12M



Modern AM272P 12M



Modern MD272 Series

Powered by Intel® Core™ i7 Processors

2022 H2



- CASE SHARING -



More Case Sharing

PACAS

PACAS is a company in the south of Italy that supplies hardware and software for call-center all over Italy, using MSI Modern AM241.

PACAS' business strategy includes the creation of office furniture, while for the hardware part it supplies MSI Business & Productivity products thus building customer loyalty.



BHT CLINIC ISTANBUL TEMA HOSPITAL

As BHT Clinic Istanbul Tema Hospital, we use MSI PRO 22XT 10M-013XTR to perform radiological imaging so that we can reflect the treatment images and provide better service to our patients. Having a touch screen provides us with great convenience and we can complete our transactions in a shorter time.

Thanks to the high resolution and color tones, we receive positive feedback from both our doctors and our patients.



Acecore Technologies

Founded in 2013, Acecore Technologies is a leading developer and manufacturer of European hand-built Unmanned Aerial Vehicles for industrial, security, inspection and cinema markets.

Acecore uses only high-quality materials and OEM components like the MSI Cubi 5 Mini PC for optimized performance.



Hoàng Hà PC


To grow business in North Vietnam, Hoàng Hà PC open a new show room in Hanoi.

MSI Modern MD241P Ultramarine and Modern MD241PW are used in working space and being testing monitor of new PC build.



Greenhouse by Muir

The MSI PRO 16T 10M is used as a POS terminal, with the touch screen it is easy to use as a POS system where visitors pay.

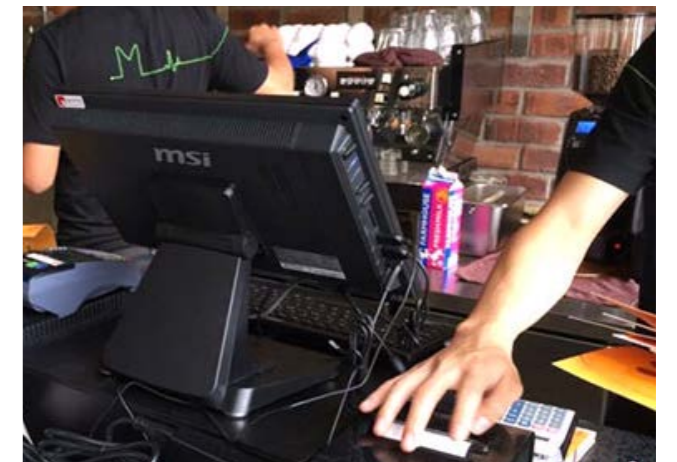

Expo 2015

Expo story is an exposition that has covered all the editions of the Universal Exhibition.

Thousands of visitors were able to discover the history of the universal exhibition by experiencing 12 MSI PRO 16 Flex 8GL.



PRO-Series Desktop

4KUHD
3840 x 2160
UHD

USB 3.2 Gen-1 Type-C

Complete I/O


Matrix Display

Compact Size

TPM 2.0

MSI Center

Wall Mountable

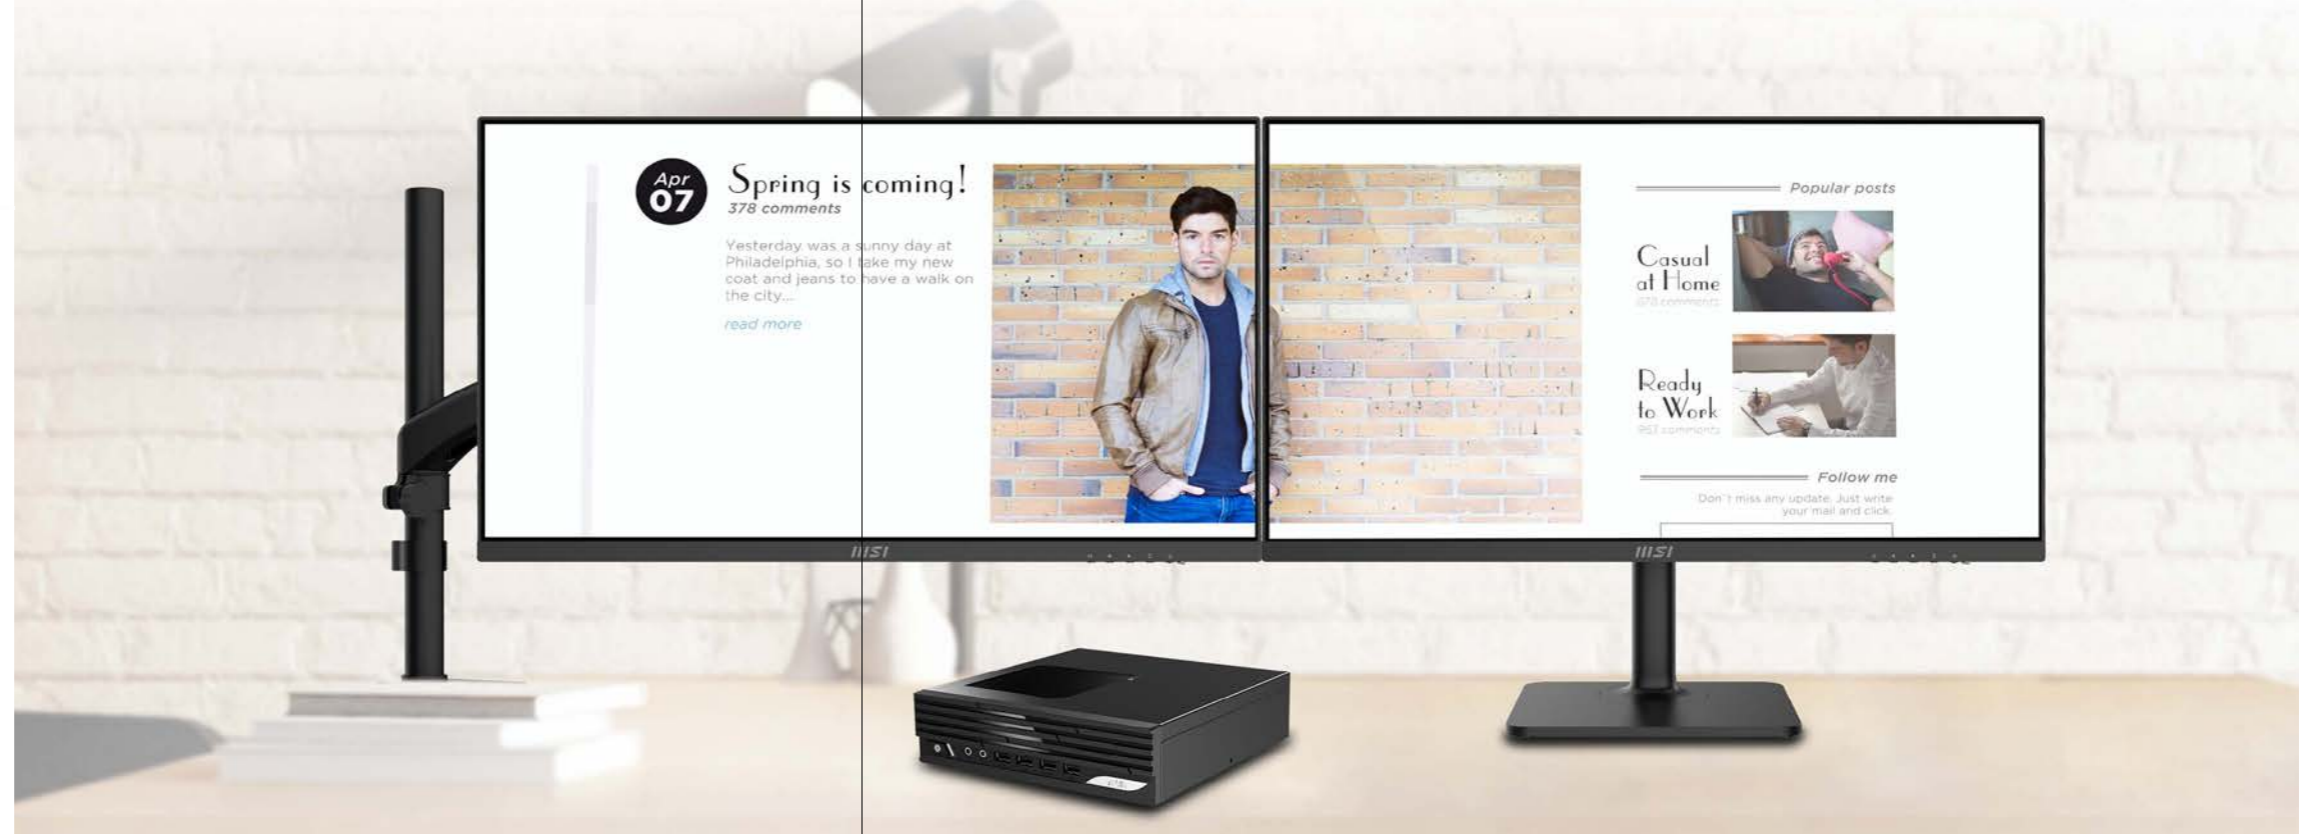

Model	PRO DP10 13M	PRO DP20ZA 5M
Operating System	Windows 11 Home Windows 11 Pro	Windows 11 Home Windows 11 Pro
CPU	Intel® Core™ i7-1360P Intel® Core™ i5-1340P Intel® Core™ i3-1315U	Ryzen™ 7 5700G Ryzen™ 5 5600G Ryzen™ 3 5300G
Chipset	Intel® SoC	AMD B300
GPU	Intel® UHD Graphics or Intel® Iris® Xe Graphics (i5 above)	Integrated AMD Radeon™ Graphic
Memory	2x DDR4 3200MHz SO-DIMMs, up to 64GB	2x DDR4 2666/ 3200MHz SO-DIMMs, up to 64 GB
Storage	2x M.2 SSD (auto switch) 1x 2.5" SSD / HDD	2x M.2 SSD (auto switch) 2x 2.5" SSD / HDD
Wireless	Intel® Wi-Fi 6E AX211 Intel® AC 9462	Intel® Wi-Fi 6 AX200 Intel® Wireless AC 3168
I/O (Front)	3 x USB 3.2 Gen2 Type A 1x USB 3.2 Gen2 Type C 1x Mic-in/Headphone-out combo	1x Mic-in/Headphone-out 1x USB 3.2 Gen2 Type A 1x USB 3.2 Gen2 Type C 1x Mic-in
I/O (Rear)	1x Thunderbolt 4 2x USB 3.2 Gen 1 Type A 1x RJ45 1x HDMI out (2.0b) 1x DisplayPort (1.4) 1x D-Sub (VGA) (Switchable to COM port for option) 1x Kensington Lock	1x USB 3.2 Gen2 Type A 3x USB 2.0 Type A 1x HDMI out (2.0) 1x VGA out 1x RJ45 1x DP out (1.4) 1x COM Port 1x DC Jack 1x Kensington Lock
Volume	1.1 Liter/ 2.32pt	2.6 Liter (4.58 pt)
Dimension (WxDxH)	178.82 x 34.48 x 179 mm (7.04 x 1.36 x 7.05 inch)	85 x 160.55 x 193.3 mm (3.35 x 6.32 x 7.61 inch)
AC Adapter	120W	120W



Model	PRO DP21 13M	PRO DP130 12 / 12SA / 12RK	PRO DP180 13
Operating System	Windows 11 Home Windows 11 Pro	Windows 11 Home Windows 11 Pro	Windows 11 Home Windows 11 Pro
CPU	Intel® Core™ i7-13700 Intel® Core™ i5-13400 Intel® Core™ i3-13100	Intel® Core™ i7-12700/ i7-12700F Intel® Core™ i5-12400/ i5-12400F Intel® Core™ i3-12100	Core™ i7-13700 Core™ i5-13400 Core™ i3-13100
Chipset	Intel® H610	Intel® H610	Intel® H610
GPU	Intel UHD Graphics	MSI GeForce GTX 1650 4GT LP 4GB GDDR5 MSI GeForce GT 1030 2GD4 LP 2GB DDR4 (either one)	MSI GeForce RTX™ 3060 VENTUS 2X 12G MSI GeForce GTX 1660 SUPER VENTUS XS
Memory	2x DDR4 3200MHz SO-DIMMs, up to 64GB	2x DDR4 3200MHz U-DIMMs, up to 64GB	2x DDR4 3200MHz U-DIMMs, up to 64GB
Storage	1x M.2 SSD (auto switch) 2x 2.5" SSD / HDD	1x M.2 SSD (auto switch) 1x 3.5" HDD	1x M.2 SSD (auto switch) 1x 2.5" SSD / HDD 1x 3.5" HDD
Wireless	Intel® Wi-Fi 6E AX211 Intel® AC 3168 Intel® AC 9462	Intel® Wi-Fi 6E AX211 Intel® AC 3168	Intel® Wi-Fi 6E AX211
I/O (Front)	4x USB 2.0 Type A 1x Mic-in 1x Headphone-out	1x USB 3.2 Gen 2 Type C 2x USB 3.2 Gen 1 Type A 2x USB 2.0 Type A 1x Mic-in 1x Headphone-out	1 x USB 3.2 Gen2 Type C 2 x USB 3.2 Gen1 Type A 1x Mic-in/Headphone-out combo 1x Card Reader
I/O (Rear)	1x USB 3.2 Gen 2 Type-C 1x USB 3.2 Gen 2 Type-A 2x USB 3.2 Gen 1 Type-A 1x HDMI out (2.0) 1x DisplayPort out (1.4) 1x Mic-in 1x Line-out 1x RJ45 1x COM port 1x Kensington Lock Slot 1x Kensington Lock	1x USB 3.2 Gen 1 Type A 4x USB 2.0 Type A 1x RJ45 1x DP out (1.4) 1x HDMI out (2.0) 1x VGA out 1x PS/2 1x Mic-in 1x Line-out 1x Line-in 1x COM port 1x Kensington Lock	1x USB 3.2 Gen 1 Type A 4x USB 2.0 Type A 1x RJ45 1x HDMI out (2.0b) 1x Display Port (1.4) 1x D-Sub (VGA) 1x COM port 1x PS/2 3x Audio Jack 1x Kensington Lock 1x PadLock
Volume	2.3 L (4.86 pt)	13 L (22.88 pt)	18 Liter/ 38.04 pt
Dimension (WxDxH)	204 x 208 x 54.8 mm (8.03 x 8.19 x 2.16 inch)	97 x 430.2 x 340 mm (3.82 x 16.94 x 13.39 inch)	168 x 323 x 360 mm (6.61 x 12.72 x 14.17 inch)
AC Adapter	120W	350W 80 Plus Bronze Certified PSU	500W ATX (dGPU)



Mini PC



Model	Cubi 5 12M	Cubi N ADL
Operating System	Windows 11 Home Windows 11 Pro	Windows 11 Home Windows 11 Pro
CPU	Intel® Core™ i7-1255U Intel® Core™ i5-1235U Intel® Core™ i3-1215U	Intel® N200 Intel® N100
Chipset	Intel® SoC	Intel® SoC
GPU	Intel® Iris® Xe Graphics (i5 above)	Intel UHD Graphics
Memory	2x DDR4 3200MHz SO-DIMMs, up to 64GB	1x DDR4 3200MHz SO-DIMMs, up to 16GB
Storage	1x M.2 SSD (auto switch) 1x 2.5" SSD / HDD	1x M.2 SSD (auto switch) 1x 2.5" SSD / HDD
Wireless	Intel® Wi-Fi 6E AX211 Intel® AC 3168	Intel® Wireless AC 3168 Intel® Wireless AC 9462
I/O (Front)	2 x USB 3.2 Gen 2x1 Type-A 1x Thunderbolt 4 1 x Mic-in/ Headphone-out combo	1x USB 3.2 Gen 2x1 Type-C With DP Alt Mode 2x USB 3.2 Gen 2x1 Type-A 1x Mic-in/Headphone-out combo
I/O (Rear)	1x USB 3.2 Gen 2x1 Type-A 1x HDMI out 1x DisplayPort out 2x RJ45 1x Kensington Lock	2x USB 2.0 Type-A 1x HDMI-out (2.0b) 1x DP-out (1.4) 2x RJ45 1x Kensington Lock Slot
Volume	0.7 Liter	0.7 Liter
Dimension (WxDxH)	124 x 124 x 53.7 mm (4.88 x 4.88 x 2.11 inch)	124 x 124 x 53.7 mm (4.88 x 4.88 x 2.11 inch)
AC Adapter	65W	65W

4K UHD
3840 x 2160

UHD



Matrix Display



Easy To Upgrade



USB3.2-Gen-1 Type-C



Wall Mountable



Silent PRO Cooling



Small Size



Do More Work Simultaneously

With the HDMI and DP ports, MSI Cubi 5 can support dual monitors, you can do and view more.



Easy To Upgrade

Only remove 4 screws at the bottom cover to gain access and replace the M.2 SSD, memory modules and 2.5" HDD/SSD storage slots. It's just that simple.

Mountable To A Monitor

Cubi 5 is designed with a mini size and supports standard VESA-mount. Mount the Cubi 5 to the back of a monitor and make the PC completely invisible.



All-in-One PC



Anti-Flicker With Eye-Care Technology

MSI's Anti-Flicker technology eliminates flickering and effectively reduces eye fatigue caused by prolonged screen time while enhancing the productivity at home or in the office.



MSI Eye Care: Anti-Flicker + Less Blue Light + Anti-Glare

MSI Anti-Flicker, Less Blue Light technologies and anti-glare panel help to protect your eyes over extended periods of viewing your data and research.

Full HD + IR Webcam

Join a clearer online conference call or online course while working from home or learning at home.
(Support Windows Hello.)



Tobii Aware: Security And Privacy

The contents of the screen are blurred when the user looks or steps away, and un-blurred only for the correct user.


MSI Cloud Center

Fast, secure, and wireless backup & download between your PC and mobile devices.

You can make these files accessible to your family or team members, or you can also make files as private as you want. The decision is in your hands.



AIO Modern Series

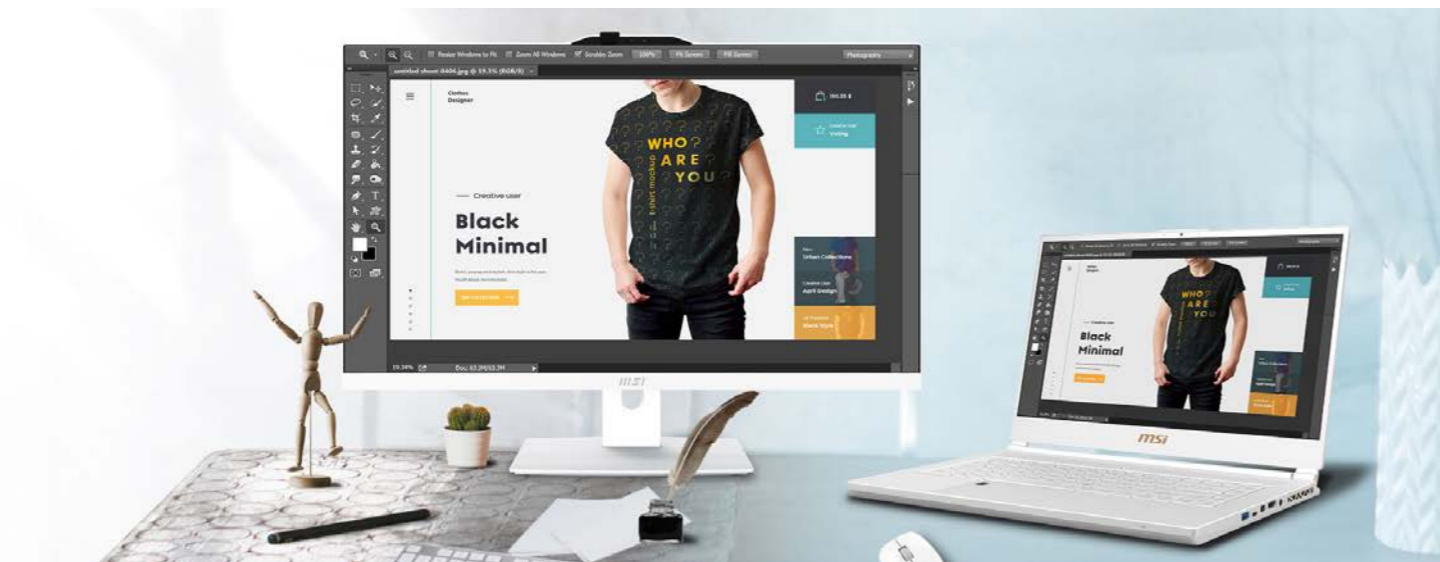

Model	Modern AM272P 12M	Modern AM242/TP 12M
Operating System	Windows 11 Home Windows 11 Pro	Windows 11 Home Windows 11 Pro
CPU	Intel® Core™ i7-1260P Intel® Core™ i5-1240P	Intel® Core™ i7-1260P Intel® Core™ i5-1240P
Chipset	Intel® SoC	Intel® SoC
Display	27" IPS Panel	23.8" IPS Panel
Resolution	1920 x 1080 FHD	1920 x 1080 FHD
GPU	Intel® Iris® Xe Graphics (i5 above)	Intel® Iris® Xe Graphics (i5 above)
Memory	2x DDR4 2666/ 3200 MHz SO-DIMM, up to 64GB	2x DDR4 2666/ 3200 MHz SO-DIMM, up to 64GB
Storage	1x M.2 SSD (PCIe/SATA auto-switch) 1x 2.5" SSD/HDD	1x M.2 SSD (auto switch) 1x 2.5" HDD / SSD
Speaker	2x 2.5W	2x 2.5W
Wireless	Intel® Wi-Fi 6E AX211 Intel® Wi-Fi 6 AX201 Intel® AC 3168	Intel® Wi-Fi 6E AX211 Intel® Wi-Fi 6 AX201 Intel® AC 3168
I/O	Side: 2x USB 3.2 Gen 2 Type C 2x USB 3.2 Gen 2 Type A 1x Mic-in/Headphone-out combo Rear: 1x HDMI-in 1x HDMI out (2.0) 2x USB 2.0 Type A 1x RJ45 LAN 1x Kensington Lock	Side: 2x USB 3.2 Gen 2 Type C 2x USB 3.2 Gen 2 Type A 1x Mic-in/Headphone-out combo Rear: 1x HDMI in 1x HDMI out (2.0) 2x USB 2.0 Type A 1x RJ45 LAN 1x Kensington Lock
Adjustment	-4° - 20° (Tilt) ; 0 - 130mm (Height)	[AM242] -5° - 15° (Tilt) [AM242P] -4° - 20° (Tilt) ; 0 - 130mm (Height)
Web Cam	Yes (Support Windows Hello) Removable webcam cover design	Yes (Support Windows Hello) Removable webcam cover design
Wall Mount	Yes (75 x 75 mm)	Yes (75 x 75 mm)
AC Adapter	120W	120W
Dimension (WxDxH)	611.75 x 194.68 x 561.48 mm [24.08 x 7.66 x 22.11 inch]	[AM242] 554.10 x 175.09 x 406.86 mm [21.31 x 6.89 x 16.02 inch] [AM242P] 541.40 x 194.68 x 534.92 mm [21.31 x 7.66 x 21.06 inch]

AIO PRO Series



Model	PRO AP272 13M / AP242 13M	PRO AP243TP 12M
Operating System	Windows 11 Home Windows 11 Pro	Windows 11 Home Windows 11 Pro
CPU	Intel® Core i7-12700 Intel® Core i5-12400 Intel® Core i3-12100	Intel® Core i7-12700 Intel® Core i5-12400 Intel® Core i3-12100
Chipset	Intel® H610	Intel® H610
Display	[PRO AP272 13M] 27" IPS Panel / [PRO AP242 13M] 23.8" IPS Panel	23.8" IPS Panel
Resolution	1920 x 1080 FHD	1920 x 1080 FHD
GPU	Intel® UHD Graphics	Intel® UHD Graphics
Memory	2x DDR4 2666/ 3200 MHz SO-DIMMs, up to 64GB	2x DDR4 2666/ 3200MHz SO-DIMMs, up to 64GB
Storage	1x M.2 SSD (auto switch) 1x 2.5" HDD / SSD	1x M.2 SSD (auto switch) 1x 2.5" HDD / SSD
Speaker	2x 2.5W	2x 2.5W
Wireless	Intel® Wi-Fi 6E AX211 Intel® Wi-Fi 6 AX201 Intel® AC 3168	Intel® Wi-Fi 6E AX211 Intel® Wi-Fi 6 AX201 Intel® AC 3168
I/O	Side: 2x USB 2.0 Type A Rear: 1x USB 3.2 Gen 2 Type C 1x USB 3.2 Gen 2 Type A 2x USB 3.2 Gen 1 Type A 1x RJ45 1x HDMI out (2.0b) 1x DP out (1.4) 1x Mic-in 1x Line-out 1x Kensington Lock	Side: 2x USB 2.0 Type A Rear: 1x USB 3.2 Gen 2 Type C 1x USB 3.2 Gen 2 Type A 2x USB 3.2 Gen 1 Type A 1x RJ45 1x HDMI out (2.0b) 1x DP out (1.4) 1x Mic-in 1x Line-out 1x Kensington Lock
Adjustment	-5° - 20° (Tilt)	-4° - 20° (Tilt) / 0 - 130mm (Height)
Web Cam	Yes (Support Windows Hello) Removable webcam cover design	Yes (Support Windows Hello) Removable webcam cover design
Wall Mount	Support VESA wall mount kit with specific screws	Support VESA wall mount kit with specific screws
AC Adapter	120W	120W
Dimension (WxDxH)	[PRO AP272 13M] 611.75 x 194.68 x 561.48 mm [24.08 x 7.66 x 22.10 inch] [PRO AP242 13M] 541.93 x 227.93 x 425.5mm [21.34 x 8.97 x 16.75 inch]	530.06 x 194.68 x 492.62mm [20.87 x 7.66 x 19.39 inch]

Modern Series Monitor



- IPS Wide View Angle
- Anti-Flicker
- Anti-Glare
- Less Blue Light
- Adjustable Stand
*Available for specific models
- KVM
*Modern MD272 Series
- Productivity Intelligence
- Display Kit Support
- Wall Mountable
(75x75mm)
- 65W
*Modern MD272 Series
- Built-in Speakers
- TÜV certified



Model	Modern MD272QP / W / Ultramarine (27")
Colorway	Black / White / Ultramarine
Panel Type	IPS
Resolution	2560 x 1440 (WQHD)
Brightness (nits)	300 cd/m2
Contrast Ratio	1000:1
Refresh Rate	75Hz
Response Time	4ms (GTG)
View Angles	178°(H) / 178°(V)
sRGB	95% (CIE 1976)
Display Colors	16.7M
Color Bit	8 bits



I/O	1x USB 2.0 Type B 2x USB 2.0 Type A 1x HDMI (1.4b) 1x DisplayPort (1.2) 1x Type C (DP Alternate) with 65W power delivery 1x Headphone-out
Speaker	2x 2W
Adjustment	-5° ~ 20° (Tilt) -30° ~ 30° (Swivel) -90° ~ 90° (Pivot) 0 ~ 110mm (Height)
VESA Mounting	75 x 75 mm
Dimension (W x D x H)	613.5 x 200.81 x 401.5 mm (24.15 x 7.91 x 15.81 inch)
Note	HDMI: 2560 x 1440 (Up to 75Hz) DisplayPort: 2560 x 1440 (Up to 75Hz) Type-C: 2560 x 1440 (Up to 75Hz) KVM Switch Design FreeSync Support




KVM Switch Design

Improves productivity, saves space, and money by allowing you to use multiple computers with one set of keyboard, monitor, and mouse.

Type C 65W Power Delivery

- Reversible Connection
- Display
- Cable Management

Built-in an USB Type-C connection with 65W power delivery allows you to effortlessly connect to and charge your devices.

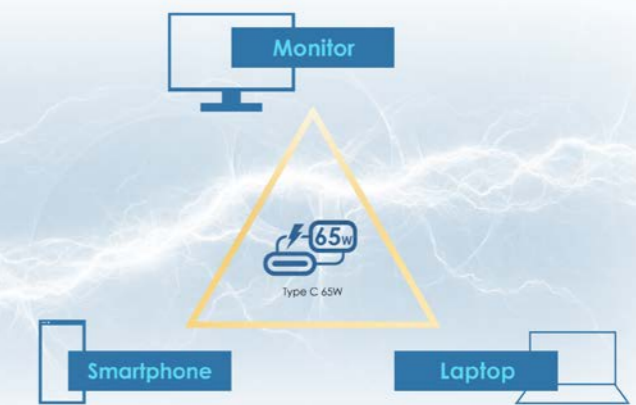



Modern MD272P / W (27")

- Colorway: Black / White
- Panel Type: IPS
- Resolution: 1920 x 1080 (Full HD)
- Brightness (nits): 250 cd/m2
- Contrast Ratio: 1000:1
- Refresh Rate: 75Hz
- Response Time: 5ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB: 100% (CIE 1976)
- Display Colors: 16.7M
- Color Bit: 8 bits
- I/O:
 - 1x USB 2.0 Type B
 - 2x USB 2.0 Type A
 - 1x HDMI (2.0b)
 - 1x DisplayPort (1.2)
 - 1x Type C (DP Alternate)
 - 1x Type C (DP Alternate) with 65W power delivery
 - 1x Headphone-out
- Speaker: 2x 2W
- Adjustment:
 - 5° ~ 20° (Tilt)
 - 30° ~ 30° (Swivel)
 - 90° ~ 90° (Pivot)
 - 0 ~ 110mm (Height)
- VESA Mounting: 75 x 75 mm
- Dimension (W x D x H): 613.5 x 200.81 x 401.5 mm (24.15 x 7.91 x 15.81 inch)
- Note:
 - HDMI: 1920 x 1080 (Up to 75Hz)
 - DisplayPort: 1920 x 1080 (Up to 75Hz)
 - Type-C: 1920 x 1080 (Up to 75Hz)
 - KVM Switch Design



Modern MD271PW (27") / MD241PW (24")

- Colorway: Black / White
- Panel Type: IPS
- Resolution: 1920 x 1080 (Full HD)
- Brightness (nits): 250 cd/m2
- Contrast Ratio: 1000:1
- Refresh Rate: 75Hz
- Response Time: 5ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB:
 - MD271PW: 104.61% (CIE 1976)
 - MD242PW: 110.03% (CIE 1976)
- Display Colors: 16.7M
- Color Bit: 8 bits
- I/O:
 - 1x HDMI (1.4b)
 - 1x Type C (DP Alternate)
 - 1x Headphone-out
- Speaker: 2x 1W
- Adjustment:
 - 5° ~ 20° (Tilt)
 - 30° ~ 30° (Swivel)
 - 90° ~ 90° (Pivot)
 - 0 ~ 110mm (Height)
- VESA Mounting: 75 x 75 mm
- Dimension (W x D x H):
 - [MD271P / W] 613.5 x 200.81 x 401.5 mm (24.15 x 7.91 x 15.81 inch)
 - [MD241P / W] 541.94 x 200.81 x 380.97 mm (21.34 x 7.91 x 15.00 inch)
- Note:
 - HDMI: 1920 x 1080 (Up to 75Hz)
 - Type-C: 1920 x 1080 (Up to 75Hz)



Modern MD271CP / W (27")

- Colorway: Black / White
- Panel Type: VA
- Resolution: 1920 x 1080 (Full HD)
- Brightness (nits): 250 cd/m2
- Contrast Ratio: 3000:1
- Refresh Rate: 75Hz
- Response Time: 4ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB: 102% (CIE 1976)
- Display Colors: 16.7M
- Color Bit: 8 bits
- I/O:
 - 1x HDMI (1.4b)
 - 1x Type C (DP Alternate)
 - 1x Headphone-out
- Speaker: 2x 1W
- Adjustment:
 - 5° ~ 20° (Tilt)
 - 30° ~ 30° (Swivel)
 - 0 ~ 110mm (Height)
- VESA Mounting: 75 x 75 mm
- Dimension (W x D x H): 611.5 x 250 x 533.7 mm (24.07 x 9.84 x 21.01 inch)
- Note:
 - HDMI: 1920x 1080 (Up to 75Hz)
 - Type-C: 1920x 1080 (Up to 75Hz)




**TUV Certified –
Protect Your Eyes
With Less Blue Light
Technology**



Eye Care



TUV Certified

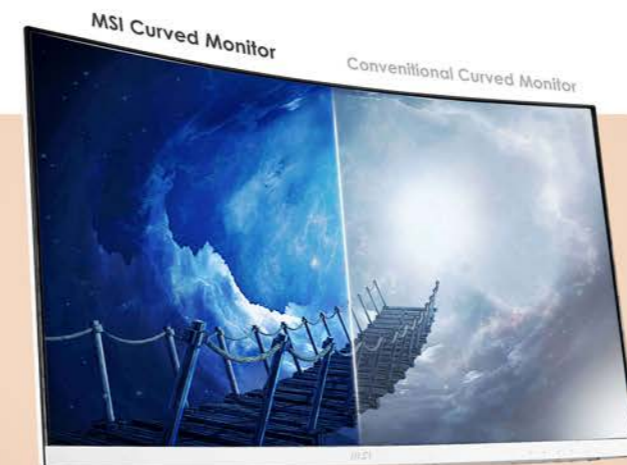

1500R Curvature

Modern MD271C Series delivers a 3000:1 Static contrast ratio for a deeper black and more brilliant white in even the darkest and brightest scenes.

PRO Series Monitor



PRO MP341CQ / W (34")

- Colorway: Black / White
- Panel Type: VA
- Curvature: Curved 1500R
- Resolution: 3440x1440 (UWQHD)
- Brightness (nits): 300 cd/m²
- Contrast Ratio: 3000:1
- Refresh Rate: 100Hz
- Response Time: 1ms (MPRT) / 4ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB: 116.25% (CIE 1976)
- Display Colors: 1.07B
- Color Bit: 10 bits (8 bits + FRC)
- I/O: 2x HDMI (2.0b), 1x DP (1.2a), 1x Headphone-out
- Speaker: 2x 2W
- Adjustment: -3.5° - 21.5° (Tilt)
- VESA Mounting: 100 x 100 mm
- Dimension (W x D x H): 809.3 x 237.0 x 469.5 mm (31.86 x 9.33 x 18.48 inch)
- Note: HDMI: 3440 x 1440 (Up to 100Hz), DP: 3440 x 1440 (Up to 100Hz), FreeSync Support

Curved 1500R



PRO MP272C (27")

- Colorway: Black
- Panel Type: VA
- Curvature: Curved 1500R
- Resolution: 1920 x 1080 (FHD)
- Brightness (nits): 250 cd/m²
- Contrast Ratio: 4000:1
- Refresh Rate: 75Hz
- Response Time: 1ms (MPRT) / 5ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB: 98% (CIE 1976)
- Display Colors: 16.7M
- Color Bit: 8 bits
- I/O: 1x HDMI (1.4b), 1x D-Sub (VGA), 1x Line-in, 1x Headphone-out
- Speaker: 2x 2W
- Adjustment: -5° - 20° (Tilt)
- VESA Mounting: 100 x 100 mm
- Dimension (W x D x H): 610.5 x 250 x 462.5 mm (24.04 x 9.84 x 18.21 inch)
- Note: HDMI: 1920 x 1080 (Up to 75Hz), D-Sub: 1920 x 1080 (Up to 60Hz), Energy Star 8.0, FreeSync Support



PRO MP271C / W (27")

- Colorway: Black / White
- Panel Type: VA
- Curvature: Curved 1500R
- Resolution: 1920 x 1080 (FHD)
- Brightness (nits): 250 cd/m²
- Contrast Ratio: 4000:1
- Refresh Rate: 75Hz
- Response Time: 1ms (MPRT) / 5ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB: 97.7% (CIE 1976)
- Display Colors: 16.7M
- Color Bit: 8 bits
- I/O: 1x HDMI (1.4b), 1x D-Sub (VGA), 1x Headphone-out
- Speaker: 2x 2W
- Adjustment: -3.5° - 21.5° (Tilt)
- VESA Mounting: 100 x 100 mm
- Dimension (W x D x H): 610.34 x 237 x 454.8 mm (24.03 x 9.33 x 17.91 inch)
- Note: HDMI: 1920 x 1080 (Up to 75Hz), D-Sub: 1920 x 1080 (Up to 60Hz), FreeSync Support



PRO MP242C (23.6")

- Colorway: Black
- Panel Type: VA
- Curvature: Curved 1500R
- Resolution: 1920 x 1080 (FHD)
- Brightness (nits): 250 cd/m²
- Contrast Ratio: 3000:1
- Refresh Rate: 75Hz
- Response Time: 5ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB: 98% (CIE 1976)
- Display Colors: 16.7M
- Color Bit: 8 bits
- I/O: 1x HDMI (1.4), 1x D-Sub (VGA), 1x Line-in, 1x Headphone-out
- Speaker: 2x 2W
- Adjustment: -7° - 22° ±2° (Tilt)
- VESA Mounting: 100 x 100 mm
- Dimension (W x D x H): 539.8 x 203 x 414.1 mm (21.25 x 7.99 x 16.30 inch)
- Note: HDMI: 1920 x 1080 (Up to 75Hz), D-Sub: 1920 x 1080 (Up to 60Hz), FreeSync Support



PRO MP241CA / W (23.6")

- Colorway: Black / White
- Panel Type: VA
- Curvature: Curved 1500R
- Resolution: 1920 x 1080 (FHD)
- Brightness (nits): 250 cd/m²
- Contrast Ratio: 3000:1
- Refresh Rate: 75Hz
- Response Time: 1ms (MPRT) / 5ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB: 114.44% (CIE 1976)
- Display Colors: 16.7M
- Color Bit: 8 bits
- I/O: 1x DP (1.2a), 1x HDMI (1.4b), 1x Headphone-out
- Speaker: 2x 2W
- Adjustment: -7° - 22° (Tilt)
- VESA Mounting: 100 x 100 mm
- Dimension (W x D x H): 539.8 x 203 x 414.1 mm (21.25 x 7.99 x 16.30 inch)
- Note: HDMI: 1920 x 1080 (Up to 75Hz), DP: 1920 x 1080 (Up to 75Hz), FreeSync Support



PRO MP273QP (27")

- Colorway: Black
 - Curvature: Flat
 - Resolution: 2560x1440 (WQHD)
 - Brightness (nits): 250 cd/m2
 - Contrast Ratio: 1000:1
 - Refresh Rate: 75Hz
 - Response Time: 4ms (GTG)
 - View Angles: 178°(H) / 178°(V)
 - sRGB: 102%(CIE1976)
 - Display Colors: 16.7M
 - Color Bit: 8 bits
- I/O: 1x DisplayPort (1.2a) 1x HDMI (1.4) 1x Headphone-out
 - Speaker: 2x 2W
 - Adjustment: -5° - 20° (Tilt) -30° - 30° (Swivel) -90° - 90° (Pivot) 0 - 110mm (Height)
 - VESA Mounting: 75 x 75 mm
 - Dimension (W x D x H): 613.50 x 200.80 x 413.40 mm (24.15 x 7.90 x 16.28 inch)
 - Note: 2560 x 1440 (Up to 75Hz) DisplayPort: 2560 x 1440



PRO MP273QV (27")

- Colorway: Black / White
- Curvature: Flat
- Resolution: 2560 x 1440 (FHD)
- Brightness (nits): 250 cd/m2
- Contrast Ratio: 4000:1
- Refresh Rate: 75Hz
- Response Time: 1ms (MPRT) / 4ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB: 92%
- Display Colors: 16.7M
- Color Bit: 8 bits
- I/O: 1x DisplayPort (1.2a) 1x HDMI (1.4) 1x Headphone-out
- Speaker: 2x 2W
- Adjustment: -5° - 20° (Tilt)
- VESA Mounting: 75 x 75 mm
- Dimension (W x D x H): 687 x 119 x 458 mm (27.05 x 4.69 x 18.03 inch)
- Note: HDMI: 2560 x 1440 (Up to 75Hz) DisplayPort: 2560 x 1440 (Up to 75Hz)

PRO MP273 / W / P (27") / PRO MP243 / W / P (23.8")



- Colorway: Black
- Curvature: Flat
- Resolution: 1920 x 1080 (FHD)
- Brightness (nits): 250 cd/m2
- Contrast Ratio: 1000:1
- Refresh Rate: 75Hz
- Response Time: 5ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB: [PRO MP273 / W / P] 100% (CIE 1976) [PRO MP243 / W / P] 99.08% (CIE 1976)
- Display Colors: 16.7M
- Color Bit: 8 bits (6 bits + Hi-FRC)
- I/O: 1x HDMI (1.4) 1x D-Sub (VGA) 1x Mic-in 1x Headphone-out
- Speaker: 2x 2W
- Adjustment: [PRO MP273 / W / P] -5° - 20° (Tilt) [PRO MP273P / 243P] -5° - 20° (Tilt) -30° - 30° (Swivel) -90° - 90° (Pivot) 0 - 110mm (Height)
- VESA Mounting: 75 x 75 mm
- Dimension (W x D x H): [PRO MP273 / W] 613.50 x 181.10 x 462.60 mm (24.15 x 7.13 x 18.21 inch) [PRO MP273P] 613.50 x 200.80 x 413.40 mm (24.15 x 7.91 x 16.28 inch) [PRO MP243 / W] 541.93 x 182.16 x 421.79 mm (21.34 x 7.17 x 16.61 inch) [PRO MP243P] 541.93 x 200.8 x 501.89 mm (21.34 x 7.91 x 19.76 inch)
- Note: HDMI: 1920 x 1080 (Up to 75Hz) DisplayPort: 1920 x 1080 (Up to 75Hz) Energy Star 8.0 FreeSync Support



PRO MP161 (15.6")

- Colorway: Silver Gray
- Curvature: Flat
- Resolution: 1920 x 1080 (FHD)
- Brightness (nits): 250 cd/m2
- Contrast Ratio: 600:1
- Refresh Rate: 60Hz
- Response Time: 4ms (GTG)
- View Angles: 170°(H) / 170°(V)
- Display Colors: 262K
- Color Bit: 6 bits
- I/O: 1x Mini-HDMI (2.0b) 2x Type-C (DP 1.2a signal with Alt mode & 15W Power Delivery / Power Input)
- Speaker: 2x 1.5W
- Adjustment: -0° - 180°
- VESA Mounting: N/A
- Dimension (W x D x H): TBD
- Note: HDMI: 1920 x 1080 (Up to 60Hz) Type C: 1920 x 1080 (Up to 60Hz)



PRO MP271 / P (27")

- Colorway: Black
- Curvature: Flat
- Resolution: 1920 x 1080 (FHD)
- Brightness (nits): 250 cd/m2
- Contrast Ratio: 1000:1
- Refresh Rate: 75Hz
- Response Time: 5ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB: 93.1% (CIE 1976)
- Display Colors: 16.7M
- Color Bit: 8 bits (6 bits + Hi-FRC)
- I/O: 1x HDMI (1.4) 1x D-Sub (VGA) 1x Mic-in 1x Headphone-out
- Speaker: 2x 2W
- Adjustment: [PRO MP271] -5° - 23° (Tilt) [PRO MP271P] -8° - 20° (Tilt) -30° - 30° (Swivel) -90° - 90° (Pivot) 0 - 120mm (Height)
- VESA Mounting: 100 x 100 mm
- Dimension (W x D x H): [PRO MP271] 612.6 x 219.7 x 456.8 mm (24.12 x 8.65 x 17.98 inch) [PRO MP271P] 612.6 x 228.9 x 405.4 mm (24.12 x 9.01 x 15.96 inch)
- Note: HDMI: 1920 x 1080 (Up to 75Hz) DisplayPort: 1920 x 1080 (Up to 75Hz) Energy Star 8.0



PRO MP242 / V / P (23.8")

- Colorway: Black
- Curvature: Flat
- Resolution: 1920 x 1080 (FHD)
- Brightness (nits): 250 cd/m2
- Contrast Ratio: 1000:1
- Refresh Rate: 75Hz
- Response Time: 5ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB: 99.1% (CIE 1976)
- Display Colors: 16.7M
- Color Bit: 8 bits (6 bits + Hi-FRC)
- I/O: 1x HDMI (1.4) 1x D-Sub (VGA) 1x Mic-in 1x Headphone-out
- Speaker: 2x 2W
- Adjustment: [PRO MP242] -5° - 23° (Tilt) [PRO MP242V] -3° - 21° (Tilt) [PRO MP242P] -8° - 20° (Tilt) -30° - 30° (Swivel) -90° - 90° (Pivot) 0 - 120mm (Height)
- VESA Mounting: 100 x 100 mm
- Dimension (W x D x H): [PRO MP242] 539.5 x 219.7 x 405.9 mm (21.24 x 8.65 x 15.98 inch) [PRO MP242V] 539.5 x 205.7 x 402.7 mm (21.24 x 8.10 x 15.85 inch) [PRO MP242P] 539.5 x 228.9 x 385.7 mm (21.24 x 9.01 x 15.19 inch)
- Note: HDMI: 1920 x 1080 (Up to 75Hz) D-Sub: 1920 x 1080 (Up to 60Hz) Energy Star 8.0



PRO MP241X (23.8")

- Colorway: Black
- Curvature: Flat
- Resolution: 1920 x 1080 (FHD)
- Brightness (nits): 250 cd/m2
- Contrast Ratio: 3000:1
- Refresh Rate: 75Hz
- Response Time: 4ms (GTG)
- View Angles: 178°(H) / 178°(V)
- sRGB: 105% (CIE 1976)
- Display Colors: 16.7M
- Color Bit: 8 bits
- I/O: 1x HDMI (1.4) 1x D-Sub (VGA)
- Speaker: NA
- Adjustment: -5° - 15° (Tilt)
- VESA Mounting: 75 x 75 mm
- Dimension (W x D x H): 616 x 125 x 409 mm (24.25 x 4.92 x 16.10 inch)
- Note: HDMI: 1920 x 1080 (Up to 75Hz) D-Sub: 1920 x 1080 (Up to 60Hz)

Modern-Series Monitor PRO-Series Desktop



PRO DP21 11MA

MD271CPW

MD241PW