


Cat.6A 24-Port Patch-Panel 19"/1U

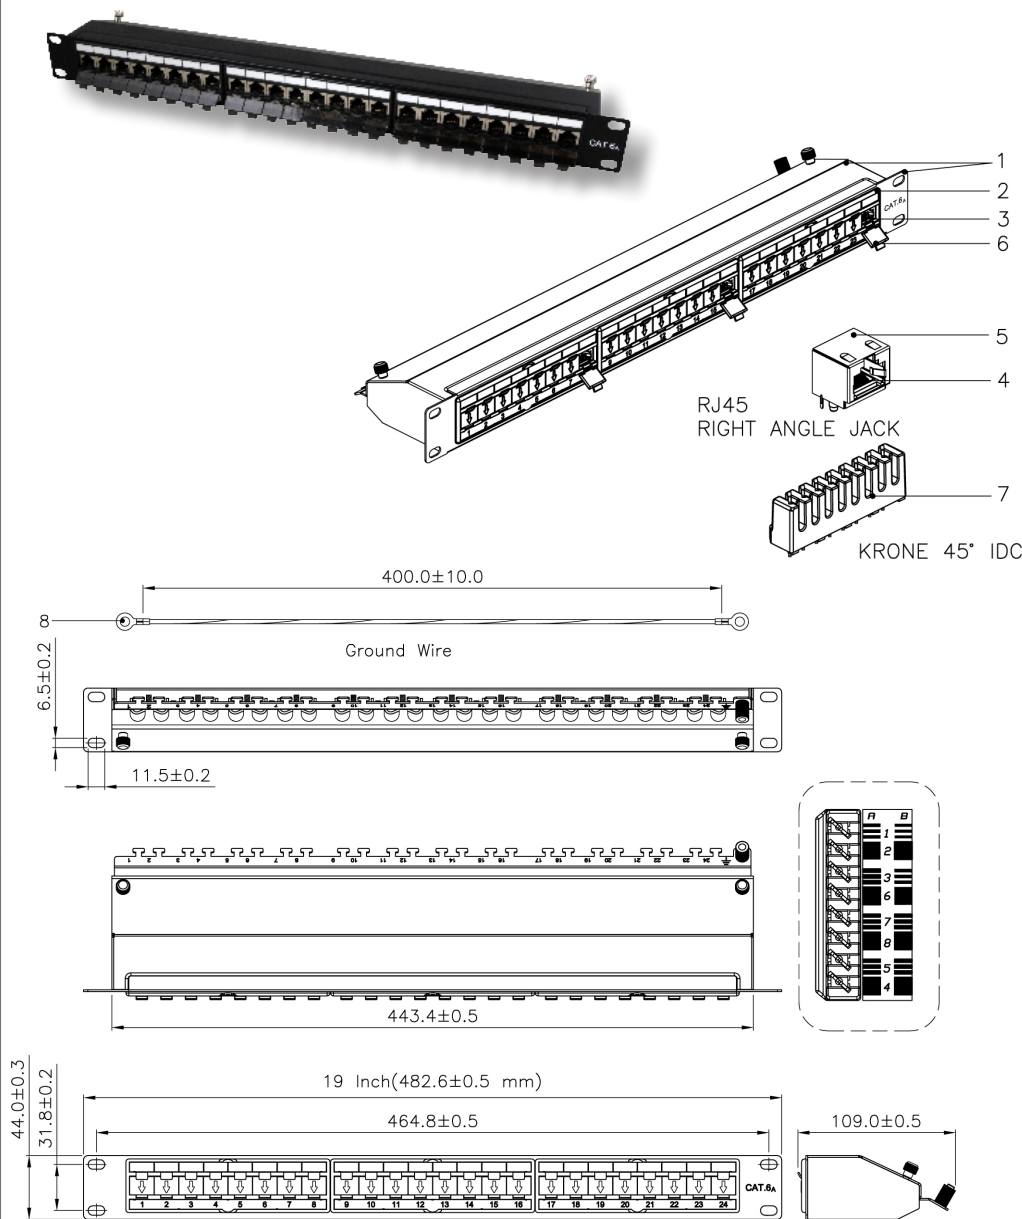

Art.No.	Type
37656.1	24-Port Cat.6A

- Cat.6A TIA 568-B.2-10 10Gbit Ethernet Performance
- 24 x fully shielded RJ45 jacks
- Metal housing RAL9005, black
- 8pol. IDC terminals
- Colour code TIA 568 A/B

Technical data	
Insertion force	<= 30N
Contact durability (RJ45 side)	>= 750
Retention strength (jack/plug)	7.7 kg
Panel Housing material	SECC, 1.2 mm
Jack material	PBT+Glass fiber, UL94-0
Contact area (jack)	50 µ" Gold
PCB	FR4, UL94-0
IDC housing	PC + Glass fiber, UL94-2
IDC terminal	Phosphor bronze with tin plated
Ground wire	AWG 18, with green/yellow striped colour
max. AWG for IDC	AWG 26-22
Operating temperature	-10°C ~ + 60°C
Identification	I.D. Plate: PVC, Transparent colour Paper I.D. bracket : ABS, UL94V-0

RoHS
compliant

Created BT	Date 23.11.11	Cat.6A 24-Port Patchpanel 19" / 1U 37656.1	File: 37656.1_eng
Last rev. BT	Date 30.11.11		