

Residual current operated circuit breaker, 4-pole, type F, short-time delayed, In: 40 A, 30 mA, Un AC: 400 V



Model	
product brand name	SENTRON
product designation	RCCB
design of the product	Short-time delayed
General technical data	
number of poles	4
size of installation devices / acc. to DIN 43880	1
mechanical service life (switching cycles) / typical	10 000
short-circuit current / of series fuse / maximum permissible	100 A
short-circuit current rating	10 kA
switching function / short-term delayed	Yes
overvoltage category	III
Supply voltage	
operational current / at AC / rated value	40 A
<ul style="list-style-type: none"> supply voltage / at AC / rated value 	400 V
<ul style="list-style-type: none"> supply voltage / for testing equipment / minimum 	195 V

supply voltage frequency	
<ul style="list-style-type: none"> • rated value 	50 Hz
Protection class	
protection class IP	IP20, if the distribution board is installed, with connected conductors
Switching capacity	
switching capacity current	
<ul style="list-style-type: none"> • acc. to EN 60898 / rated value • according to IEC 61008-1 / rated value 	0.8 kA 0.8 kA
Dissipation	
power loss [W]	
<ul style="list-style-type: none"> • for rated value of the current / at AC / in hot operating state / per pole • maximum 	1.8 W 5.4 W
Current	
tripping fault current / rated value	30 mA
residual current type	F
let-through current / permissible	5 200 kA
I ² t value / permissible	58 000 A ² ·s
surge current resistance / rated value	3 kA
operational current	
<ul style="list-style-type: none"> • at 40 °C / rated value • at 45 °C / rated value • at 50 °C / rated value • at 55 °C / rated value • at 60 °C / rated value • at 65 °C / rated value • at 70 °C / rated value 	40 A 40 A 40 A 40 A 40 A 40 A 40 A
Product details	
product feature / silicon-free	Yes
product extension / installable / supplementary devices	Yes
Connections	
connectable conductor cross-section / solid	
<ul style="list-style-type: none"> • minimum • maximum 	0.75 mm ² 35 mm ²
connectable conductor cross-section / stranded	
<ul style="list-style-type: none"> • minimum • maximum 	0.75 mm ² 35 mm ²
tightening torque / with screw-type terminals	

<ul style="list-style-type: none"> • minimum 	2.5 N·m
<ul style="list-style-type: none"> • maximum 	3 N·m
position / of power supply cord	top or bottom

Mechanical Design

height	90 mm
width	72 mm
depth	70 mm
installation depth	70 mm
number of modular width units	4
fastening method	DIN rail (REG)
mounting position	any
net weight	350 g

Environmental conditions

ambient temperature / during operation	
<ul style="list-style-type: none"> • minimum 	-25 °C
<ul style="list-style-type: none"> • maximum 	45 °C
ambient temperature / during storage	
<ul style="list-style-type: none"> • minimum permissible 	-40 °C
<ul style="list-style-type: none"> • maximum permissible 	75 °C
number of test cycles / for environmental testing / acc. to IEC 60068-2-30	28

Certificates

reference code	
<ul style="list-style-type: none"> • acc. to DIN EN 61346-2 	F
<ul style="list-style-type: none"> • acc. to IEC 81346-2 	F

General Product Approval	Declaration of Conformity	other	Railway
--------------------------	---------------------------	-------	---------



[Miscellaneous](#)



[Miscellaneous](#)

[Vibration and Shock](#)

Railway

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SV3344-3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SV3344-3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SV3344-3


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

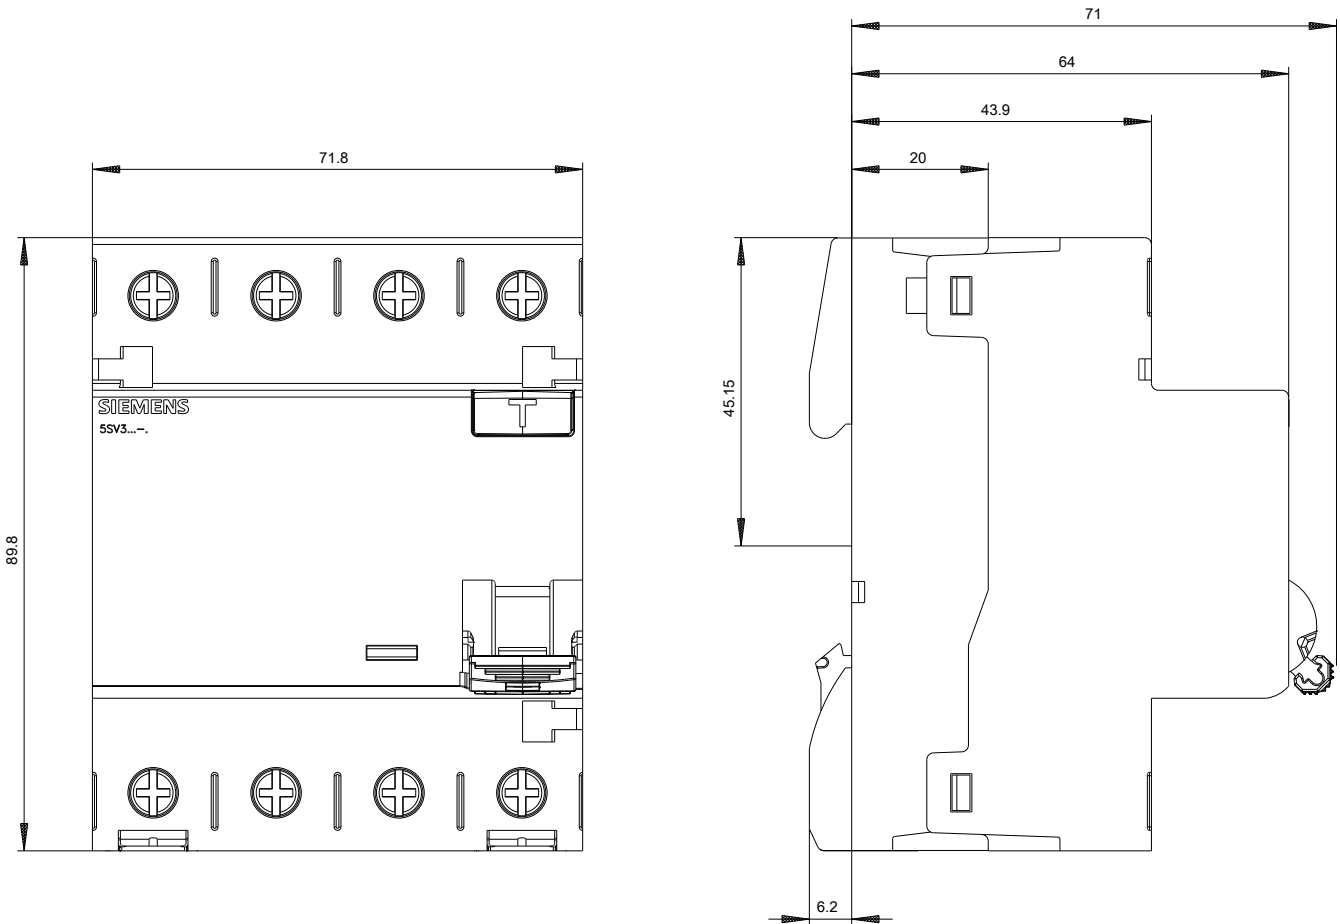

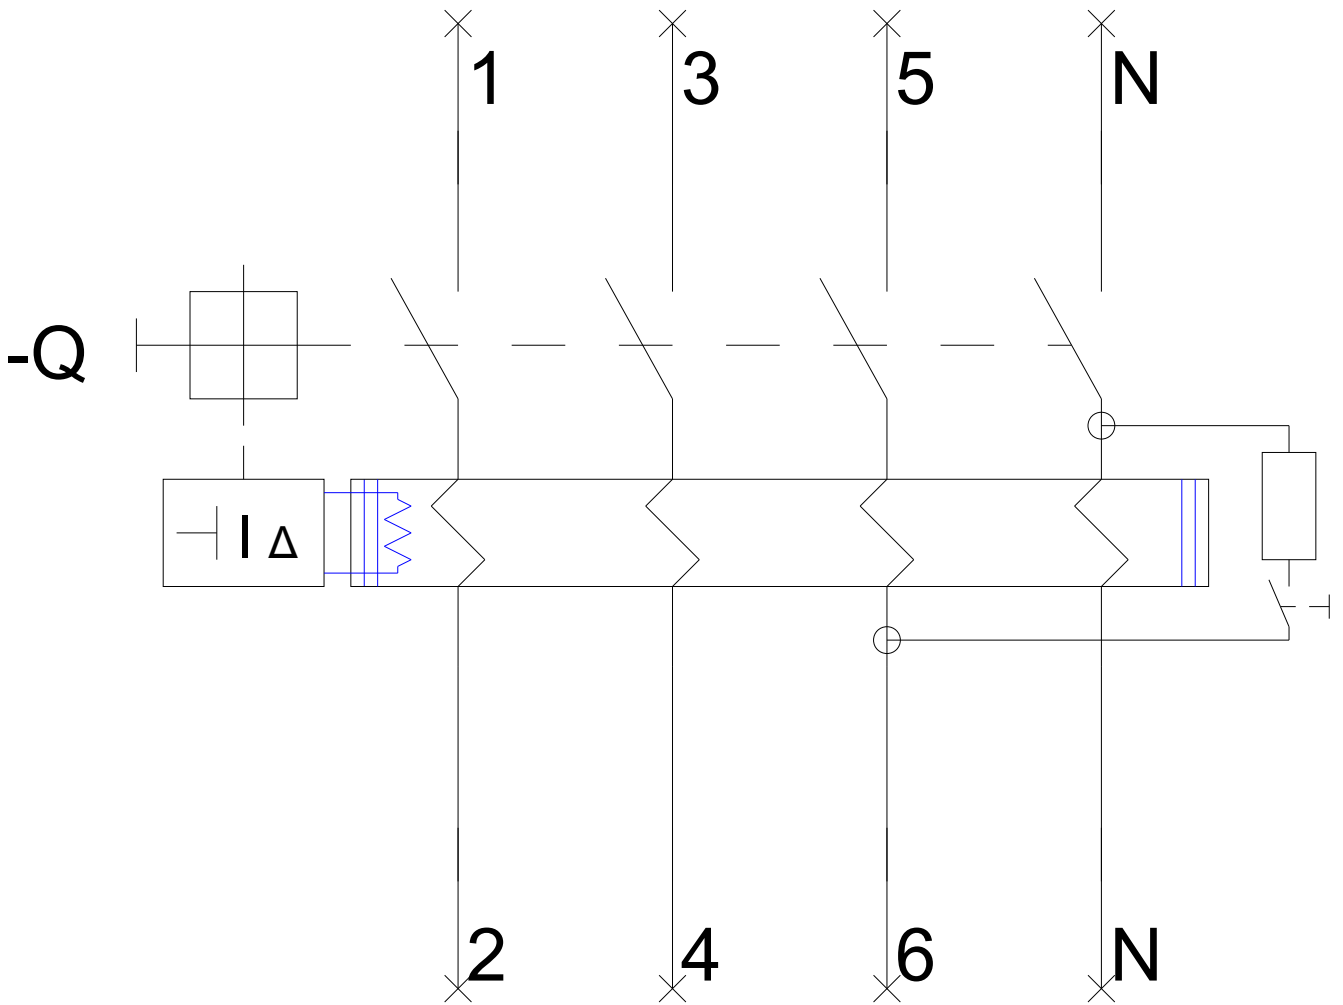

-CB

