

KPF12WH

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Ducted out or re-circulation possible
Material	Stainless Steel + Painted Material
Type of steel	Brushed
EAN code	8017709261672
Hood width	120 cm



Aesthetics

Aesthetics	Portofino	Serigraphy colour	Black
Colour	White	Logo	Applied

Controls

Control setting	Control knobs	Control knobs	Portofino
No. of controls	2	Controls colour	Steel effect

Programs / Functions

No. of speeds	3
Intensive speed	

Technical Features

			
No. of lights	4	No. of filters	4
Light type	LED	Anti-grease filters	Stainless steel
Light power	4 W	Vent outlet	150 mm
Light colour	4000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	815 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dB(A)]
Speed 1	287	49
Speed 2	389	58
Speed 3	606	67
Intensive speed	777	73

Performance / Energy Label

A*

Annual Efficiency Consumption (AEC_{hood}) 42 KWh/year

Energy efficiency class (EEC) A+

Fluid Dynamic Efficiency (FDE) 36,3

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 74,8 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 74,9 %

Grease Filtering Efficiency Class (GFEC) D

Air flow at minumum speed (Q_{min}) 287 m³/h

Maximum extraction rate 606 m³/h

Intensive extraction rate 777 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPE_{min}) 49 dB(A)

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE_{max}) 67 dB(A)

Airbourne acoustical A-weighted sound power emission at boost speed (SPE_{boost}) 73 dB(A)

Time increase factor (F) 0,7

Energy Efficiency Index per first cavity 41,4

Measured air flow rate at best efficiency point (Q_{bep}) 400 m³/h

Measured air pressure at best efficiency point (Q_{bep}) 490 Pa

Measured electric power input at best efficiency point (W_{bep}) 150 W

Normal Power of the light system (W_l) 4 W

Average illumination of the light on the cooking surface (E_{middle}) 329 lux

Sound power level at highest setting (L_{wa}) 67 dB(A)

Electrical Connection

Nominal power 280 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Power supply cable length 1000 mm


Also available

Alternative colours
available

Black, Stainless steel, Red,
Turquoise

Available colours

KPF12BL/X/RD/T

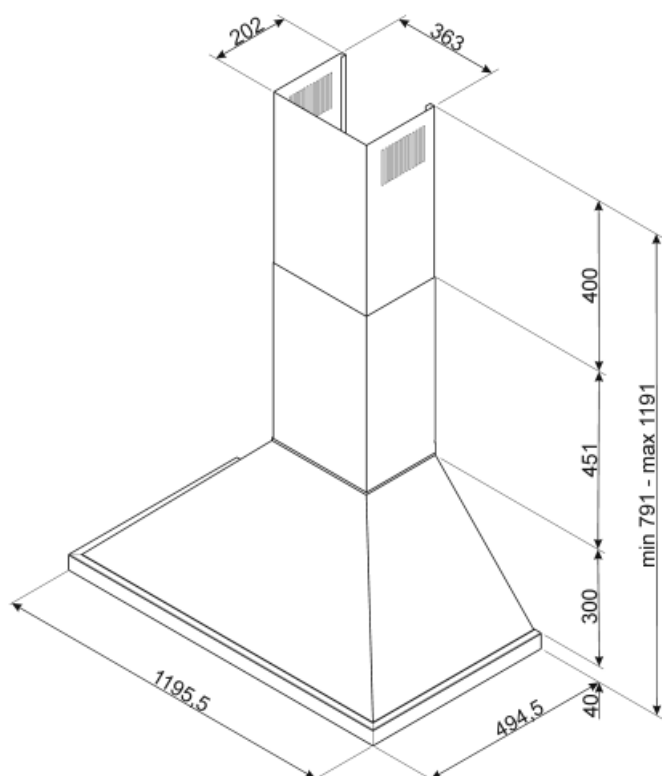

Not included accessories



FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.