




Delock Converter M.2 Key A+E male > 1 x Mini PCIe Slot half size / full size with flexible cable

Description

This converter by Delock changes the M.2 key A or key E interface into a Mini PCIe interface. Different Mini PCIe modules with USB and PCIe signals can be inserted in the converter. On the M.2 key A or key E interface can be used e.g. WLAN, Bluetooth, GNSS, 3G, HSPA and NFC modules. Further it is possible to use both functions of a module which has e.g. WLAN and Bluetooth.

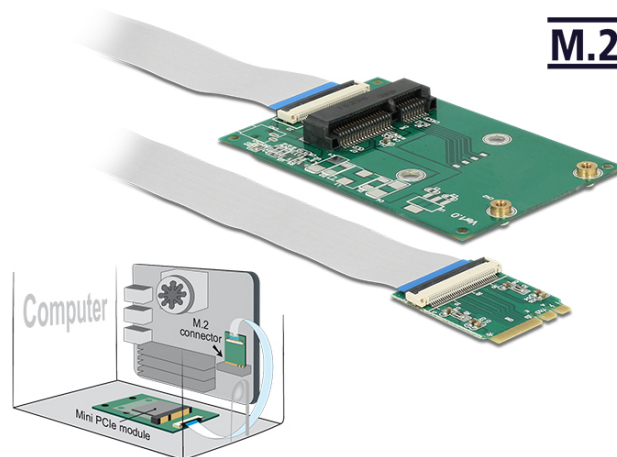

Specification

- Connector:
 - 1 x 59 pin M.2 key A+E male >
 - 1 x Mini PCIe slot
- PCI Express Rev. 1.1
- Interface: PCIe + USB
- Form factor M.2: 2230
- Form factor Mini PCIe: half size and full size
- Suitable for M.2 slot with key A or key E based on PCIe and USB
- Operating temperature: 0 °C ~ 80 °C
- Dimensions (LxWxH):
 - M.2 board: ca. 30 x 22 x 3 mm
 - Mini PCIe board: ca. 69 x 45 x 6 mm
- OS independent, no driver installation necessary

System requirements

- One free M.2 key A or key E slot

Package content

- Converter board M.2
- Mini PCIe board
- 3 x flat cable, length ca.: 1 x 10 cm, 1 x 20 cm, 1 x 30 cm
- Screws
- User manual

Item no. 62848



EAN: 4043619628483

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images





General

Form factor:	M.2 2230
	MiniPCle full size
	MiniPCle half size
Supported operating system:	OS independent, no driver installation necessary
Slot:	PCle
	USB

Interface

Connector 1:	1 x 59 pin M.2 key A+E male
Connector 2:	1 x Mini PCle slot