


Radio control dimmer  
ZigBee Light Link control element  
2gang

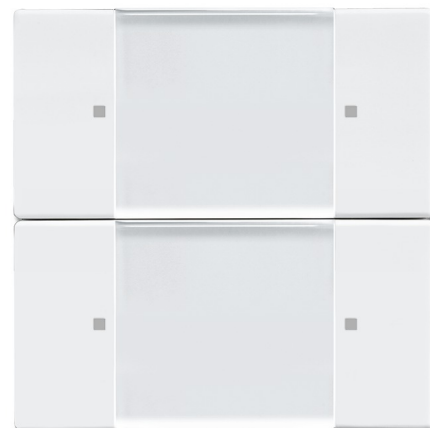

For wireless switching and dimming of electrical loads.

For ZigBee Light Link flush-mounted inserts 6710 U, 6711 U and 6715 U.

In connection with the ZigBee Light Link flush-mounted inserts 6711 U and 6715 U the top rocker is used to switch or dim the non-ZLL lamps connected to the flush-mounted insert directly. In the case of 6736 and 6737, the other keys can be used for saving, calling and dimming lightscenes.

In combination with the ZigBee LightLink-UP insert 6710 U for storing and calling up 4 light scenes or dimming 2 light scenes.

For combining with/integrating in other systems which operate with the ZigBee Light Link protocol, such as Philips hue.

With labelling field.

Without enclosed labelling sheet.

Compatible lettering software is available at [www.busch-jaeger-labelingtool.com](http://www.busch-jaeger-labelingtool.com).

Send/receive frequency: 2.4 GHz.

Free-field range: approx. 100 m.

Protection class (Device): IP 20, Temperature range (Device): -5 °C to 45 °C,

Dimensions: (L x W x D): 64 mm x 64 mm x 18 mm,

Order Code : 2CKA006730A0074

Article No. : 6736-84

EAN: 4011395189306