

KERN EFC60K-3L

Plattformwaage für schnelles, unkompliziertes Kontrollwiegen, Zählen, Checkweighing Anwendungen und vieles mehr



Display

Display digit height (large):	5,200 cm
Display digit height (small):	5,200 cm

Counting

Counting resolution:	24000
Minimum piece weight at piece counting (Laboratory):	2,500 g
Minimum piece weight at piece counting (Normal):	25 g

Functions

Counting function:	yes
Vibration-free weighing (Animal weighing program):	yes
Weighing with tolerance range:	yes

Environmental conditions

Maximum humidity:	80 %
Maximum operating temperature:	40 °C
Minimum ambient temperature:	-10 °C
Minimum humidity:	0 %

Power supply

Input voltage:	100 V - 240 V 50 / 60 Hz
Mains adapter:	Mains adapter external
Mains adapter/adapter included:	EURO UK

Services (optional)

Adjustment at the location of installation: 961-249

DAkkS Certificate:	963-129
--------------------	---------

Category

Brand:	KERN
Category:	Balances
Product Group:	Platform scale

Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	880 x 490 x 160 mm
Gross weight:	12,700 kg
Net weight:	10,500 kg
Shipping method:	Parcel service
UN number:	ERRO

Construction

Cable length of display device:	3 m
Dimensions of display device (WxDxH):	252 x 162 x 57 mm

Measuring system

Adjustment options:	External calibration
Eccentric loading at 1/3 [Max]:	15 g
Linearisation (points):	3
Linearity:	10 g
Load cell connection:	4-wire
Readability [d]:	5 g
Recommended adjusting weight:	50 kg (F2)
Repeatability:	1 g 2 g
Resolution:	12000
Stabilisation time under laboratory conditions:	2 s
Warm up time:	30 min
Weighing capacity [Max]:	60 kg
Weighing system:	Strain gauge
Weighing units:	g lb oz kg PCS

KERN EFC 60K-3L



Plattformwaage für schnelles, unkompliziertes Kontrollwiegen, Zählen, Checkweighing Anwendungen und vieles mehr

Dimensions of weighing plate (WxDxH): 500 x 400 x 120 mm

of stand: 33 cm

Level indicator: yes

Material weighing plate: stainless steel


Revolving screw feet: yes

Wall mount: yes

Weighing surface (WxD): 500 x 400 mm

Piktogramme

STANDARD

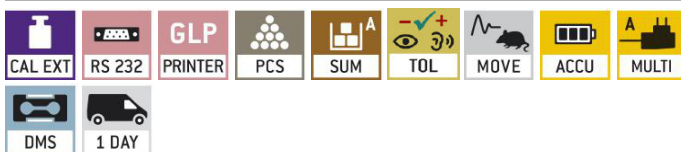

OPTION

