thermaltake

CHASSIS COLLECTION

thermaltake

Contents

New Releases
DistroCase™ 350P — 03
Core P8 TG — 05
AH T600 / AH T600 Snow — 07
AH T200 / AH T200 Snow — 09
View 51 TG ARGB / View 51 TG Snow ARGB — 11
Divider 300 TG ARGB — 13
The Tower 100 / The Tower 100 Snow — 15
V250 TG ARGB — 17
V150 TG — 19
Commander G31 / G32 / G33 TG ARGB — 21
S100 TG / S100 TG Snow — 23

Level 20 Series
Level 20 HT / Level 20 HT Snow — 31
Level 20 RS ARGB — 33
Level 20 — 35
Level 20 GT RGB Plus — 37
Level 20 GT ARGB — 39
Level 20 GT ARGB Black Edition — 41
Level 20 MT ARGB — 43
Level 20 XT — 45
Level 20 VT — 47

A Series
A700 Aluminum TG — 55
A500 Aluminum TG — 57

S Series
S500 TG / S500 TG Snow — 59
S300 TG / S300 TG Snow — 61

Core Series
Core P7 TG — 65
Core P90 TG — 65
Core P5 TG V2 Black Edition — 66
Core P5 TG Ti — 66
Core P3 TG — 67
Core P1 TG — 67

View Series
View 91 TG RGB Plus — 71
View 71 TG ARGB — 72
View 71 TG RGB Plus — 72
View 31 TG ARGB — 73
View 37 ARGB — 73
View 23 TG ARGB — 74
View 21 TG RGB — 74

Game With Your TT MOD

Download on the App Store

Android app on Google play

Learn More

thermaltake RGB PLUS

thermaltake

WHAT IS TT RGB PLUS ECOSYSTEM?

SyncALL, Say “Hello TT”

TT RGB PLUS Ecosystem is the intelligent lighting system for PCs that combines the most advanced addressable LED lighting with Thermaltake’s patented TT RGB PLUS Software. TT RGB PLUS ecosystem provides nearly unlimited possibilities for playing with colors, synchronizing lights to games, music, CPU temperatures or other TT RGB PLUS products, including case fans, CPU/VGA waterblocks, AIO CPU coolers, PSUs, LED strips and peripherals. The patented software allows users to change the light modes, colors, speeds, brightness, fan speeds, and even supports AI voice control in iOS and Android devices.

DistroCase™ 350P

DistroCase™ 350P

Mid Tower Chassis

- Crystal clear PMMA
- One Tempered Glass panel
- 16.8m RGB colors support with TT RGB Plus system
- Two lighting strip with total 48 LEDs
- Supports synchronization with ASUS, GIGABYTE, MSI, and ASRock motherboards
- D5 pump preinstalled

Core P8 TG

Core P8 TG

Full Tower Chassis

- Two-way installation style
- Three Tempered Glass panels
- Transformed to open frame chassis once removed the TG panels
- 120mm fan x 18 (without reservoir &pump)
- Include riser cable and GPU bracket

AH T600
AH T600 Snow

AH T600
AH T600 Snow

Full Tower Chassis

- Air-force styled architectur open frame case in Black and Snow
- Support up to E-ATX(up to 10.5'' wide) motherboard
- Two Tempered Glass panels and three tempered glass at front panel for outstanding view
- Support up to Ten 120mm fans or Seven 140mm fans for cooling efficiency

AH T200
AH T200 Snow

AH T200
AH T200 Snow

Micro Chassis

- Air-force styled architecture open frame case to support Micro ATX
- Tempered glass swing panels on both left and right
- Supports up to 240/280mm radiator at front
- Supports up to two 120mm or 140mm fans on top
- One Type-C & two USB 3.0

View 51 TG ARGB
View 51 TG Snow ARGB

View 51 TG ARGB
View 51 TG Snow ARGB

Full Tower Chassis

- Three 4mm Tempered Glass panels
- Two preinstalled 200mm ARGB Fan at front and one 120mm ARGB Fan at rear
- DUAL-CHAMBER layout
  -one for cooling product
  -one for cable routing, PSU mounting
- Supports synchronization with ASUS, GIGABYTE, MSI, and ASRock motherboards

Divider 300 TG ARGB

Divider 300 TG ARGB

Mid Tower Chassis

- Mid Tower case support E-ATX
- Left side panel is combined with steel and Tempered Glass, split diagonally
- Three preinstalled 120mm ARGB fans
- Patented PCI-E slots design
- Supports up to 360mm radiator at front and 240mm at right side if M/B

Tempered Glass

Modular Ready

The Tower 100
The Tower 100 Snow

The Tower 100
The Tower 100 Snow

Mini Chassis

- Mid Tower case support E-ATX
- Left side panel is combined with steel and Tempered Glass, split diagonally
- Three preinstalled 120mm ARGB fans
- Patented PCI-E slots design
- Supports up to 360mm radiator at front and 240mm at right side if M/B

Tempered Glass

Modular Ready

V250 TG ARGB

V250 TG ARGB

Mid Tower Chassis

- Budget-friendly ARGB case
- Three preinstalled 120mm ARGB fans at the front and one standard fan at rear
- Power cover included
- RGB switch on top-front I/O port
- Supports synchronization with ASUS, GIGABYTE, MSI, and ASRock motherboards

Tempered Glass

V150 TG

V150 TG

Micro Chassis

- Compact design to support Micro ATX
- Two Tempered Glass windows (front & left)
- One preinstalled 120mm standard rear fan
- Support up to 280mm radiator at front
- Magnetic fan filter at top and removable fan filter at bottom

Tempered Glass

Commander
G31 / G32 / G33 TG ARGB

Commander
G31 / G32 / G33 TG ARGB

Mid Tower Chassis

- Built-in one 200mm ARGB Fan at front and one 120mm standard fan at rear
- Support up to two 200mm fans at the front
- RGB switch on top-front I/O port
- One Tempered Glass panel
- Power cover included

S100 TG
S100 TG Snow

S100 TG
S100 TG Snow

Micro Chassis

- Sleek and elegant steel Micro Chassis in black and snow version
- Support Micro-ATX motherboard
- One preinstalled 120mm standard fan at the rear
- One Tempered Glass hinge door
- Support one 200mm fan at top

Tempered Glass

DistroCase™ 350P

Case Type	Mid Tower
Dimension (H*W*D)	567 x 333 x 490mm (22.32 x 13.1 x 19.3 inch)
Side Panel	5mm Tempered Glass x 1
Drive Bays - Accessible - Hidden	1 x 2.5" 2 x 3.5" or 4 x 2.5"
Expansion Slots	6
Motherboard	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)
I/O Port	USB 3.0 x 2, USB 2.0 x 2, HD Audio x 1
PSU	Standard PS2 PSU
Radiator Support	**Front:** 1 x 360mm 1 x 280mm **Left Side:** 1 x 360mm
Clearance	CPU cooler height limitation: 130mm VGA length limitation: 320mm (With Reservoir & Radiator) PSU length limitation: 200mm
P/N	CA-1Q8-00M1WN-00

Core P8 TG

Case Type	Full Tower
Dimension (H*W*D)	626 x 260 x 660mm (24.65 x 10.24 x 26 inch)
Side Panel	4mm Tempered Glass x 3
Drive Bays - Accessible - Hidden	1 x 2.5'' (with Pump Bracket) 3 x 3.5'' or 6 x 2.5'' (With HDD Bracket)
Expansion Slots	8
Motherboard	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX), 12" x 13"(E-ATX)
I/O Port	1 x Type-C, 2 x USB 3.0, x 2 USB 2.0, 1 x HD Audio
Fan Support	**Front:** 4 x 120mm , 3 x 140mm **Top:** 4 x 120mm, x 140mm **Rear:** 2 x 120mm, **Right:** 4 x 120mm, 3 x 140mm **Bottom:** 4 x 120mm, 3 x140mm
PSU	Standard PS2 PSU
Radiator Support	**Front:** 1 x 480mm, 1 x 420mm **Top:** 1 x 360mm, 1 x 420mm, **Right:** 1 x 480mm, 1 x 420mm **Bottom:** 1 x 240mm (With P5 DP-D5)
Clearance	CPU cooler height limitation: 180mm VGA length limitation: 280mm (With Reservoir) 320mm (Without Reservoir) PSU length limitation: 200mm
P/N	CA-1Q2-00M1WN-00

AH T600
AH T600 Snow

Case Type	Full Tower
Dimension (H*W*D)	628.3 x 337 x 763mm (27.74 x 13.3 x 30 inch)
Side Panel	5mm Tempered Glass x 2
Drive Bays - Accessible - Hidden	2 x 3.5" or 3 x 2.5" -
Expansion Slots	8
Motherboard	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX), 12" x 10.5" (E-ATX)
I/O Port	Type-C x 1, USB 3.0 x 2, USB 2.0 x 1, HD Audio x 1
Fan Support	**Front:** 4 x 120mm, 3 x 140mm **Top:** 3 x 120mm, 2 x 140mm **Right:** 3 x 120mm, 2 x 140mm
PSU	Standard PS2 PSU
Radiator Support	**Front:** 4 x 120mm, 3 x 140mm **Top:** 3 x 120mm, 2 x 140mm **Right:** 3 x 120mm, 2 x 140mm
Clearance	CPU cooler height limitation: 195mm VGA length limitation: 300mm (With Water Pump) 440mm (Without Water Pump) PSU length limitation: 200mm
P/N	TG: CA-1Q4-00M1WN-00 Snow: CA-1Q4-00M6WN-00

AH T200
AH T200 Snow

Case Type	Micro Case
Dimension (H*W*D)	444.2 x 282 x 551.5 mm (17.5 x 11.1 x 21.7 inch)
Side Panel	Tempered Glass x 2
Drive Bays - Accessible - Hidden	2 x 3.5" or 3 x 2.5" -
Expansion Slots	5
Motherboard	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX)
I/O Port	Type-C x 1, USB 3.0 x 2, HD Audio x 1
Fan Support	**Front:** 2 x 120mm or 1 x 120mm 2 x 140mm or 1 x 140mm **Top:** 2 x 120mm or 1 x 120mm 2 x 140mm or 1 x 140mm
PSU	Standard PS2 PSU
Radiator Support	**Front:** 1 x 240mm or 1 x 120mm 1 x 280mm or 1 x 140mm
Clearance	CPU cooler height limitation: 150mm VGA length limitation: 320mm PSU length limitation: 180mm
P/N	TG: CA-1Q4-00M1WN-00 Snow: CA-1Q4-00M6WN-00

View 51 TG ARGB
View 51 TG Snow ARGB

Case Type	Full Tower
Dimension (H*W*D)	550 x 315 x 525mm (21.65 x 12.4 x 20.67 inch)
Side Panel	4mm Tempered Glass x 3
Cooling System	**Front (intake):** 2 x 200 x 200 x 30mm Addressable RGB fan (600rpm, 24dBA) **Rear (exhaust):**1 x 120 x 120 x 25mm Addressable RGB fan (1000rpm, 27.2 dBA)
Drive Bays - Accessible - Hidden	2 x 3.5'' or 2.5'' (With HDD Cage) ; 2 x 2.5'' (With HDD Bracket) -
Expansion Slots	8
Motherboard	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX), 12" x 10.5" (E-ATX)
I/O Port	1 x Type-C, 2 x USB 2.0, 2 x USB 3.0, 1 x HD Audio, 1 x RGB Buttom
PSU	Standard PS2 PSU
Fan Support	**Front:** 3 x 120mm, 3 x 140mm, 2 x 200mm **Top:** 3 x 120mm, 3 x 140mm, 2 x 200mm **Rear:** 1 x 120mm **Right:** 3 x 120mm, 2 x 140mm **Bottom:** 3 x 120mm
Radiator Support	**Front:** 1 x 360mm, 1 x 280mm **Top:** 1 x 360mm, 1 x 280mm **Right:** 1 x 360mm, 1 x 280mm **Bottom:** 1 x 360mm
Clearance	CPU cooler height limitation: 175mm VGA length limitation: 300mm (With Water Pump) 440mm (Without Water Pump) PSU length limitation: 200mm
P/N	TG: CA-1Q6-00M1WN-00 Snow: CA-1Q6-00M6WN-00

Divider 300 TG ARGB

Case Type	Mid Tower
Dimension (H*W*D)	475 x 220 x 445 mm (18.7 x 8.66 x 17.52 inch)
Side Panel	Tempered Glass x 2
Cooling System	-
Drive Bays - Accessible - Hidden	- 2 x 3.5" or 2 x 3.5"; 2 x 2.5"
Expansion Slots	2
Motherboard	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX), 12" x 13"(E-ATX)
I/O Port	1 x Type-C , 2 x USB 3.0, 1 x HD Audio
PSU	Standard PS2 PSU
Fan Support	**Front:** 3 x 120mm or 2 x 120mm or 1 x 120mm 2 x 140mm or 1 x 140mm **Top:** 1 x 120mm, 1 x 140mm **Rear:** 1 x 120mm **Right:** 2 x 120mm
Radiator Support	**Front:** 1 x 360mm or 1 x 240mm or 1 x 120mm 1 x 280mm or 1 x 140mm **Right:** 1 x 240mm
Clearance	CPU cooler height limitation: 170mm VGA length limitation: 270mm (With reservoir) 360mm (Without reservoir) PSU length limitation: 160mm (With HDD Cage) 360mm(Without HDD Cage)
P/N	CA-1S2-00M1WN-00

V250 TG ARGB

Case Type	Mid Tower
Dimension (H*W*D)	430 x 216.5x 477mm (16.9 x 8.52 x 18.78 inch)
Side Panel	4mm Tempered Glass x 1
Cooling System	**Front (intake):** 3 x 120 x 120 x 25mm Addressable RGB fan (1000rpm, 27.2 dBA) **Rear (exhaust):** 1 x 120 x 120 x 25 mm fan (1000rpm, 16dBA)
Drive Bays - Accessible - Hidden	2 x 3.5" or 2 x 2.5" 2 x 2.5"
Expansion Slots	7
Motherboard	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX) 12" x 9.6" (ATX)
I/O Port	USB 3.0 x 1, USB 2.0 x 2, HD Audio x 1, R Button x 1
PSU	Standard PS2 PSU
Fan Support	**Front:** 3 x 120mm, 2 x 140mm **Top:** 2 x 120mm, 2 x 140mm **Rear:** 1 x 120mm
Radiator Support	**Front:** 1 x 360mm, 1 x 280mm **Top:** 1 x 240mm **Rear:** 1 x 120mm
Clearance	CPU cooler height limitation: 160mm VGA length limitation: 320mm PSU length limitation: 160mm (With HDD Rack) 200mm (Without HDD Rack)
P/N	CA-1Q5-00M1WN-00

V150 TG

Case Type	Micro Case
Dimension (H*W*D)	440 x 208 x 398mm (17.32 x 8.19 x 15.67 inch)
Side Panel	4mm Tempered Glass x 2 (Left & Front)
Cooling System	**Rear (exhaust):** 1 x 120 x 120 x 25 mm fan (1000rpm, 16dBA)
Drive Bays - Accessible - Hidden	- 2 x 2.5" ; 2 x 3.5"
Expansion Slots	4
Motherboard	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX)
I/O Port	1 x USB 3.0, 2 x USB 2.0, 1 x HD Audio
PSU	Standard PS2 PSU
Fan Support	**Front:** 2 x 120mm, 2 x 140mm **Top:** 1 x 120mm, 1 x 140mm **Rear:** 1 x 120mm
Radiator Support	**Front:** 1 x 240mm,1 x 280mm **Rear:** 1 x 120mm
Clearance	CPU cooler height limitation: 155mm VGA length limitation: 350mm (Without Front Fan) PSU length limitation: 220mm
P/N	CA-1R1-00S1WN-00

Commander G31 / G32 / G33 TG ARGB

Case Type	Mid Tower
Dimension (H*W*D)	445.57 x 225 x 471mm (17.6 x 8.85 x 18.58 inch)
Side Panel	4mm Tempered Glass x 1
Cooling System	**Front (intake):** 200 x 200 x 30mm ARGB fan x 2 (800rpm, 29.2 dBA) **Rear (exhaust):**120 x 120 x 25mm fan (1000rpm, 16dBA)
Drive Bays - Accessible - Hidden	- 2 x 3.5“ or 2.5” (HDD Rack); 2 x 2.5” (HDD Bracket)
Expansion Slots	7 + 2
Motherboard	6.7” x 6.7” (Mini ITX), 9.6” x 9.6” (Micro ATX) 12” x 9.6” (ATX)
I/O Port	1 x USB 3.0, 2 x USB 2.0, 1 x HD Audio, 1 x RGB Switch
PSU	Standard PS2 PSU
Fan Support	**Front:** 3 x 120mm, 2 x 140mm, 2 x 200mm **Top:** 2 x 120mm, 2 x 140mm **Rear:** 1 x 120mm, 1 x 140mm
Radiator Support	**Front:** 1x 280mm, 1 x 360mm **Top:** 1 x 240mm **Rear:** 1 x 120mm
Clearance	CPU cooler height limitation: 165mm PSU length limitation: 160mm (With HDD Rack) 200mm (Without HDD Rack) VGA length limitation: 300mm VGA width limitation (Vertically): 45mm RAM height limitation: 40mm (With radiator series)
P/N	G31: CA-1P1-00M1WN-00 G32: CA-1P1-00M1WN-00 G33: CA-1P1-00M1WN-00

S100 TG S100 TG Snow

Case Type	Micro Case
Dimension (H*W*D)	411 x 220 x 441mm (16.18 x 8.66 x 17.36 inch)
Side Panel	4mm Tempered Glass x 1
Cooling System	**Rear (exhaust):** 120 x 120 x 25mm fan (1000rpm, 16 dBA)
Drive Bays - Accessible - Hidden	2 x 3.5“ or 2 x 2.5” (HDD Rack) 2 x 2.5” (HDD Bracket)
Expansion Slots	4
Motherboard	6.7” x 6.7” (Mini ITX), 9.6” x 9.6” (Micro ATX)
I/O Port	1 x USB 3.0, 2 x USB 2.0, 1 x HD Audio
PSU	Standard PS2 PSU
Fan Support	**Front:** 2 x 120mm, 2 x 140mm **Top:** 2 x 120mm, 2 x 140mm, 1 x 200mm **Rear:** 1 x 120mm
Radiator Support	Front: 1 x 240mm, 1 x 280mm Top: 1 x 240mm, 1x 280mm Rear: 1 x 120mm
Clearance	CPU cooler height limitation: 165mm PSU length limitation: 160mm VGA length limitation: 330mm
P/N	TG: CA-1Q9-00S1WN-00 Snow: CA-1Q9-00S6WN-00

The Tower 100 The Tower 100 Snow

Case Type	Mini Case
Dimension (H*W*D)	260 x 460 x 260 mm (10.24 x 18.11 x 10.24 inch)
Side Panel	Tempered Glass x 3
Cooling System	-
Drive Bays - Accessible - Hidden	2 x 2.5“; 2 x 2.5” or 2 x 3.5”
Expansion Slots	2
Motherboard	6.7” x 6.7” (Mini ITX)
I/O Port	1 x Type-C, 2 x USB 3.0, 1 x HD Audio
PSU	Standard PS2 PSU
Fan Support	**Front:** 1 x 120mm **Power Cover:** 1 x 120mm, 1 x 140mm
Radiator Support	Top: 1 x 120mm
Clearance	CPU cooler height limitation: 180mm PSU length limitation: 360mm VGA length limitation: 320mm
P/N	TG: CA-1R3-00S1WN-00 Snow: CA-1R3-00S6WN-00

LEVEL 20HT
LEVEL 20HT Snow

Level 20 HT
Level 20 HT Snow

Full Tower Chassis

- Four Tempered Glass windows for stunning views
- Two preinstalled 140mm standard fans on top
- Unique design click-to-open tempered glass panels (front & top)
- Radiator can be installed at the bottom vertically or horizontally
- Capable of supporting dual-loop DIY liquid cooling systems

LEVEL 20 RS ARGB

Level 20 RS ARGB

Mid Tower Chassis

- Inspired by Racing Sports Cars
- Two 4mm Tempered Glass side panels
- Two preinstalled 200mm ARGB Fans at the front,
  one 120mm standard fan at the rear, and one ARGB lighting strip
- ARGB Fans and lighting strip can sync via RGB switch button/motherboards
- Patented Rotational PCI-E 8 slot design supports SLI vertical GPU

LEVEL 20

Celebrate 20th Anniversary

Level 20

Full Tower Chassis

- Three 4mm thick Tempered Glass panels
- Front I/O ports with 4 x USB 3.0 & 1x USB 3.1 Type-C
- Three preinstalled Riing Plus 14 RGB fans
- Sync with Razer Chroma and Amazon Alexa
- Fully modular design
- Chamber concept: divided into three main chambers for ventilation
- Optimized for space management
- Supports up to E-ATX motherboards

LEVEL 20 GT RGB PLUS

Level 20 GT RGB Plus

Full Tower Chassis

- Four 5mm Tempered Glass panels with hinged door design
- Top-Front I/O ports with 2 x USB 3.0 & USB 2.0 & 1 x USB 3.1 Type-C
- Two preinstalled 200mm Riing Plus RGB fans
  & one preinstalled 140mm Riing Plus RGB fan
- Supports up to a total of four 200mm fans
- Sync with Razer Chroma and Amazon Alexa
- Patented Rotational PCI-E 8 slots design support SLI vertical GPU
- Two way radiator placement options (vertical and horizontal)
- Supports E-ATX motherboards

LEVEL 20 GT ARGB

Level 20 GT ARGB

Full Tower Chassis

- Four 5mm Tempered Glass panels with hinged door design
- Top-Front I/O ports with 2 x USB 3.0 & USB 2.0 & 1 x USB 3.1 Type-C
- Two preinstalled 200mm ARGB fans
  & one preinstalled 140mm standard fan
- Supports synchronization with ASUS, GIGABYTE, MSI,
  and ASRock motherboards
- Patented Rotational PCI-E 8 slots design support SLI vertical GPU
- Two way radiator placement options (vertical and horizontal)
- Supports E-ATX motherboards

LEVEL 20 GT ARGB
Black Edition

Level 20 GT ARGB Black Edition

Full Tower Chassis

- Four 5mm Tempered Glass with hinged door design
- Top-Front I/O ports with 2 x USB 3.0 & USB 2.0 & 1 x USB 3.1 Type-C
- Two preinstalled 200mm ARGB front fans
  & One preinstalled 140mm standard rear fan
- Supports synchronization with ASUS, GIGABYTE, MSI,
  and ASRock motherboards
- Patented Rotational PCI-E 8 slots design support SLI vertical GPU

LEVEL 20 MT ARGB

Level 20 MT ARGB

Mid Tower Chassis

- Two 4mm Tempered Glass panels
- Top-Front I/O ports with 2 x USB 3.0 and 1 x RGB switch
- Three preinstalled 120mm ARGB fans
  & one preinstalled 120mm standard fan
- Supports synchronization with ASUS, GIGABYTE, MSI, and ASRock motherboards
- Supports ATX motherboards

Tempered Glass

LEVEL 20 XT

Level 20 XT

E-ATX Cube Chassis

- Four 4mm Tempered Glass panels
- Front I/O ports with 2 x USB 3.0 & USB 2.0 & 1 x USB 3.1 Type-C
- Supports radiator up to 480mm and fans up to four 200mm
- Fully modular design
- Chamber concept: divided into two main chambers for ventilation
- Optimized for space management
- Supports E-ATX motherboards

LEVEL 20 VT

Level 20 VT

Micro Chassis

- Four 4mm Tempered Glass panels
- Front I/O ports with 2 x USB 3.0 & USB 2.0
- One preinstalled 200mm front fan
- Fully modular design
- Chamber concept: divided into two main chambers for ventilation
- Supports M-ATX & ITX motherboards

Level 20 HT

Case Type	Full Tower
Dimension (H*W*D)	613 x 468 x 503mm (24.13 x 18.43 x 19.8 inch)
Side Panel	4mm Tempered Glass x 4 (Left & Right & Front & Top)
Cooling System	**Top (exhaust):** 140 x 140 x 25mm Turbo fan x 2 (1000rpm, 16dBA)
Drive Bays - Accessible - Hidden	4 x 3.5" or 2.5" (With HDD Cage) 1 x 2.5" (With HDD Bracket)
Expansion Slots	8
Motherboards	6.7" x 6.7" (Mini ITX), 9.6: x 9.6" (Micro ATX), 12" x 9.6" (ATX), 12" x 13" (E-ATX)
I/O Port	1 x Type-C, 2 x USB 2.0, 2 x USB 3.0, 1 x HD Audio
Fan Support	**Left Side:** 3 x 120mm, 2 x 140mm **Right Side:** 3 x 120mm, 2 x 140mm **Top:** 2 x 120mm, 2 x 140mm **Rear:** 2 x 120mm, 2 x 140mm **Bottom:** 3 x 120mm
Radiator Support	**Left / Right Side:** 1 x 360mm, 1 x 280mm **Bottom:** 1 x 360mm
Clearance	CPU cooler height limitation: 260mm VGA length limitation: 400mm PSU length limitation: 200mm
P/N	CA-1P6-00F1WN-00

Level 20 HT Snow

Case Type	Full Tower
Dimension (H*W*D)	613 x 468 x 503mm (24.13 x 18.43 x 19.8 inch)
Side Panel	4mm Tempered Glass x 4 (Left & Right & Front & Top)
Cooling System	**Top (exhaust):** 140 x 140 x 25mm Turbo fan x 2 (1000rpm, 16dBA)
Drive Bays - Accessible - Hidden	4 x 3.5" or 2.5" (With HDD Cage) 1 x 2.5" (With HDD Bracket)
Expansion Slots	8
Motherboards	6.7" x 6.7" (Mini ITX), 9.6: x 9.6" (Micro ATX), 12" x 9.6" (ATX), 12" x 13" (E-ATX)
I/O Port	1 x Type-C, 2 x USB 2.0, 2 x USB 3.0, 1 x HD Audio
Fan Support	**Left Side:** 3 x 120mm, 2 x 140mm **Right Side:** 3 x 120mm, 2 x 140mm **Top:** 2 x 120mm, 2 x 140mm **Rear:** 2 x 120mm, 2 x 140mm **Bottom:** 3 x 120mm
Radiator Support	**Left / Right Side:** 1 x 360mm, 1 x 280mm **Bottom:** 1 x 360mm
Clearance	CPU cooler height limitation: 260mm VGA length limitation: 400mm PSU length limitation: 200mm
P/N	CA-1P6-00F6WN-00

Level 20 RS ARGB

Case Type	Mid Tower
Dimension (H*W*D)	524 x 240.8 x 553mm (20.62 x 9.48 x 21.77 inch)
Side Panel	4mm Tempered Glass x 2 (Left & Right)
Cooling System	**Rear (exhaust):** 120 x 120 x 25mm fan x 1 (1000rpm, 16dBA) **Front (intake):** 200 x 200 x 30mm Addressable RGB fan x 2 (600rpm, 24dBA)
Drive Bays - Accessible - Hidden	2 x 3.5" or 2 x 2.5" (With HDD Rack) 1 x 2.5" (With HDD Bracket); 1 x 3.5" or 2 x 2.5" (With HDD Bracket)
Expansion Slots	7
Motherboards	6.7" x 6.7" (Mini ITX), 9.6: x 9.6" (Micro ATX), 12" x 9.6" (ATX)
I/O Port	2 x USB 2.0, 1 x USB 3.0, 1 x HD Audio, 1 x RGB Button
Fan Support	**Front:** 3 x 120mm, 3 x 140mm, 2 x 200mm **Top:** 3 x 120mm, 2 x 140mm, 1 x 200mm **Rear:** 1 x 120mm
Radiator Support	**Front:** 1 x 360mm, 1 x 280mm **Top:** 1 x 360mm, 1 x 280mm **Rear:** 1 x 120mm **Right Side:** 1 x 360mm (Without HDD Rack)
Clearance	**CPU cooler height limitation:** 172mm **VGA length limitation:** 282mm (With HDD Rack) 400mm (Without HDD Rack) **PSU length limitation:** 220mm
P/N	CA-1P8-00M1WN-00

Level 20

Case Type	Full Tower
Dimension (H*W*D)	732 x 280 x 688mm (28.8 x 11 x 27.1 inch)
Side Panel	4mm Tempered Glass x 3 (Left)
Cooling System	**M/B Chamber** **Rear (exhaust):** 140 x 140 x 25mm Riing Plus RGB fan x 1 **Front (intake):** 140 x 140 x 25mm Riing Plus RGB fan x 2
Drive Bays - Accessible - Hidden	2.5" or 3.5" x 6 (HDD Cage), 2.5" or 3.5" x 2 (HDD Bracket) 2.5" x 3 or 3.5" x 2 (HDD Bracket)
Expansion Slots	8+2
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX), 12" x 13" (E-ATX)
I/O Port	USB 3.0 x 4, Type-C x 1, HD Audio x 1
Fan Support	**LCS/Storage Chamber:** 4 x 120mm, 3 x 140mm **M/B Chamber:** **Front:** 3 x 120mm, 2 x 140mm **Rear:** 1 x 120mm, 1 x 140mm
Radiator Support	**LCS/Storage Chamber:** 1 x 480mm, 1 x 420mm **M/B Chamber:** **Front:** 1 x 360mm, 1 x 280mm **Rear:** 1 x 120mm, 1 x 140mm
Clearance	CPU cooler height limitation: 200 mm VGA length limitation: 260 mm (With Thick Radiator + Fan) 310 mm (Without Radiator) PSU length limitation: 220 mm
P/N	CA-1J9-00F9WN-00

Level 20 GT RGB Plus

Case Type	Full Tower
Dimension (H*W*D)	580 x 294 x 592 mm (22.9 x 11.6 x 23.3 inch)
Side Panel	5mm Tempered Glass x 4 (Left & Right & Front & Top)
Cooling System	**Rear (exhaust):** 140 x 140 x 25 mm Riing Plus 14 RGB fan x 1 (1400rpm, 28dBA) **Front (intake):** 200 x 200 x 30 mm Riing Plus 20 RGB fan x 2 (1000rpm, 28dBA)
Drive Bays - Accessible - Hidden	2.5" x 4 or 3.5" x 4 (HDD Rack) 2.5" x 6 or 3.5" x 3
Expansion Slots	8
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX) , 12" x 13" (E-ATX)
I/O Port	USB 3.0 x 2, USB 2.0 x 2, HD Audio x 1, Type-C x 1
Fan Support	**Front:** 3 x 120 mm , 3 x 140 mm , 2 x 200 mm **Top:** 3 x 120 mm , 3 x 140 mm 2 x 200mm **Rear:** 1 x 120 mm , 1x 140 mm **Bottom:** 2 x 120 mm
Radiator Support	**Front :** 1 x 360 mm , 1 x 420 mm , 1 x 360 mm (For 200 mm fan) **Top:** 1 x 360 mm , 1 x 420 mm , 1 x 360 mm (For 200 mm fan) **Rear:** 1 x 120 mm , 1x 140 mm **Right:** 1 x 360 mm , 1 x 420 mm (AIO: 1 x 360 mm , 1 x 280 mm) **Bottom:** 1 x 240 mm
Clearance	CPU cooler height limitation: 200 mm VGA length limitation: 310 mm (With HDD Rack) 410 mm (Without HDD Rack) PSU length limitation: 220 mm (Without Bottom Fan)
P/N	CA-1K9-00F1WN-01

Level 20 GT ARGB

Case Type	Full Tower
Dimension (H*W*D)	580 x 294 x 592 mm (22.9 x 11.6 x 23.3 inch)
Side Panel	5mm Tempered Glass x 4 (Left & Right & Front & Top)
Cooling System	**Rear (exhaust):** 200 x 200 x 30mm Addressable RGB fan x 2 (800rpm, 29.2dBA) **Front (intake):** 140 x 140 x 25mm fan (1000rpm, 16dBA)
Drive Bays - Accessible - Hidden	2.5" x 4 or 3.5" x 4 (HDD Rack) 2.5" x 6 or 3.5" x 3
Expansion Slots	8
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX) , 12" x 13" (E-ATX)
I/O Port	USB 3.0 x 2, USB 2.0 x 2, HD Audio x 1, Type-C x 1
Fan Support	**Front:** 3 x 120 mm , 3 x 140 mm , 2 x 200 mm **Top:** 3 x 120 mm , 3 x 140 mm 2 x 200mm **Rear:** 1 x 120 mm , 1x 140 mm **Bottom:** 2 x 120 mm
Radiator Support	**Front :** 1 x 360 mm , 1 x 420 mm , 1 x 360 mm (For 200 mm fan) **Top:** 1 x 360 mm , 1 x 420 mm , 1 x 360 mm (For 200 mm fan) **Rear:** 1 x 120 mm , 1x 140 mm **Right:** 1 x 360 mm , 1 x 420 mm (AIO: 1 x 360 mm , 1 x 280 mm) **Bottom:** 1 x 240 mm
Clearance	CPU cooler height limitation: 200 mm VGA length limitation: 310 mm (With HDD Rack) 410 mm (Without HDD Rack) PSU length limitation: 220 mm (Without Bottom Fan)
P/N	CA-1K9-00F1WN-02

Level 20 GT ARGB Black Edition

Case Type	Full Tower
Dimension (H*W*D)	580 x 294 x 592 mm (22.9 x 11.6 x 23.3 inch)
Side Panel	5mm Tempered Glass x 4 (Left & Right & Front & Top)
Cooling System	**Rear (exhaust):** 200 x 200 x 30mm Addressable RGB fan x 2 (600rpm, 24dBA) **Front (intake):** 140 x 140 x 25mm fan (1000rpm, 16dBA)
Drive Bays - Accessible - Hidden	2.5" x 4 or 3.5" x 4 (HDD Rack) 2.5" x 6 or 3.5" x 3
Expansion Slots	8
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX) , 12" x 13" (E-ATX)
I/O Port	USB 3.0 x 2, USB 2.0 x 2, HD Audio x 1, Type-C x 1
Fan Support	**Front:** 3 x 120 mm , 3 x 140 mm , 2 x 200 mm **Top:** 3 x 120 mm , 3 x 140 mm 2 x 200mm **Rear:** 1 x 120 mm , 1x 140 mm **Bottom:** 2 x 120 mm
Radiator Support	**Front :** 1 x 360 mm , 1 x 420 mm , 1 x 360 mm (For 200 mm fan) **Top:** 1 x 360 mm , 1 x 420 mm , 1 x 360 mm (For 200 mm fan) **Rear:** 1 x 120 mm , 1x 140 mm **Right:** 1 x 360 mm , 1 x 420 mm (AIO: 1 x 360 mm , 1 x 280 mm) **Bottom:** 1 x 240 mm
Clearance	CPU cooler height limitation: 200 mm VGA length limitation: 310 mm (With HDD Rack) 410 mm (Without HDD Rack) PSU length limitation: 220 mm (Without Bottom Fan)
P/N	CA-1K9-00F1WN-03

Level 20 MT ARGB

Case Type	Mid Tower
Dimension (H*W*D)	455 x 204 x 471 mm (17.9 x 8.0 x 18.54 inch)
Side Panel	4mm Tempered Glass x 2 (Left & Front)
Cooling System	**Rear (exhaust) :** 120 x 120 x 25 mm fan (1000 rpm, 26 dBA) x 1 **Front (intake) :** 120 x 120 x 25 mm Addressable RGB fan (1000 rpm, 27.2 dBA) x 3
Drive Bays - Accessible - Hidden	1 x 2.5''(HDD Bracket); 2 x 2.5" 2 x 3.5'' or 2.5"(HDD Cage); 1 x 2.5"(HDD Bracket)
Expansion Slots	7
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)
I/O Port	USB 3.0 x 2, HD Audio x 1, RGB Switch x 1
Fan Support	**Front:** 3 x 120 mm, 2 x 140 mm **Top:** 2 x 120 mm, 1 x 140 mm **Rear:** 1 x 120 mm **Right Side(In front of M/B Tray):** 2 x 120 mm **Bottom(On the power cover):** 2 x 120 mm
Radiator Support	**Front:** 1 x 360 mm **Rear:** 1 x 120 mm **Right Side(In front of M/B Tray):** 1 x 240 mm
Clearance	CPU cooler height limitation: 170mm VGA length limitation: 260mm(With radiator on the right side) 366mm(Without radiator on the right side) PSU length limitation: 170mm
P/N	CA-1M7-00M1WN-00

Level 20 XT

Case Type	E-ATX Cube Case
Dimension (H*W*D)	515 x 394 x 662 mm (20.3 x 15.5 x 26.06 inch)
Side Panel	4 mm Tempered Glass x 4 (Left & Right & Front & Top)
Cooling System	**Rear (exhaust) :** 140 x 140 x 25 mm fan (1000rpm, 16dBA)
Drive Bays -Accessible -Hidden	6 x 3.5'' or 2.5'' (HDD Cage) 1 x 3.5'', 2 x 2.5'' (M/B Tray)
Expansion Slots	8
Motherboard	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX), 12" x 13" (Extend ATX)
I/O Port	USB 2.0 x2, USB 3.0 x2, HD Audio x 1, Type-C x1
Fan Support	**Front:** 3 x 120 mm, 2 x 140 mm, 2 x 200 mm **Top:** 8 x 120 mm, 6 x 140 mm, 2 x 200 mm **Rear:** 2 x 120 mm or 2 x 140 mm **Left / Right Side:** 4 x 120 mm, 3 x 140 mm **Bottom:** 3 x 120 mm
Radiator Support	**Front:** 1 x 360 mm, 1 x 280 mm, 1x 360 mm (200 mm series) **Top:** 2 x 480 mm, 2 x 420 mm, 1 x 360 mm (200 mm series) **Rear:** 1 x 120 mm, 1 x 140 mm **Left / Right Side:** 1 x 480 mm, 1 x 420 mm **Bottom:** 1 x 480 mm, 1 x 420 mm
Clearance	CPU cooler height limitation: 250 mm VGA length limitation:590 mm PSU length limitation: 220 mm (With Bottom Fan)
P/N	CA-1L1-00F1WN-00

Level 20 VT

Case Type	Micro Case
Dimension (H*W*D)	348 x 330 x 430 mm (13.7 x 13 x 16.9 inch)
Side Panel	4mm Tempered Glass x 4 (Left & Right & Front & Top)
Cooling System	**Front (intake) :** 200 x 200 x 30 mm fan (800rpm, 13dBA)
Drive Bays -Hidden	3.5'' or 2.5" x 3 , 2.5'' x 3
Expansion Slots	5
Motherboard	6.7" x 6.7" (Mini ITX) , 9.6" x 9.6" (Micro ATX)
I/O Port	USB 3.0 x 2, USB 2.0 x 2, HD Audio x 1
Fan Support	**Front:** 2 x 120 mm, 2 x 140 mm, 1 x 200 mm **Top:** 4 x 120 mm, 2 x 140 mm **Rear:** 1 x 120 mm, 1 x 140 mm **Bottom:** 2 x 120 mm
Radiator Support	**Front:** 1 x 240 mm, 1 x 140 mm 1 x 180 mm (200 mm series) **Top:** 2 x 240 mm, 1 x 280 mm 1 x 180 mm (200 mm series) **Rear:** 1 x 120 mm
Clearance	CPU cooler height limitation: 185 mm VGA length limitation: 350 mm PSU length limitation: 200 mm (With Bottom Fan)
P/N	CA-1L2-00S1WN-00

A700 Aluminum TG

A700 Aluminum TG

Full Tower Chassis

- Sleek and elegant Aluminum case
- Two 5mm Tempered Glass panels
- Two preinstalled 140mm fans with removable filters
- Supports up to total of four 200mm fans
- Patented Rotational PCI-E 8 slots design support SLI vertical GPU

A500 Aluminum TG

A500 Aluminum TG

Mid Tower Chassis

- Sleek and elegant Aluminum case
- Two 4mm Tempered Glass panels
- Top-Front I/O ports with 2 x USB 3.0 & USB 2 .0 & 1 x USB 3.1 Type-C
- Three preinstalled 120mm fans with removable filters
- Fully modular design
- Supports AIO and DIY liquid cooling solutions

Tempered Glass

Modular Ready

S500 TG
S500 TG Snow

S500 TG
S500 TG Snow

Mid Tower Chassis

- Sleek and elegant steel case
- Preinstalled one 140mm front fan and one 120mm rear fan
- Supports up to total of four 200mm fans
- Patented Rotational PCI-E 8 slots design support SLI vertical GPU
- Removable power cover included

S300 TG
S300 TG Snow

S300 TG
S300 TG Snow

Mid Tower Chassis

- Sleek and elegant steel case
- One Tempered Glass side panel
- Preinstalled one 120mm standard fan at the rear
- Patented Rotational PCI-E 8 slots design support SLI vertical GPU
- Removable power cover included

A700 Aluminum TG

Case Type	Full Tower
Dimension (H*W*D)	583 x 294 x 587 mm (23 x 11.6 x 23.1 inch)
Side Panel	5mm Tempered Glass x 2 (Left & Right)
Cooling System	**Rear (exhaust) :** 140 x 140 x 25 mm fan x 1 (1000rpm, 28dBA) **Front (intake) :** 140 x 140 x 25 mm fan x 1 (1400rpm, 28dBA)
Drive Bays -Accessible -Hidden	2.5" X 4 or 3.5" x 4 (HDD Rack) 2.5" x 6 or 3.5" x 3
Expansion Slots	8
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX) 12" x 13"(E-ATX)
Fan Support	**Front:** 3 x 120mm , 3 x 140mm , 2 x 200mm **Top:** 3 x 120mm , 2 x 140mm , 2 x 200mm **Rear:** 1 x 120mm , 1 x 140mm **Bottom:** 2 x 120mm
Radiator Support	**Front:** 1 x 360mm, 1 x 420mm, 1 x 360mm (For 200mm fan) **Top:** 1 x 360mm, 1 x 420mm, 1 x 360mm (For 200mm fan) **Rear:** 1 x 120mm, 1 x 140mm **Right:** 1 x 360mm, 1 x 420mm (AIO: 1 x360mm, 1 x 280mm) **Bottom:** 1 x 240mm
Clearance	CPU cooler height limitation: 200mm VGA length limitation: 310mm(With HDD Rack) 410mm(Without HDD Rack) PSU length limitation: 220mm (Without Bottom Fan)
P/N	CA-1O2-00F9WN-00

A500 Aluminum TG

Case Type	Mid Tower
Dimension (H*W*D)	560 x 236 x 510 mm (22 x 9.3 x 20.1 inch)
Side Panel	4mm Tempered Glass x 2 (Left & Right)
Cooling System	**Rear (exhaust) :** 120 x 120 x 25 mm fan (1000rpm, 22dBA) x 1 **Front (intake) :** 120 x 120 x 25 mm fan (1000rpm, 22dBA) x 2
Drive Bays -Accessible -Hidden	2.5" or 3.5" x 4 (HDD Rack) 2.5" or 3.5" x 2 (HDD Rack) ; 2.5" x 1 (HDD Bracket)
Expansion Slots	8 + 2
Motherboards	6.7'' x 6.7'' (Mini ITX), 9.6'' x 9.6'' (Micro ATX), 12'' x 9.6'' (ATX)
Fan Support	**Front:** 3 x 120mm, 3 x 140mm **Top:** 3 x 120mm, 2 x 140mm **Rear:** 1 x 120mm
Radiator Support	**Front:** 1 x 360mm, 1 x 420mm **Top:** 1 x 360mm, 1 x 280mm **Rear:** 1 x 120mm
Clearance	CPU cooler height limitation: 160mm VGA length limitation: 295mm(With HDD Rack) 420mm(Without HDD Rack) PSU length limitation: 220mm (Without Bottom Fan)
P/N	CA-1L3-00M9WN-00

thermaltake

S500 TG
S500 TG Snow

Case Type	Mid Tower
Dimension (H*W*D)	565 x 240 x 500 + A28 mm (22.2 x 9.4 x 19.7 inch)
Side Panel	4mm Tempered Glass x 1 (Left)
Cooling System	**Rear (exhaust) :** 120 x 120 x 25 mm fan x 1 (1000rpm, 28dBA) **Front (intake) :** 140 x 140 x 25 mm fan x 1 (1400rpm, 28dBA)
Drive Bays -Accessible -Hidden	2.5" X 2 or 3.5" x 2 (HDD Rack) 2.5" X 2
Expansion Slots	8
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)
Fan Support	**Front:** 3 x 120mm , 3 x 140mm , 2 x 200mm **Top:** 3 x 120mm , 2 x 140mm , 2 x 200mm **Rear:** 1 x 120mm
Radiator Support	**Front:** 1 x 120mm, 1 x 140mm, 1 x 280mm, 1 x 360mm **Top:** 1 x 120mm, 1 x 140mm, 1 x 280mm, 1 x 360mm **Rear:** 1 x 120mm **Right: 1 x 360mm**
Clearance	CPU cooler height limitation: 172mm VGA length limitation: 282mm(With HDD Rack) 400mm(Without HDD Rack) PSU length limitation: 220mm (Without Bottom Fan)
P/N	TG: CA-1O3-00M1WN-00 Snow: CA-1O3-00M6WN-00

S300 TG
S300 TG Snow

Case Type	Mid Tower
Dimension (H*W*D)	493 x 230 x 508 mm (19.4 x 9.05 x 20 inch)
Side Panel	4mm Tempered Glass x 1 (Left)
Cooling System	**Rear (exhaust) :** 120 x 120 x 25 mm fan x 1 (1000rpm, 16dBA)
Drive Bays -Accessible -Hidden	2.5" X 2 or 3.5" x 2 (HDD Rack); 3.5" x 2 (Without HDD Rack) 2.5" X 2 (HDD Bracket)
Expansion Slots	7
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)
Fan Support	**Front:** 3 x 120mm, 3 x 140mm, 2 x 200mm **Top:** 3 x 120mm, 2 x 140mm, 1 x 200mm **Rear:** 1 x 120mm, 1 x 140mm
Radiator Support	**Front:** 1 x 280mm, 1 x 360mm **Top:** 1 x 240mm, 1 x 280mm **Rear:** 1 x 120mm, 1 x 140mm **Right:** 1 x 360mm (Without HDD Rack)
Clearance	CPU cooler height limitation: 170mm VGA length limitation: 280mm(With Reservoir) 360mm(Without Reservoir) PSU length limitation: 200mm
P/N	CA-1P5-00M1WN-00

Core P7 TG

Full Tower Chassis

- Front I/O ports with 2 x USB 3.0 & 2 x USB 2.0
- Seven drive bays with modular drive racks design
- Supports AIO and DIY liquid cooling solution
- LCS & Advance Cable Management
- Supports E-ATX motherboards

Core P90 TG

Mid Tower Chassis

- Angled open frame design
- Two-side 5mm thick Tempered Glass panels
- 2 x USB 3.0 & 2 x USB 2.0 with HD audio
- 3-Way placement layout options (Wall/Vertical/Horizontal)
- Dual GPU placement options
- Supports radiators up to 480mm and fans up to three 140mm
- Supports ATX motherboards

Core P5 TG V2 Black Edition

Mid Tower Chassis

- 5mm thick Tempered Glass panel
- USB 3.0 x 4 & HD Audio x 1
- 3-Way placement layout options (Wall/Vertical/Horizontal)
- Dual motherboard/GPU/PSU placement options
- Supports radiators up to 480mm and fans up to three 140mm
- Supports up to E-ATX motherboards

Core P5 TG Ti

Mid Tower Chassis

- 5mm thick Tempered Glass panel
- USB 3.0 x 4 & HD Audio x 1
- 3-Way placement layout options (Wall/Vertical/Horizontal)
- Dual motherboard/GPU/PSU placement options
- Supports radiators up to 480mm and fans up to three 140mm
- Supports up to E-ATX motherboards

Core P3 TG

Mid Tower Chassis

- Top-front I/O ports with 2 x USB 3.0 & 2 x USB 2.0
- Three drive bays with modular drive rack design
- LCS & Advanced Cable Management

Core P1 TG

Mini Chassis

- 5mm thick Tempered Glass panel
- Front I/O ports with 2 x USB 3.0
- One + three drive bays with modular drive tray design
- Supports AIO and DIY liquid cooling solutions

Core P7 TG

Case Type	Full Tower
Dimension (H*W*D)	Main Chassis: 608 x 333 x 570 mm (23.9 x 13.1 x 22.4 inch) Extended Chassis: 608 x 333 x 320 mm (23.9 x 13.1 x 12.6 inch) Assembling Chassis: 627 x 333 x 1350 mm (24.7 x 13.1 x 53.1 inch)
Side Panel	5mm Tempered Glass x 1
Drive Bays -Accessible -Hidden	1 x 3.5'' or 2.5'' (HDD tray) , 2 x 3.5'' or 3 x 2.5'' (HDD Bracket) 3 x 3.5'' or 2.5'' (Behind the M/B tray)
Expansion Slots	8
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX) , 12" x 13" (E-ATX)
I/O Port	USB 3.0 x 2, USB 2.0 x 2, HD Audio x 1
Fan Support	Main Chassis: 4x 120mm , 3 x 140mm Extended Chassis (Left or Right): 4 x 120mm , 3 x 140mm
Radiator Support	Main Chassis: 1 x 480mm , 1 x 420mm Extended Chassis (Left or Right): 1 x 480mm , 1 x 420mm
Clearance	CPU cooler height limitation: 180mm VGA length limitation: 280mm (With Reservoir) 570mm (Without Reservoir) PSU length limitation: 200mm
P/N	CA-1I2-00F1WN-00

Core P90 TG

Case Type	Mid Tower
Dimension (H*W*D)	470 x 470 x 615 mm (18.5 x 18.5 x 24.2 inch)
Side Panel	5mm Tempered Glass x 2 (Left & Right)
Drive Bays - Accessible - Hidden	3 x 2.5'' (HDD Bracket) ; 2 x 3.5" or 2 x 2.5" (Optional) 2 x 3.5'' or 2 x 2.5'' (Behind the M/B tray)
Expansion Slots	8
Motherboard	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)
I/O Port	USB 3.0 x 2, USB 2.0 x 2, HD Audio x 1
Fan Support	Right Side: 4 x 120mm 3 x 140mm
Radiator Support	Right Side: 1 x 480mm 1 x 420mm
Clearance	CPU cooler height limitation: 180mm VGA length limitation: 320mm PSU length limitation: 220mm
P/N	CA-1J8-00M1WN-00

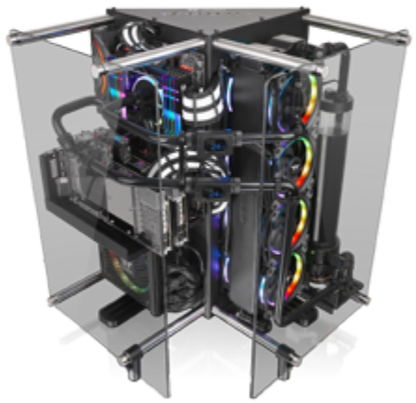

Core P5 TG V2 Black Edition

Case Type	Mid Tower
Dimension (H*W*D)	608 x 333 x 570mm (23.9 x 13.1 x 22.4 inch)
Side Panel	5mm Tempered Glass x 1
Drive Bays - Accessible - Hidden	1 x 3.5" or 2.5" (HDD tray); 2 x 2.5" or 3.5" (HDD Bracket) 3 x 3.5" or 2.5" (Behind the M/B tray)
Expansion Slots	8
Motherboard	6.7 x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)
I/O Port	USB 3.0 x 4, HD Audio x 1
Fan Support	Left Side: 4 x 120mm, 3 x 140mm
Radiator Support	Left Side: 1 x 480mm, 1 x 420mm
Clearance	CPU cooler height limitation: 180mm VGA length limitation: 280mm (with Reservoir) 320mm (without Reservoir) PSU length limitation: 200mm
P/N	CA-1E7-00M1WN-05

Core P5 TG Ti

Case Type	Mid Tower
Dimension (H*W*D)	608 x 333 x 570mm (23.9 x 13.1 x 22.4 inch)
Side Panel	5mm Tempered Glass x 1
Drive Bays - Accessible - Hidden	1 x 3.5" or 2.5" (HDD tray); 2 x 2.5" or 3.5" (HDD Bracket) 3 x 3.5" or 2.5" (Behind the M/B tray)
Expansion Slots	8
Motherboard	6.7 x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)
I/O Port	USB 3.0 x 4, HD Audio x 1
Fan Support	Left Side: 4 x 120mm, 3 x 140mm
Radiator Support	Left Side: 1 x 480mm, 1 x 420mm
Clearance	CPU cooler height limitation: 180mm VGA length limitation: 280mm (with Reservoir) 320mm (without Reservoir) PSU length limitation: 200mm
P/N	CA-1E7-00M9WN-00

Core P3 TG

Case Type	Mid Tower
Dimension (H*W*D)	512 x 333 x 470mm (20.2 x 13.1 x 18.5 inch)
Side Panel	5mm Tempered Glass x 1
Drive Bays - Accessible - Hidden	2 x 3.5" or 3 x 2.5" (Outside the chassis) 2 x 3.5" or 2.5"(Inside the chassis)
Expansion Slots	8
Motherboard	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX) 12" x 9.6" (ATX)
I/O Port	USB 3.0 x 2, USB 2.0 x 2, HD Audio x 1
Fan Support	Left Side: 3 x 120mm, 3 x 140mm
Radiator Support	Left Side: 1 x 360mm, 1 x 420mm
Clearance	CPU cooler height limitation: 180mm VGA length limitation: 280mm (with Reservoir) 450mm (without Reservoir) PSU length limitation: 200mm
P/N	P3: CA-1G4-00M1WN-00 TG: CA-1G4-00M1WN-06 Snow: CA-1G4-00M6WN-00

Core P1 TG

Case Type	Mini Case
Dimension (H*W*D)	422 x 332 x 380mm (16.6 x 13.1 x 15 inch)
Side Panel	5mm Tempered Glass x 1
Drive Bays - Accessible - Hidden	2 x 3.5" (Outside the chassis) 1 x 3.5" or 2.5"(Inside the chassis) 1 x 2.5"(Inside the chassis)
Expansion Slots	5
Motherboard	6.7" x 6.7" (Mini ITX)
I/O Port	USB 3.0 x 2, HD Audio x 1
Fan Support	Left Side: 2 x 120mm
Radiator Support	Left Side: 1 x 240mm
Clearance	CPU cooler height limitation: 170mm VGA length limitation: 380mm (Radiator thickness under 30mm without fan) PSU length limitation: 180mm Radiator Width Limitation: 122mm
P/N	CA-1H9-00T1WN-00

View 91 TG RGB Plus

Super Tower Chassis

- Three 5mm thick Tempered Glass panels with swing door design
- Four preinstalled 140mm Riing Plus RGB fans
- Syncs with Razer Chroma and Amazon Alexa
- Dual GPU placement options
- Two way radiator placement options (vertical and horizontal)
- Supports radiators up to 480mm and fans up to eight 200mm
- Supports AIO and DIY liquid cooling solutions

View 71 TG ARGB

Full Tower Chassis

- Four 5mm thick Tempered Glass panels
- Three preinstalled 140mm ARGB fans
- Top-front I/O ports with 2 x USB 3.0 & 2 x USB 2.0
- Supports synchronization with ASUS, GIGABYTE, MSI, and ASRock motherboards
- LCS & Advanced Cable Management

View 71 TG RGB Plus

Full Tower Chassis

- Four 5mm thick Tempered Glass panels
- Three preinstalled Riing 14 RGB fans
- Top-front I/O ports with 2 x USB 3.0 & 2 x USB 2.0
- Four drive bays with modular drive rack design
- LCS & Advanced Cable Management

View 31 TG ARGB

Mid Tower Chassis

- Two 4mm thick Tempered Glass panels
- Three preinstalled 140mm ARGB fans with removable filters
- Top-front I/O ports with 2 x USB 3.0 & 2 x USB 2.0
- Supports synchronization with ASUS, GIGABYTE, MSI, and ASRock motherboards
- LCS & Advanced Cable Management

View 37 ARGB

Mid Tower Chassis

- Top-front I/O ports with 2 x USB 3.0 & 2 x USB 2.0
- Two preinstalled 200mm ARGB fans & one preinstalled 120mm ARGB fan
- Supports synchronization with ASUS, GIGABYTE, MSI, and ASRock motherboards
- Three + four drive bays/brackets with innovative tool-less design
- LCS & Advanced Cable Management

View 23 TG ARGB

Mid Tower Chassis

- Top-front I/O ports with 2 x USB 3.0
- Three preinstalled 120mm ARGB fans & one preinstalled 120mm standard fan
- Supports synchronization with ASUS, GIGABYTE, MSI, and ASRock motherboards
- AIO & Advanced Cable Management

View 21 TG RGB

Mid Tower Chassis

- Two 4mm thick Tempered Glass panels
- Four preinstalled 120mm Pure Plus RGB fans
- Sync with Razer Chroma and Amazon Alexa
- Top-front I/O ports with 2 x USB 3.0
- LCS & Advanced Cable Management

View 91 TG RGB Plus

Case Type	Super Tower
Dimension (H*W*D)	691 x 344 x 645mm (27.2 x 13.5 x 25.4 inch)
Side Panel	5mm Tempered Glass x 3 (Left & Right & Front)
Cooling System	**Rear (exhaust):** 140 x 140 x 25mm Riing Plus RGB fan x 1 (500-1400rpm, 27.2dBA) **Front (intake):** 140 x 140 x 25mm Riing Plus RGB fan x 3 (500-1400rpm, 27.2dBA)
Drive Bays -Accessible -Hidden	12 x 3.5'' or 2.5'' (HDD Cage) -
Expansion Slots	10+2
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX) , 12" x 13" (E-ATX) , 13.6" x 10.4" (XL-ATX)
I/O Port	USB 3.0 x 4, Type-C x 1, HD Audio x 1
Fan Support	**Front:** 4 x 120mm, 3 x 140mm **Top:** 4 x 120mm, 3 x 140mm, 2 x 200mm **Rear:** 1 x 120mm, 1 x 140mm **Right Side(Behind M/B Tray):** 8 x 120mm, 8 x 140mm, 6 x 200mm **Bottom:** 3 x 120mm, 3 x 140mm
Radiator Support	**Front:** 1 x 480mm, 1 x 420mm **Top:** 1 x 480mm, 1 x 420mm, 1 x 400mm **Rear:** 1 x 120mm, 1 x 140mm **Right Side(In front of M/B Tray):** 1 x 480mm, 1 x 420mm **Bottom:** 1 x 120mm, 1 x 280mm
Clearance	CPU cooler height limitation: 200mm VGA length limitation: 470mm(with HDD rack) 600mm(without HDD rack) PSU length limitation: 180mm (With Three Bottom Fan) 220mm (With Two Bottom Fan)
P/N	CA-1I9-00F1WN-00

View 71 TG ARGB

Case Type	Full Tower
Dimension (H*W*D)	592 x 274 x 577mm (23.3 x 10.78 x 22.72 inch)
Side Panel	5mm Tempered Glass x 4 (Left & Right & Front & Top)
Cooling System	**Rear (exhaust):** 140 x 140 x 25mm Addressable RGB fan x 1 (1000rpm, 27.2dBA) **Front (Intake):** 140 x 140 x 25mm Addressable RGB fan x 2 (1000rpm, 27.2dBA)
Drive Bays - Accessible - Hidden	2.5" x 4 or 3.5" x 4 (HDD Rack) 2.5" x 6 or 3.5" x 3
Expansion Slots	8 + 2
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX) , 12" x 13" (E-ATX)
I/O Port	USB 3.0 x 2, USB 2.0 x 2, HD Audio x 1
Fan Support	**Front:** 3 x 120mm, 3 x 140mm **Top:** 3 x 120mm, 3 x 140mm **Rear:** 1 x 120mm, 1 x 140mm **Bottom:** 2 x 120mm
Radiator Support	**Front:** 1 x 360mm , 1 x 420mm **Top:** 1 x 360mm, 1 x 420mm **Rear:** 1 x 120mm , 1 x 140mm **Right :** 1 x 360mm, 1 x 420mm **Bottom :** 2 x 120mm
Clearance	CPU cooler height limitation: 190mm VGA length limitation: 310mm(With HDD Rack) 410mm(Without HDD Rack) PSU length limitation: 220mm (Without Bottom Fan)
P/N	CA-1I7-00F1WN-03

View 71 TG RGB Plus

Case Type	Full Tower
Dimension (H*W*D)	592 x 274 x 577 mm (23.3 x 10.78 x 22.72 inch)
Side Panel	5mm Tempered Glass x 4 (Left & Right & Front & Top)
Cooling System	**Rear (exhaust):** 140 x 140 x 25mm Riing RGB fan (1400rpm, 28dBA) **Front (intake):** 140 x 140 x 25mm Riing RGB fan (1400rpm, 28dBA)
Drive Bays - Accessible - Hidden	2.5" x 4 or 3.5" x 4 (HDD Rack) 2.5" x 6 or 3.5" x 3
Expansion Slots	8 + 2
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX) , 12" x 13" (E-ATX)
I/O Port	USB 3.0 x 2, USB 2.0 x 2, HD Audio x 1
Fan Support	**Front:** 3 x 120mm, 2 x 140mm **Top:** 3 x 120mm, 3 x 140mm **Rear:** 1 x 120mm, 1 x 140mm **Bottom:** 2 x 120mm
Radiator Support	**Front:** 1 x 360mm , 1 x 420mm **Top:** 1 x 360mm, 1 x 420mm **Rear:** 1 x 120mm , 1 x 140mm **Right :** 1 x 360mm, 1 x 420mm **Bottom :** 2 x 240mm
Clearance	CPU cooler height limitation: 190mm VGA length limitation: 310mm(With HDD Rack) 410mm(Without HDD Rack) PSU length limitation: 220mm (Without Bottom Fan)
P/N	CA-1I7-00F1WN-01

View 31 ARGB

Case Type	Mid Tower
Dimension (H*W*D)	497 x 250 x 511mm (19.5 x 9.8 x 20.1 inch)
Material	SPCC
Side Panel	4mm Tempered Glass x 4 (Left & Right)
Cooling System	**Rear (exhaust):** 140 x 140 x 25mm Addressable RGB fan x 1 (1000rpm, 27.2dBA) **Front (Intake):** 140 x 140 x 25mm Addressable RGB fan x 2 (1000rpm, 27.2dBA)
Drive Bays - Accessible - Hidden	 3 x 3.5'' or 2.5"
Expansion Slots	8 + 2
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)
I/O Port	USB 3.0 x 2, USB 2.0 x 2, HD Audio x 1, RGB Button x 1
Fan Support	**Front:** 3 x 120mm, 2 x 140mm, 1 x 200mm **Rear:** 1 x 120mm, 1 x 140mm **Top:** 3 x 120mm, 3 x 140mm, 2 x 200mm **Bottom:** 2 x 120mm, 2 x 140mm
Radiator Support	**Front:** 1 x 360mm , 1 x 280mm **Rear:** 1 x 120mm , 1 x 140mm **Top:** 1 x 360mm, 1 x 280mm **Bottom :** 1 x 120mm, 1 x 140mm
Clearance	CPU cooler height limitation: 180mm PSU length limitation: 180mm (With One Bottom Fan) 220mm (Without Bottom Fan) VGA length limitation: 278mm (With HDD Rack) 420mm (Without HDD Rack)
P/N	CA-1H8-00M1WN-02

View 37 ARGB

Case Type	Mid Tower
Dimension (H*W*D)	525 x 261 x 538 mm (20.6 x 10.3 x 21.2 inch)
Material	SPCC
Side Panel	L-type transparent window
Cooling System	**Rear (exhaust):** 120 x 120 x 25mm Addressable RGB fan x 1 (1000rpm, 27.2dBA) **Front (intake):** 200 x 200 x 30mm Addressable RGB fan x 2 (800rpm, 29.2dBA)
Drive Bays - Accessible - Hidden	3 x 3.5" or 2.5" (HDD tray) 8 x 2.5" or 4 x 3.5" (HDD Bracket)
Expansion Slots	8 + 2
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX), 12" x 13" (E-ATX)
I/O Port	USB 3.0 x 2, USB 2.0 x 2, HD Audio x 1
Fan Support	**Front:** 3 x 120mm, 3 x 140mm, 2 x 200mm **Rear:** 1 x 120mm, 1 x 140mm **Right Side (In front of M/B Tray):** 3 x 120mm, 3 x 140mm **Bottom:** 1 x 120mm, 1 x 140mm
Radiator Support	**Front:** 1 x 360mm , 1 x 280mm **Rear:** 1 x 120mm , 1 x 140mm **Right Side (In front of M/B Tray):** 1 x 360mm, 1 x 420mm
Clearance	CPU cooler height limitation: 180mm PSU length limitation: 220mm VGA length limitation: 410mm(Without Front Fan)
P/N	CA-1J7-00M1WN-04

View 23 TG ARGB

Case Type	Mid Tower
Dimension (H*W*D)	466 x 203 x 441mm (18.3 x 8.0 x 17.3 inch)
Side Panel	4mm Tempered Glass x 1 (Left)
Cooling System	**Rear (exhaust):** 120 x 120 x 25mm fan x 1 (1000rpm, 26 dBA) **Front (Intake):** 120 x 120 x 25mm Addressable RGB fan x 3 (1000rpm, 27.2 dBA)
Drive Bays - Accessible - Hidden	1 x 2.5''(HDD Bracket); 2 x 2.5" 2 x 3.5'' or 2.5"(HDD Cage); 1 x 2.5"(HDD Bracket)
Expansion Slots	7
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)
I/O Port	USB 3.0 x 2, HD Audio x 1, RGB Switch x 1
Fan Support	**Front:** 3 x 120mm **Rear:** 2 x 120mm, 1 x 140mm **Right Side (In front of M/B Tray):** 2 x 120mm **Bottom (On the power cover):** 2 x 120mm
Radiator Support	**Front:** 1 x 360mm **Rear:** 1 x 120mm **Right Side (In front of M/B Tray):** 1 x 240mm
Clearance	CPU cooler height limitation: 170mm PSU length limitation: 170mm VGA length limitation: 260mm (With radiator on the right side) 366mm (Without radiator on the right side)
P/N	CA-1M8-00M1WN-00

View 21 TG RGB

Case Type	Mid Tower
Dimension (H*W*D)	471 x 224 x 492 mm (18.5 x 8.8 x 19.4 inch)
Side Panel	4mm Tempered Glass x 2 (Left & Right)
Cooling System	**Rear (exhaust) :** 120 x 120 x 25 mm Pure Plus RGB fan (500 - 1500rpm, 25.8 dBA) **Front (intake) :** 120 x 120 x 25 mm Pure Plus RGB fan x 3 (500 - 1500rpm, 25.8 dBA)
Drive Bays - Accessible - Hidden	- 2 x 2.5'' ; 2 x 3.5'' or 2 x 2.5''
Expansion Slots	7
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)
I/O Port	USB 3.0 x 2, HD Audio x 1
Fan Support	**Front:** 3 x 120mm , 2 x 140mm **Top:** 1 x 120mm , 1 x 140mm **Rear:** 1 x 120mm **Bottom:** 1 x 120mm
Radiator Support	**Front:** 1 x 360mm , 1 x 280mm **Rear:** 1 x 120mm
Clearance	CPU cooler height limitation: 160mm VGA length limitation: 410mm PSU length limitation: 220mm
P/N	CA-1I3-00M1WN-05

thermaltake

Asia

Taiwan Headquarters - Thermaltake Technology Co., Ltd.
5F, No. 185, Sec.2, Tiding Blvd., Neihu Dist.,
Taipei City 114, Taiwan
TEL: +886-2-8797-5788
FAX: +886-2-8797-8055
E-MAIL: info@thermaltake.com
WEBSITE: http://www.thermaltake.com

Thermaltake Capital Beijing Co., Ltd.
#907, HaiTai Plaza, No. 229, North 4th Ring Road,
Haidian District, Beijing, 100083, PRC
TEL: +86-10-8288-3159
FAX: +86-10-8288-3302
E-MAIL: ttchina@thermaltake.com.cn
WEBSITE: http://www.thermaltake.com.cn

Americas

Thermaltake USA Inc.
20420 Business Parkway, City of Industry, CA, 91789 USA
TEL: +1626-968-9189
SUPPORT: +1800-988-1088
FAX: +1626-968-7659
E-MAIL: sales@thermaltakeusa.com
WEBSITE: http://www.thermaltakeusa.com

Australia

Thermaltake Australia and New Zealand Pty Ltd.
63-69 Ricketts Road Mount Waverley VIC 3149 Australia
TEL: +613 9131 9827
E-MAIL: sales@thermaltake.com.au
WEBSITE: http://www.thermaltake.com.au

Europe

Thermaltake Germany GmbH
Oststrasse 26, 22844 Norderstedt, Germany
TEL: +49(0)40/30-85-86-0
FAX: +49(0)40/30-85-86-89
E-MAIL: info@thermaltake.de
WEBSITE: http://de.thermaltake.com

Thermaltake Russia Representative Office
Office 404, bld. 40/22, Nikoloyamskaya Str/,
Moscow 109004, Russia
TEL: +7(916) 726- 2888
E-MAIL: info@thermaltakerussia.ru
WEBSITE: http://ru.thermaltake.com

© 2020 Thermaltake Technology Co., Ltd. All Rights Reserved.