

P8 Silent



Pressure-optimised Extra Quiet 80 mm Fan



- Optimised for static pressure
- Ideal choice on heatsinks, radiators and (partly-) covered case vents
- Push- or pull-configuration possible
- Virtually silent motor




Specifications

Fan	80 mm, 1.600 RPM
Airflow	15.6 CFM/26.5 m³/h (@ 1.600 RPM)
Static Pressure	0.62 mm H ₂ O (@ 1.600 RPM)
Noise Level	0.08 Sone (@ 1.600 RPM)
Bearing	Fluid Dynamic Bearing
Current/Voltage	0.06 A / + 12 V DC
Connector	3-pin Connector
Dimensions	80 (L) x 80 (W) x 25 (H) mm
Weight	78.5 g




Virtually silent motor

At low fan speed, the motor is the main source of unwanted noise. A motor developed in Germany with an enhanced bearing reduces friction and noise.

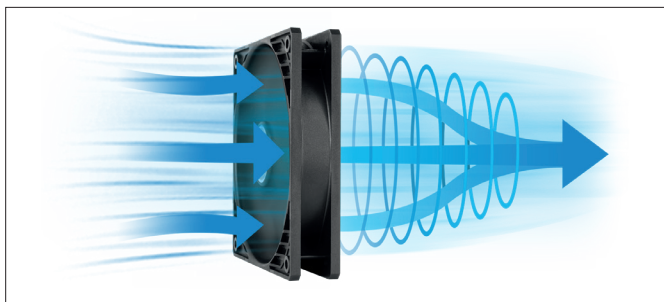

Optimised for Static Pressure

During the development of the new P8 Silent, special emphasis was placed on a focused airstream and thus a high static pressure. The fan guarantees extremely efficient cooling, even with increased air resistance. Therefore, the P8 Silent is particularly suitable for use on heatsinks and radiators.

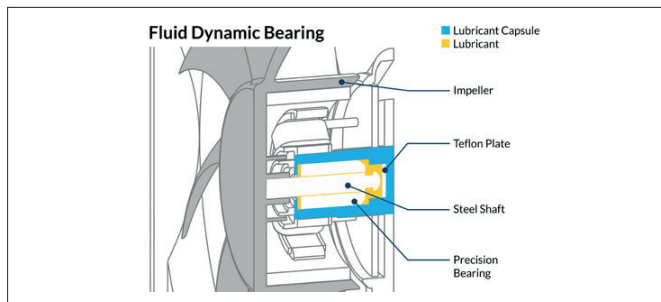

High Quality Bearing

Thanks to an alloy/lubricant combination developed in Germany, friction within the bearing is reduced and greater efficiency is achieved. As a result, there is less heat development as well as less bearing noise, which means you can enjoy a longer service life from your fan.



Product Information

