

KERN CCS 600K-2U

KERN

Counting system to count the smallest parts in large quantities, maximum number of parts which can be displayed is 999,999



Date of creation: 19.06.2026

Category

Brand	KERN
Product category	Industrial scale
Product group	Counting system
Product family	CCS

Measuring System

Weighing system	Strain gauge
Reference scale - Weighing capacity [Max]	3 kg
Reproducibility	0,00002 kg
Linearity	±
Adjustment options	Adjusting with external weight
Recommended adjusting weight	600 kg (F2)
Quantity scale - Item number	TKFU 600V20M-A
Stabilization time	2 s
Eccentric loading at 1/3 [Max]	0,00005 kg
Reference scale - Eccentric loading at 1/3 [Max]	60 mg
Quantity scale - Linearity	0,4 kg
Quantity scale - Eccentric loading at 1/3 [Max]	0,4 kg
Quantity scale - Reproducibility	0,2 kg
Reference scale - Reproducibility	30 mg
Reference scale - item number	CFS 3K-5
Reference scale - Linearity	100 mg
Construction type of the scale	Multi-range balance
Units	kg lb
Default unit	kg
Loadcell type	HBM PW6KRC3

Quantity scale - Readability [d]	0,2 kg
Quantity scale - Weighing capacity [Max]	600 kg
Reference scale - Readability [d]	10 mg

Display

Display type	LCD
Display backlight	✓
Display digit height	20 mm

Construction

Dimensions weighing surface (W×D)	840×1190 mm
Dimensions weighing surface	840×1190 mm
Dimensions weighing platform (W×D×H)	840×1190×90 mm
Material housing	plastic
Material weighing plate	metal, lacquered
Level indicator	✓
Levelling feet adjustable	✓
Cable length	1,5 m
Display device cable length	5 m

Functions

PreTare function	✓
Sum memory function	✓
Recipe/summing level	Sum A
Conversion function	✓
PLU - total	100
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Underfloor weighing	None
Counting function	✓
Counting resolution (laboratory conditions)	12.000.000
Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	50 mg
Smallest piece weight when piece counting - normal conditions	500 mg
Reference quantity	n (any number of pieces)
IP protection - display	IP23
IP protection - platform	IP65
IP protection - load cell	IP65
Memory function	✓

KERN CCS 600K-2U



Counting system to count the smallest parts in large quantities, maximum number of parts which can be displayed is 999,999

Auto-off interval(s) in battery mode/rechargeable battery mode	selectable
Tare function	manual (multi)
Number of keys for operation	20

Interface

Interfaces	RS-232 standard
------------	-----------------

Power Supply

Supplied power supply	Power supply unit
Power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH
Plug-in power supply / adapter for countries - optional	EURO AUS UK US CH
Input voltage power supply / power [Max]	220 V - 240 V AC, 50 Hz
Input voltage device / power [Max]	12 V, 500 mA
Power socket for mains adapter	Inside plus, outside minus
Battery / accumulator type	Pb
Rechargeable battery	GAB-A04
Rechargeable battery operating time - backlight on	70 h
Rechargeable battery operating time - backlight off	60 h
Rechargeable battery charging time	12 h
Rechargeable battery optional	Rchrg. battery optional

Environmental conditions

Ambient temperature [Min]	0 °C
Ambient temperature [Max]	40 °C
Humidity of environment [Min]	0 %
Humidity of environment [Max]	80 %
Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C

Approval

CE mark	✓
---------	---

Services (optional)

Article number for adjustment at the location of installation	abhängig von Auflösung/Max depends on resolution and capacity
Article number for DAkkS calibration	962-130-127
Article number for certificate of conformity	969-517

Packing & Shipping


Delivery time	4 d
Dimensions packaging (W×D×H)	860×130×500 mm
Shipping method	Freight
Net weight approx.	46 kg
Gross weight approx.	50 kg
Shipping weight	50 kg

Product information

GTIN/EAN number	4045761162518
Trade number	84238220
REACH classification	no prohibited substances

Pictograms

STANDARD

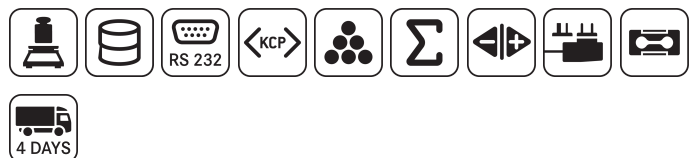

OPTION

