Revox Invisible Speaker


TECHNICAL DATA SHEET

Studio Sound Quality

INV UNIT

Panel loudspeakers installed invisibly under plaster, paint or wallpaper. Flat radiation characteristics. Full-range speaker with special polymer membrane equipped with high-performance subwoofer and exciter. Especially for invisible integration in drywall, solid construction, walls and ceilings.



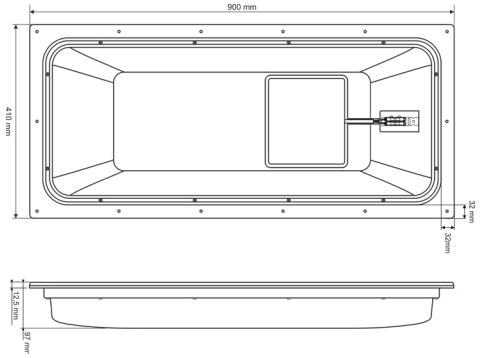

TECHNICAL DATA

	INV UNIT
Order Number	1.084.696.30
Dimensions L x W x D (mm)	900 x 410 x 97
Min. installation depth (mm)	90
Weight (kg)	8,5
Capacity (Watt)	max. 120 W RMS
Impedance (Ohm)	4
Sensitivity	82 dB/1W/1m
Frequency range	37 Hz - 23 kHz
Suitable for outdoors	X

EQUIPMENT

	INV UNIT
Installation frame available	✓
Sprue housing available	X
1K PU special adhesive	✓

Note: Coatings influence the efficiency. The installation instructions are to be taken into account for standard installations. Special fixtures after consultation with the sales consultant.

designed, developed and made in Germany

Revox Deutschland GmbH | Am Krebsgraben 15 | D-78048 Villingen-Schwenningen | Tel.: +49 7721 8704 0 | info@revox.de | www.revox.com
Revox (Schweiz) AG | Wehntalerstrasse 190 | CH-8105 Regensdorf | Tel.: +41 44 871 66 11 | info@revox.ch | www.revox.com
Revox Handels GmbH | Josef-Pirchl-Straße 38 | AT-6370 Kitzbühel | Tel.: +43 5356 66 299 | info@revox.at | www.revox.com

© Revox Group | TD-INV UNIT 07-21 | Subject to technical change without notice.