


DATASHEET

Extension Cable C14 180° - C13 180°, Black, 3.0 m, 3 x 1.00 mm², IEC Lock

IEC-LOCK

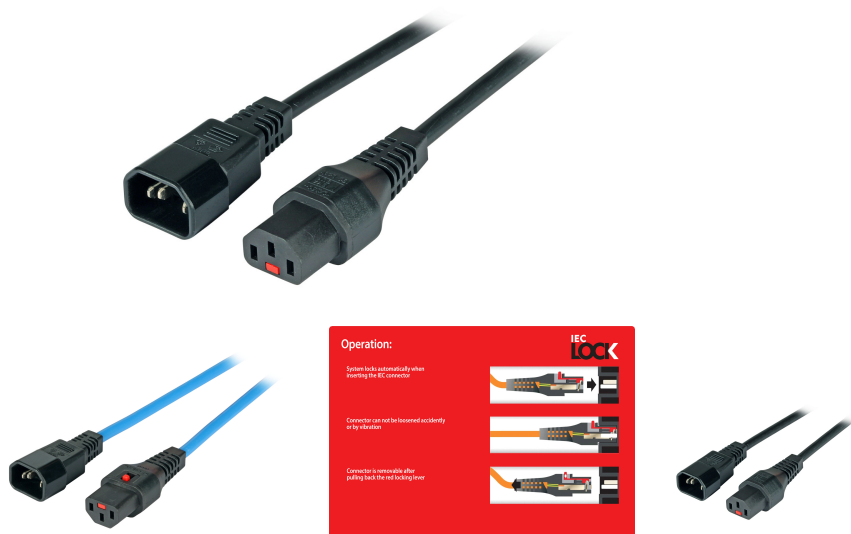

General data

With „IEC Lock“: prevents accidentally removing of the C13 jack from devices

After connecting, the C13 jack only can be released after sliding back the red latch

10 A / 250 V VDE tested (optional: orange, blue, grey, white)

Technical properties

Colour outer sheath	black
Connection 1	Cold device plug (IEC 60320)
Connection 2	Cold device plug straight, female
Halogen free	False
Jacket material	Polyvinyl chloride (PVC)
Nominal voltage	250 V
Number of cores	3
Oil resistant (acc. EN 60811-2-1)	False
Oil resistant (according to EN 60811-404)	False
Protective conductor	True
Spiralized cable	False
Type of packaging	Labeled polybag

This datasheet was created automatically on 22-07-2026 . Technical changes reserved.



DATASHEET

Extension Cable C14 180° - C13 180°, Black, 3.0 m, 3 x 1.00 mm², IEC Lock

With cord switch ☐ False

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Degree of protection	Length	Nominal cross section conductor	Outer diameter approx.
EK601SW.0,5	Extension Cable C14 180° - C13 180°, Black, 0.5 m, 3 x 1.00 mm², IEC Lock	black	IP20	0.5 m	1.0 mm²	7.1 mm
EK601SW.1	Extension Cable C14 180° - C13 180°, Black, 1.0 m, 3 x 1.00 mm², IEC Lock	black	IP20	1.0 m	1.0 mm²	7.1 mm
EK601SW.1,5	Extension Cable C14 180° - C13 180°, Black, 1.5 m, 3 x 1.00 mm², IEC Lock	black	IP20	1.5 m	1.0 mm²	7.1 mm
EK601SW.2	Extension Cable C14 180° - C13 180°, Black, 2.0 m, 3 x 1.00 mm², IEC Lock	black	IP20	2.0 m	1.0 mm²	7.1 mm
EK601SW.3	Extension Cable C14 180° - C13 180°, Black, 3.0 m, 3 x 1.00 mm², IEC Lock	black	IP20	3.0 m	1.0 mm²	7.1 mm

This datasheet was created automatically on 22-07-2026 . Technical changes reserved.

