

## Anex

## Thermaltake Toughpower GF3 1650W

Lab ID#: TT16502080  
 Receipt Date: Sep 22, 2022  
 Test Date: Oct 21, 2022

Report: 22PS2080A  
 Report Date: Oct 21, 2022

### DUT INFORMATION

Brand	Thermaltake
Manufacturer (OEM)	High Power
Series	Toughpower GF3
Model Number	TPD-1650AH3FSG
Serial Number	PSTPD1650FNFAGE4SL000342
DUT Notes	

### DUT SPECIFICATIONS

Rated Voltage (Vrms)	100-240
Rated Current (Arms)	20-16
Rated Frequency (Hz)	50-60
Rated Power (W)	1650
Type	ATX12V
Cooling	140mm Hydraulic Bearing Fan [TT-1425 (A1425S12S-2)]
Semi-Passive Operation	✓ (selectable)
Cable Design	Fully Modular

### TEST EQUIPMENT

Electronic Loads	Chroma 63601-5 x4 Chroma 63600-2 x2 63640-80-80 x20 63610-80-20 x2
AC Sources	Chroma 6530, Keysight AC6804B
Power Analyzers	N4L PPA1530 x2
Sound Analyzer	Bruel & Kjaer 2270 G4
Microphone	Bruel & Kjaer Type 4955-A
Data Loggers	Picoscope TC-08 x2, Labjack U3-HV x2
Tachometer	UNI-T UT372 x2
Digital Multimeter	Keysight U1273AX, Fluke 289, Keithley 2015 - THD
UPS	CyberPower OLS3000E 3kVA x2
Transformer	3kVA x2

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

## Anex

## Thermaltake Toughpower GF3 1650W

### RESULTS

Temperature Range (°C /°F)	30-32 / 86-89.6
ErP Lot 3/6 Ready	✓
(EU) No 617/2013 Compliance	✓
ALPM (Alternative Low Power Mode) compatible	✓
ATX 3.0 Ready	✓

### 115V

Average Efficiency	89.763%
Efficiency With 10W (≤500W) or 2% (>500W)	71.010
Average Efficiency 5VSB	77.744%
Standby Power Consumption (W)	0.0099000
Average PF	0.996
Avg Noise Output	45.58 dB(A)
Efficiency Rating (ETA)	PLATINUM
Noise Rating (LAMBDA)	None

### 230V

Average Efficiency	91.788%
Average Efficiency 5VSB	77.710%
Standby Power Consumption (W)	0.1067000
Average PF	0.981
Avg Noise Output	45.70 dB(A)
Efficiency Rating (ETA)	PLATINUM
Noise Rating (LAMBDA)	None

### POWER SPECIFICATIONS

Rail		3.3V	5V	12V	5VSB	-12V
Max. Power	Amps	25	25	137.5	3	0.3
	Watts	130		1650	15	3.6
Total Max. Power (W)		1650				

### HOLD-UP TIME & POWER OK SIGNAL (230V)

Hold-Up Time (ms)	11.3
AC Loss to PWR_OK Hold Up Time (ms)	8.4
PWR_OK Inactive to DC Loss Delay (ms)	2.9

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

### CABLES AND CONNECTORS

#### Modular Cables


Description	Cable Count	Connector Count (Total)	Gauge	In Cable Capacitors
ATX connector 20+4 pin (600mm)	1	1	16-22AWG	No
8 pin EPS12V (750mm)	1	1	16AWG	No
4+4 pin EPS12V (750mm)	1	1	16AWG	No
6+2 pin PCIe (600mm)	3	3	16AWG	No
6+2 pin PCIe (600mm+150mm)	3	6	16-18AWG	No
12+4 pin PCIe (600mm) (600W)	2	2	16-24AWG	No
SATA (600mm+150mm+150mm+150mm)	4	16	18AWG	No
4-pin Molex (600mm+150mm+150mm+150mm)	2	8	18AWG	No
FDD Adapter (150mm)	1	1	22AWG	No
AC Power Cord (1380mm) - C19 coupler	1	1	16AWG	-

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

### EFFICIENCY UNDER HIGH AMBIENT TEMPERATURE

**Efficiency: Thermaltake Toughpower GF3 1650W**  
Ambient: 37°C - 47°C (98.6°F - 116.6°F)

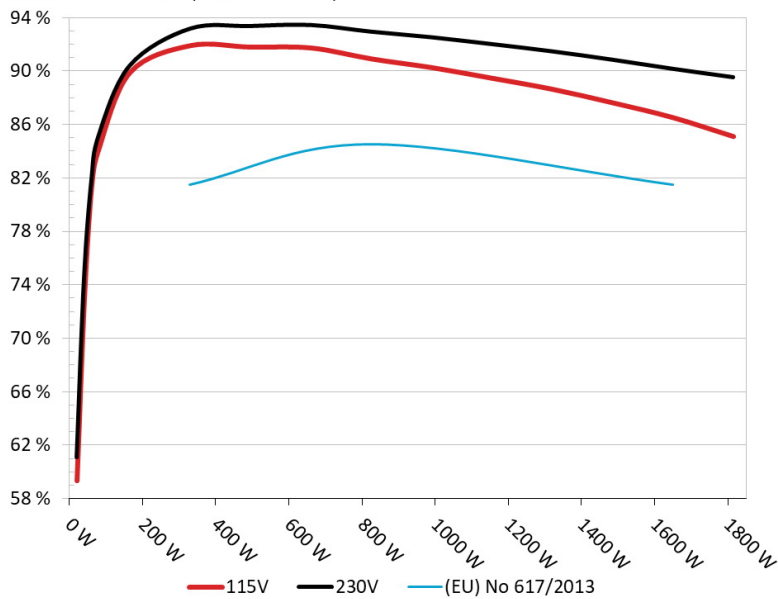


#### INFO

The PSU's efficiency under high ambient temperatures with 115V and 230V input. For this graph the results of the 10-110% load regulation table are used

### 5VSB EFFICIENCY

**5VSB Efficiency: Thermaltake Toughpower GF3 1650W**  
Ambient: 34°C - 36°C (93.2°F - 96.8°F)

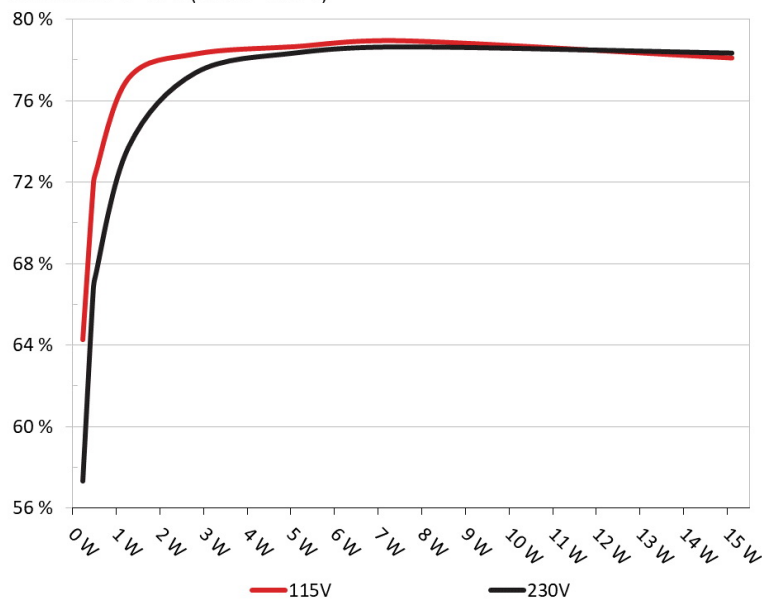

#### INFO

This graph depicts the efficiency levels of the 5VSB rail with 115V and 230V input

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

## Anex

## Thermaltake Toughpower GF3 1650W

### 5VSB EFFICIENCY -115V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.231W	64.282%	0.052
	5.125V	0.359W		115.17V
2	0.09A	0.461W	71.56%	0.09
	5.123V	0.645W		115.16V
3	0.55A	2.811W	78.284%	0.324
	5.11V	3.591W		115.15V
4	1A	5.098W	78.644%	0.405
	5.096V	6.483W		115.16V
5	1.5A	7.624W	78.924%	0.44
	5.081V	9.659W		115.16V
6	3A	15.098W	78.086%	0.491
	5.032V	19.334W		115.15V

### 5VSB EFFICIENCY -230V (ERP LOT 3/6 & CEC)

Test #	5VSB	DC/AC (Watts)	Efficiency	PF/AC Volts
1	0.045A	0.231W	57.345%	0.018
	5.125V	0.403W		230.38V
2	0.09A	0.461W	66.422%	0.03
	5.123V	0.695W		230.38V
3	0.55A	2.811W	77.385%	0.143
	5.11V	3.632W		230.37V
4	1A	5.097W	78.36%	0.223
	5.096V	6.504W		230.37V
5	1.5A	7.623W	78.658%	0.283
	5.081V	9.691W		230.37V
6	3A	15.106W	78.352%	0.369
	5.035V	19.278W		230.37V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Thermaltake Toughpower GF3 1650W

# 115V

All data and graphs included in this test report can be used by any individual on the following conditions:


- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

**PAGE 6/16**

### EFFICIENCY GRAPH 115V

#### INFO


This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

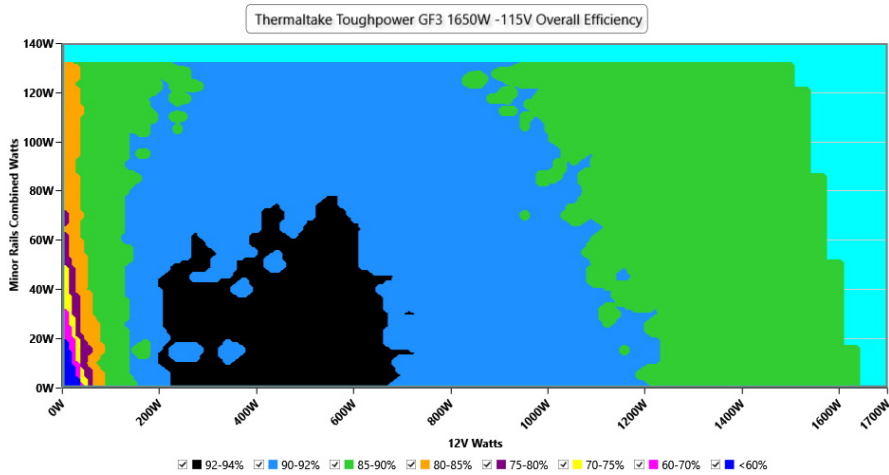

### NOISE GRAPH 115V

#### INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

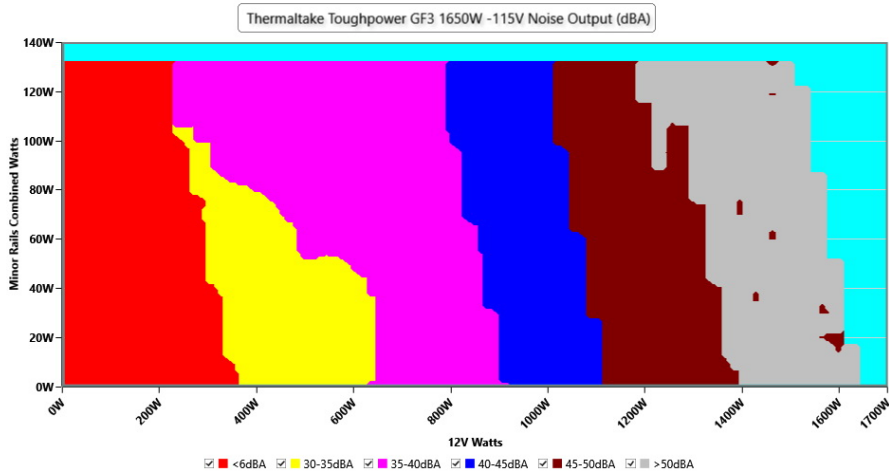

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

### VAMPIRE POWER -115V

#### Detailed Results

	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	115.16 V	115.15 V	113.85 V	115.18 V	116.15 V	PASS
Mains Frequency:	60.00 Hz	59.91 Hz	59.40 Hz	60.01 Hz	60.60 Hz	PASS
Mains Voltage CF:	1.415	1.415	1.340	1.416	1.490	PASS
Mains Voltage THD:	0.13 %	0.11 %	N/A	0.15 %	2.00 %	PASS
Real Power:	0.010 W	0.003 W	N/A	0.017 W	N/A	N/A
Apparent Power:	6.900 W	6.891 W	N/A	6.917 W	N/A	N/A
Power Factor:	0.001	N/A	N/A	N/A	N/A	N/A

#### INFO

*This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing*

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case



### 10-110% LOAD TESTS 115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	11.974A	1.997A	2A	0.985A	164.977	90.411%	0	<6.0	44.59°C	0.989
	11.973V	5.01V	3.3V	5.078V	182.431				40.25°C	115.12V
20%	25.017A	2.998A	3.002A	1.186A	329.997	92.42%	0	<6.0	45.61°C	0.996
	11.955V	5.004V	3.298V	5.059V	357.088				40.71°C	115.08V
30%	38.408A	3.503A	3.5A	1.389A	494.636	92.31%	1033	34.9	41.06°C	0.998
	11.940V	4.996V	3.301V	5.042V	535.838				46.32°C	115.04V
40%	51.890A	4.008A	3.995A	1.593A	659.856	92.248%	1038	35.0	42.87°C	0.998
	11.922V	4.992V	3.305V	5.023V	715.306				48.94°C	115V
50%	65.080A	5.017A	5.002A	1.8A	825.226	91.426%	1197	38.5	43.57°C	0.999
	11.904V	4.984V	3.299V	5.003V	902.653				50.21°C	114.96V
60%	78.240A	6.016A	6.009A	2.001A	989.732	90.778%	1377	42.1	43.69°C	0.999
	11.886V	4.989V	3.296V	4.983V	1090.276				50.79°C	114.91V
70%	91.510A	7.041A	7.015A	2.217A	1155.134	89.979%	1625	46.3	43.78°C	0.999
	11.868V	4.973V	3.294V	4.962V	1283.744				51.52°C	114.86V
80%	104.820A	8.003A	7.999A	2.326A	1319.745	89.155%	1807	49.2	44.17°C	0.999
	11.849V	4.976V	3.3V	4.945V	1480.286				52.52°C	114.83V
90%	118.596A	8.567A	8.486A	2.436A	1485.397	88.134%	1990	51.7	44.65°C	0.999
	11.829V	4.962V	3.299V	4.928V	1685.546				53.76°C	114.76V
100%	132.153A	9.081A	9.009A	3.068A	1650.282	87.025%	1987	51.7	46.1°C	0.999
	11.809V	4.957V	3.297V	4.889V	1896.279				56.19°C	114.71V
110%	145.622A	10.102A	10.109A	3.078A	1814.918	85.613%	1995	51.8	47.22°C	0.999
	11.788V	4.95V	3.294V	4.874V	2119.78				58.12°C	114.67V
CL1	0.119A	15.626A	15.604A	0A	131.326	82.901%	0	<6.0	48.25°C	0.98
	11.962V	5.011V	3.307V	5.095V	158.418				42.8°C	115.15V
CL2	0.117A	25.077A	0A	0A	126.408	79.404%	0	<6.0	50.07°C	0.986
	11.967V	4.985V	3.295V	5.109V	159.195				43.69°C	115.14V
CL3	0.117A	0A	24.997A	0A	83.898	75.09%	0	<6.0	52.26°C	0.978
	11.974V	4.994V	3.3V	5.092V	111.721				44.18°C	115.15V
CL4	139.621A	0A	0A	0.002A	1649.756	87.497%	1982	51.6	45.51°C	0.999
	11.816V	4.967V	3.293V	5.018V	1885.489				55.41°C	114.72V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

## Anex

## Thermaltake Toughpower GF3 1650W

### 20-80W LOAD TESTS 115V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.238A	0.498A	0.498A	0.195A	20	59.83%	0	<6.0	40.11°C	0.888
	12.000V	5.015V	3.313V	5.117V	33.639				36.97°C	115.15V
40W	2.725A	0.698A	0.699A	0.294A	39.999	73.345%	0	<6.0	40.71°C	0.941
	11.995V	5.014V	3.305V	5.112V	54.569				37.26°C	115.15V
60W	4.216A	0.898A	0.897A	0.392A	59.998	81.854%	0	<6.0	42.05°C	0.963
	11.985V	5.012V	3.309V	5.107V	73.307				38.29°C	115.14V
80W	5.702A	1.098A	1.097A	0.49A	79.958	84.698%	0	<6.0	42.99°C	0.97
	11.983V	5.009V	3.308V	5.102V	94.409				39.03°C	115.15V

### RIPPLE MEASUREMENTS 115V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	7.80mV	3.73mV	4.61mV	5.40mV	Pass
20% Load	6.98mV	4.60mV	6.14mV	6.58mV	Pass
30% Load	7.29mV	6.60mV	7.88mV	7.75mV	Pass
40% Load	8.17mV	5.42mV	7.98mV	9.43mV	Pass
50% Load	7.97mV	8.03mV	11.00mV	11.17mV	Pass
60% Load	8.73mV	10.02mV	12.33mV	11.98mV	Pass
70% Load	12.97mV	8.29mV	12.44mV	16.57mV	Pass
80% Load	12.36mV	15.72mV	17.71mV	17.28mV	Pass
90% Load	14.15mV	15.82mV	23.08mV	17.49mV	Pass
100% Load	17.75mV	16.02mV	29.12mV	20.97mV	Pass
110% Load	18.16mV	10.53mV	22.68mV	20.89mV	Pass
Crossload1	10.27mV	7.85mV	15.95mV	6.28mV	Pass
Crossload2	6.88mV	7.62mV	7.07mV	5.15mV	Pass
Crossload3	7.25mV	3.99mV	17.86mV	5.00mV	Pass
Crossload4	16.44mV	13.92mV	17.38mV	19.44mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Thermaltake Toughpower GF3 1650W


# 230V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

**PAGE 11/16**


### EFFICIENCY GRAPH 230V

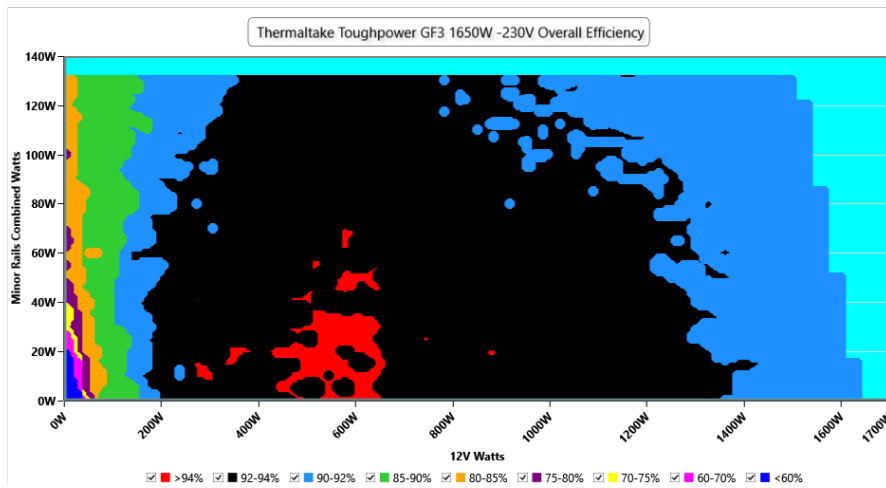

#### INFO

This graph depicts the PSU's efficiency throughout its entire operational range. For the generation of the efficiency and noise graphs we set our loaders to auto mode through our custom-made software before trying thousands of possible load combinations

### NOISE GRAPH 230V

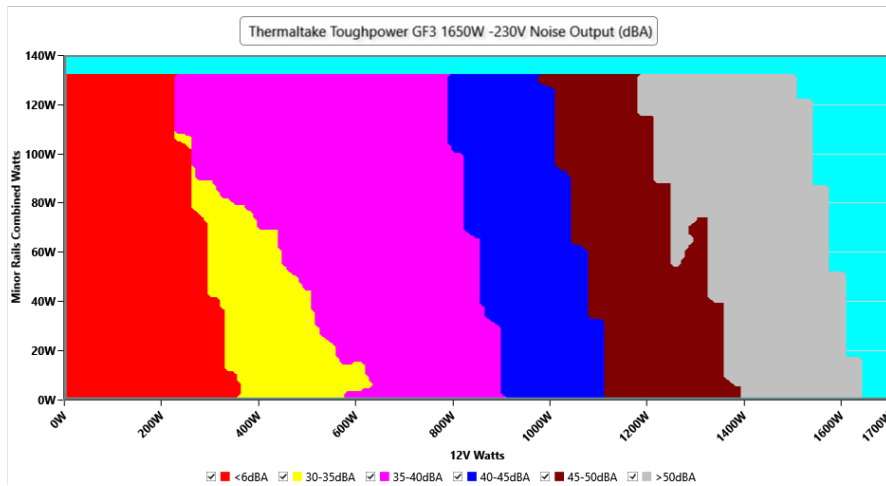

#### INFO

The PSU's noise in its entire operational range and under 30-32 °C ambient is depicted in this graph. The X axis represents the load on the +12V rail(s) while the Y axis is the load on the minor rails

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

Anex

Thermaltake Toughpower GF3 1650W

## VAMPIRE POWER -230V

### Detailed Results

	Average	Min	Limit Min	Max	Limit Max	Result
Mains Voltage RMS:	230.38 V	230.37 V	227.70 V	230.41 V	232.30 V	PASS
Mains Frequency:	50.00 Hz	50.00 Hz	49.50 Hz	50.00 Hz	50.50 Hz	PASS
Mains Voltage CF:	1.415	1.415	1.340	1.416	1.490	PASS
Mains Voltage THD:	0.14 %	0.13 %	N/A	0.16 %	2.00 %	PASS
Real Power:	0.107 W	0.082 W	N/A	0.162 W	N/A	N/A
Apparent Power:	23.116 W	23.090 W	N/A	23.139 W	N/A	N/A
Power Factor:	0.004	N/A	N/A	N/A	N/A	N/A

### INFO

*This graph is generated by the PPA Standby Power Analysis software which takes full control of the power analyzer during the whole procedure. This application features all of the EN50564 & IEC62301 test limits for standby power software testing*

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

PAGE 13/16

## Anex

## Thermaltake Toughpower GF3 1650W

### 10-110% LOAD TESTS 230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
10%	11.973A	1.998A	2A	0.985A	164.986	90.882%	0	<6.0	44.66°C	0.933
	11.975V	5.007V	3.3V	5.077V	181.495				40.28°C	230.39V
20%	25.015A	3A	3.002A	1.186A	330.011	93.649%	0	<6.0	45.59°C	0.97
	11.957V	5.001V	3.299V	5.058V	352.436				40.85°C	230.39V
30%	38.404A	3.506A	3.504A	1.389A	494.625	93.842%	1037	35.0	41.63°C	0.986
	11.941V	4.993V	3.296V	5.041V	527.011				46.77°C	230.37V
40%	51.881A	4.011A	3.994A	1.593A	659.831	93.92%	1042	35.1	41.82°C	0.992
	11.924V	4.988V	3.305V	5.022V	702.538				47.43°C	230.35V
50%	65.066A	5.023A	5.002A	1.8A	825.226	93.421%	1199	38.6	42.26°C	0.995
	11.906V	4.978V	3.299V	5.002V	883.329				48.32°C	230.33V
60%	78.224A	6.035A	6.006A	2.001A	989.703	93.003%	1381	42.2	42.6°C	0.997
	11.888V	4.972V	3.297V	4.982V	1064.322				49.69°C	230.3V
70%	91.488A	7.052A	7.014A	2.217A	1155.107	92.493%	1621	46.2	42.83°C	0.998
	11.870V	4.965V	3.294V	4.962V	1249.087				50.35°C	230.28V
80%	104.796A	8.003A	7.996A	2.326A	1319.621	91.951%	1765	48.6	43.14°C	0.998
	11.852V	4.961V	3.302V	4.945V	1435.222				51.21°C	230.26V
90%	118.558A	8.581A	8.485A	2.435A	1485.369	91.323%	1991	51.7	45.21°C	0.998
	11.832V	4.953V	3.3V	4.928V	1626.418				54.28°C	230.24V
100%	132.105A	9.098A	9.013A	3.068A	1650.217	90.641%	1989	51.7	45.85°C	0.999
	11.813V	4.947V	3.295V	4.89V	1820.457				55.9°C	230.22V
110%	145.500A	10.119A	10.102A	3.075A	1814.621	90.016%	1996	51.8	46.94°C	0.999
	11.796V	4.941V	3.296V	4.878V	2015.874				57.85°C	230.2V
CL1	0.117A	15.684A	15.604A	0A	131.312	83.494%	0	<6.0	48.76°C	0.918
	11.965V	4.992V	3.307V	5.096V	157.303				42.31°C	230.41V
CL2	0.117A	25.204A	0A	0A	126.403	79.757%	0	<6.0	50.45°C	0.921
	11.971V	4.959V	3.296V	5.109V	158.486				43.4°C	230.4V
CL3	0.117A	0A	24.989A	0A	83.895	75.986%	0	<6.0	52.6°C	0.878
	11.973V	4.997V	3.301V	5.094V	110.416				44.49°C	230.4V
CL4	139.616A	0A	0A	0.002A	1649.784	91.002%	1993	51.7	45.55°C	0.999
	11.816V	4.966V	3.293V	5.017V	1812.957				55.53°C	230.22V

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

## Anex

## Thermaltake Toughpower GF3 1650W

### 20-80W LOAD TESTS 230V

Test	12V	5V	3.3V	5VSB	DC/AC (Watts)	Efficiency	Fan Speed (RPM)	PSU Noise (dB[A])	Temps (In/Out)	PF/AC Volts
20W	1.238A	0.499A	0.498A	0.195A	20.005	61.579%	0	<6.0	40.14°C	0.53
	12.002V	5.013V	3.312V	5.117V	32.634				37.02°C	230.41V
40W	2.725A	0.698A	0.698A	0.294A	40.004	74.894%	0	<6.0	40.62°C	0.677
	11.998V	5.011V	3.311V	5.112V	53.617				37.35°C	230.41V
60W	4.215A	0.899A	0.897A	0.392A	60.002	82.231%	0	<6.0	41.45°C	0.763
	11.988V	5.009V	3.309V	5.107V	72.95				37.93°C	230.41V
80W	5.702A	1.099A	1.097A	0.49A	79.966	85.634%	0	<6.0	43.28°C	0.836
	11.986V	5.008V	3.309V	5.102V	93.649				39.53°C	230.4V

### RIPPLE MEASUREMENTS 230V

Test	12V	5V	3.3V	5VSB	Pass/Fail
10% Load	7.85mV	3.78mV	4.97mV	5.30mV	Pass
20% Load	6.67mV	4.86mV	6.19mV	6.52mV	Pass
30% Load	7.14mV	6.09mV	7.73mV	7.75mV	Pass
40% Load	8.05mV	6.03mV	8.04mV	9.33mV	Pass
50% Load	6.78mV	6.70mV	9.98mV	10.45mV	Pass
60% Load	8.68mV	9.31mV	12.23mV	11.98mV	Pass
70% Load	9.34mV	7.31mV	11.62mV	13.41mV	Pass
80% Load	10.27mV	8.64mV	17.30mV	15.09mV	Pass
90% Load	11.69mV	15.77mV	22.21mV	16.46mV	Pass
100% Load	15.86mV	16.24mV	28.42mV	19.20mV	Pass
110% Load	16.67mV	10.58mV	25.97mV	21.03mV	Pass
Crossload1	11.01mV	7.72mV	15.50mV	6.22mV	Pass
Crossload2	6.93mV	9.44mV	7.52mV	5.00mV	Pass
Crossload3	6.44mV	7.95mV	16.74mV	5.00mV	Pass
Crossload4	14.50mV	13.34mV	17.00mV	18.98mV	Pass

All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case

## Anex

## Thermaltake Toughpower GF3 1650W



Top side



Power specifications label

## CERTIFICATIONS 115V



## CERTIFICATIONS 230V



All data and graphs included in this test report can be used by any individual on the following conditions:

- > It should be mentioned that the test results are provided by Cybenetics
- > The link to the original test results document should be provided in any case