


ALTHEA15B 2-Port 20W GaN USB-PD-Ladegerät, USB-C x 1, USB-A x 1, QC 3.0, PPS

Product Images

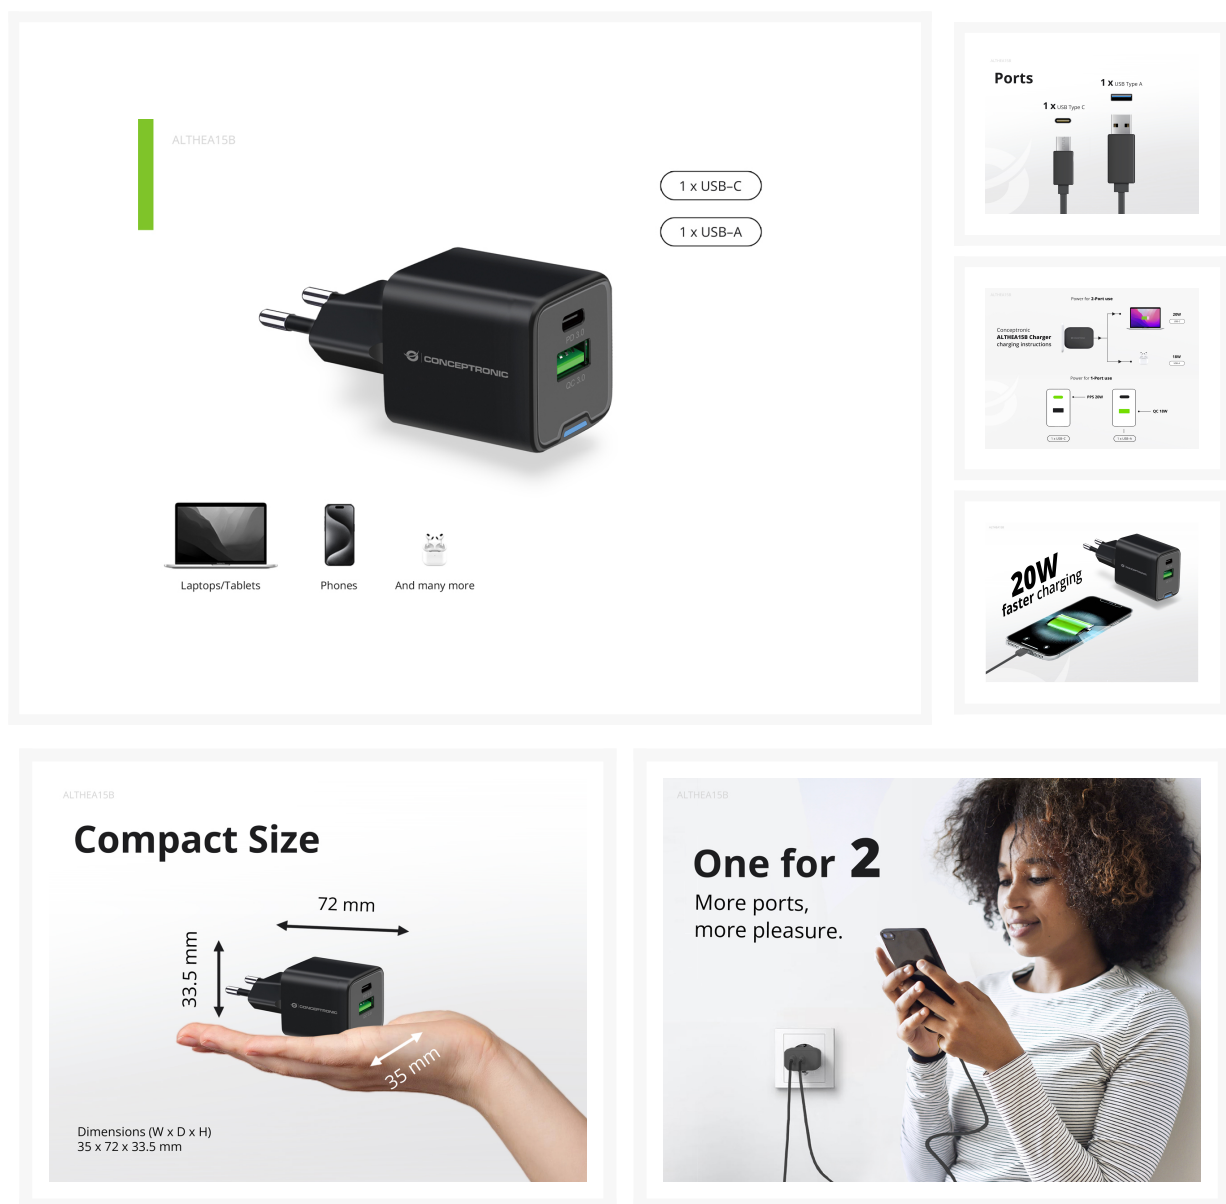

ALTHEA15B

Premium GaN-Technologie Your benefits:

- > GaN chargers are smaller
- > less heat during power transfer
- > more energy efficient



ALTHEA15W

Universal compability

Laptop



MacBook Pro



MacBook Air



Dell XPS 13

Tablet



iPad Pro / Air / Mini



Galaxy Tab S8 / S7 / A8

Smartphone



iPhone



HUAWEI Mate 60 Series



Galaxy



Google Pixel

And many more



AirPods / DJI / Canon / Gaming



Short Description

- USB-C Ausgang: DC 5.0V/3.0A, 9.0V/3.0A, 12.0V/2.5A, 15.0V/2.0A, 20.0V/1.5A (PD); 3.3-5.9V/3A, 3.3-11V/1.8A (PPS)
- USB-A-Ausgang: DC 5.0V/3.0A, 9.0V/3.0A, 12.0V/2.5A, 20.0V/1.5A (QC 3.0)
- USB-C + USB-A Ausgang: DC 5.0V/3.6A
- USB-Power-Delivery- (PD) 3.0-Technologie mit Schnellladefunktion
- Entspricht dem Programmable Power Supply (PPS) Standard zur Verbesserung der Ladeeffizienz und Reduzierung der Hitzeentwicklung
- Schutz gegen Überlastung, Kurzschluss und Überhitzung

Description

Der ALTHEA15B USB-Ladegerät bietet effizientes und schnelles Laden und verfügt über einen USB-Typ-C-Anschluss mit Power Delivery (PD)-Technologie, der Geräte wie Nintendo Switch, iPad, iPhone, Samsung usw. automatisch erkennt und mit einer Geschwindigkeit von bis zu 20 W auflädt. Das Ladegerät ist vor Überlastung, Kurzschluss und Überhitzung geschützt und mit einem kompakten und leichten Design ist es ein großartiges Reise- und Alltagsgerät.

Additional Information

Anzahl der Kartons pro Palette	16 piece
Volumen der Verpackung	340.474 cubic_centimeter
Länge der Palette	800 millimeter
Breite der Palette	1200 millimeter
Höhe der Palette	1800 millimeter
Power Plug Type.	EU
USB Power Delivery revision	3.0
Number of outputs.	2
USB Type-A ports quantity.	1
Fast charging technology.	Quick Charge 3.0, Power Delivery 3.0, Programmable Power Supply (PPS)
USB Type-C ports quantity.	1
Programmable power supply (PPS) (YES/NO).	Ja
Material des Gehäuses	Polycarbonate (PC)
Number of simultaneously connected devices (max).	2
Port 1 Power Output.	USB-C output: DC 5.0V/3.0A, 9.0V/2.22A, 12.0V/1.67A (PD); 3.3-5.9V/3A, 3.3-11V/1.8A (PPS)
Port 2 Power Output.	USB-A output: DC 5.0V/3.0A, 9.0V/2.0A, 12.0V/1.5A (QC 3.0)
Code des Harmonisierten Systems (HS)	850440
Zolltariflicher Warencode (TARIC)	8504408390
Menge pro Palette	1600 piece
Maximum AC Input.	240 volt
Minimum AC Input.	100 volt
Eingangsstrom	0.5 ampere
Maximum power.	20 watt

Power Protection Features.	Over current, Over power, Short circuit
Einhaltung der Nachhaltigkeit	Nein
Operating temperature (T-T) Max.	40 celsius
Operating temperature (T-T) Min.	0 celsius
Storage relative humidity (H-H) Max.	90%
Storage relative humidity (H-H) Min.	5%
Operating relative humidity (H-H) Max.	95%
Operating relative humidity (H-H) Min.	5%
Storage temperature (T-T) Max.	80 celsius
Storage temperature (T-T) Min.	-20 celsius
Menge pro Packung	1 piece
Tiefe des Pakets	172 millimeter
Höhe des Pakets	37 millimeter
Breite des Pakets	53.5 millimeter
Gewicht der Verpackung	15 gram
Zulassungen und Konformität	CE, ERP, RoHS, REACH
Operating humidity.	5% RH ~ 95% RH
Operating temperature.	0°C ~ 40°C
Inhalt des Pakets	Quick installation guide
Storage temperature.	-20°C ~ 80°C
Lieferumfang	ALTHEA15B Multilingual quick installation guide
Farbe	Schwarz
Modellnummer	ALTHEA15B
EAN	4015867236475
Dimensions (W x D x H).	33.5 x 38.5 x 30 mm
Produkt Höhe	30 millimeter
Produkt Breite	33.5 millimeter

Produkt Tiefe	38.5 millimeter
Produkt Gewicht	50.2 gram
Produktgewicht (kg)	0.0502
Eingangsspannung	AC 100.0-240.0V, 0.5A max, 50-60Hz

