


OVERVIEW

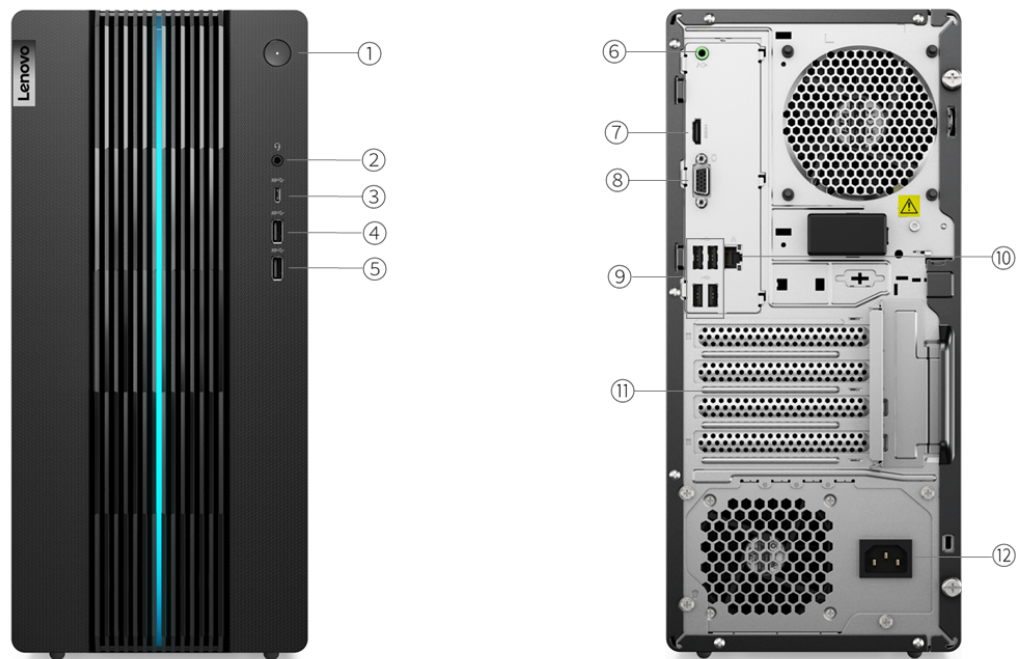

1. Power button	7. HDMI 1.4
2. Headphone / microphone combo jack (3.5mm)	8. VGA
3. USB-C 3.2 Gen 1	9. 4x USB 2.0
4. USB 3.2 Gen 1	10. Ethernet (RJ-45)
5. USB 3.2 Gen 2	11. Optional ports on expansion cards
6. Audio line-out (3.5mm)	12. Power connector

- Notes:
- Ports with * are only available on selected models
 - The onboard video ports VGA and HDMI are disabled on the models with discrete graphics

PERFORMANCE

Processor

Processor Family

AMD Ryzen™ 5 / 7 Processor

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Ryzen 5 5600G	6	12	3.9GHz	4.4GHz	3MB L2 / 16MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen 7 5700G	8	16	3.8GHz	4.6GHz	4MB L2 / 16MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 7 5800	8	16	3.4GHz	4.6GHz	4MB L2 / 32MB L3	DDR4-3200	-

Operating System

Operating System

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- No operating system

Graphics

Graphics^[1]

Graphics	Type	Memory	Boost Clock	TGP	Connector	Max Resolution	Key Features	Remark
AMD Radeon Graphics	Integrated	Shared	-	-	1x HDMI® 1.4, 1x VGA	3840x2160@30Hz(HDMI), 2048x1536@50Hz(VGA)	DirectX® 12	-
AMD Radeon RX 6400	Discrete	4GB GDDR6	-	-	1x HDMI 2.1, 1x DP 1.4	7680x4320@60Hz(HDMI), 7680x4320@60Hz(DP)	DirectX 12	-
AMD Radeon RX 6500XT	Discrete	4GB GDDR6	-	-	1x HDMI 2.1, 1x DP 1.4	7680x4320@60Hz(HDMI), 7680x4320@60Hz(DP)	DirectX 12	-
NVIDIA® GeForce GTX 1660 SUPER	Discrete	6GB GDDR6	-	-	1x HDMI 2.0, 1x DP 1.4, 1x DVI-D	4096x2160@60Hz(HDMI), 5120x3200@60Hz (DP), 2560x1600@60Hz(DVI-D)	DirectX 12	-
NVIDIA GeForce RTX™ 3060	Discrete	12G GDDR6	-	-	1x HDMI 2.1, 3x DP 1.4	7680x4320@60Hz(HDMI), 5120x2880@60Hz(DP)	DirectX 12	-
NVIDIA GeForce RTX 3060 Ti	Discrete	8G GDDR6	-	-	3x DP 1.4a, 1x HDMI 2.1	7680x4320@60Hz(HDMI), 7680*4320@120Hz(DP)	DirectX 12	-

Notes:

1. The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to processor section)

Monitor Support

Monitor Support

Supports up to 2 independent displays via onboard ports (VGA and HDMI), more displays support via discrete graphics

Chipset

Chipset

AMD PRO 565 chipset

Memory

Max Memory^[1]

Up to 64GB DDR4-3200

Memory Slots

Two DDR4 UDIMM slots, dual-channel capable

Memory Type

DDR4-3200

Memory Protection

Non-ECC

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

Up to two drives, 1x 3.5" HDD + 1x M.2 SSD

- 3.5" HDD up to 2TB
- M.2 SSD up to 1TB

Storage Type

Disk Type	Interface	RPM	Offering	Security
3.5" SATA HDD	SATA 6Gb/s	7.2K	-	-
M.2 2280 SSD	PCIe® NVMe®, PCIe 3.0 x4	-	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4	-	-	-

RAID

No support

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

Removable Storage

Optical

None

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC222 codec

Speakers

No speakers

Microphone

No microphone

Camera

No camera

Power Supply

Power Supply

Power	Type	Efficiency	Key Features
310W	Fixed	92%	100-240V, 50-60Hz
380W	Fixed	92%	100-240V, 50-60Hz
500W	Fixed	92%	100-240V, 50-60Hz

DESIGN

Input Device

Keyboard

- Lenovo Calliope Keyboard (USB connector), black
- No keyboard

Mouse

- Lenovo Calliope Mouse (USB connector), black
- No mouse

Mechanical

Form Factor

Tower (17L)

Dimensions (WxDxH)

376 x 170 x 288 mm (14.8 x 6.69 x 11.33 inches)

Packaging Dimensions (WxDxH)

270 x 525 x 395 mm (10.62 x 20.66 x 15.55 inches)

Weight

7.55 kg (16.64 lbs)

Packaging Weight

All models: 10.55 kg (23.25 lbs)

Case Color

Raven black

Bays

- 1x 3.5" disk bay (optional)
- No bays

Expansion Slots

- One PCIe 3.0 x1, full height
- One PCIe 3.0 x16, full height
- Two M.2 slots (one for WLAN, one for SSD)

Cooling System (Fan & Cooler)

- (Optional) 1x front system fan, 1x rear system fan
- (Optional) 1x rear system fan

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, 1x RJ-45

WLAN + Bluetooth^[1]

- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 card
- No WLAN and Bluetooth

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation

Ports^[1]

Front Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 2
- 1x USB-C® 3.2 Gen 1
- 1x headphone / microphone combo jack (3.5mm)

Rear Ports^[2]

- 4x USB 2.0
- 1x VGA
- 1x HDMI 1.4
- 1x Ethernet (RJ-45)
- 1x audio-out (3.5mm)
- 1x power connector

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt™ 3/4: 40 Gbit/s
2. For video ports on discrete graphics, please see graphics section

SECURITY & PRIVACY

Security

Security Chip

Firmware TPM 2.0 integrated in processor

BIOS Security

- Administrator password
- Power-on password
- Hard disk password

SERVICE

Warranty^[1]

Base Warranty

- 1-year courier or carry-in service
- 1-year mail-in service
- 1-year limited onsite service
- 2-year courier or carry-in service
- 3-year courier or carry-in service
- OB

Notes:

1. The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ENVIRONMENTAL

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications

Green Certifications

- ErP Lot 3 and Lot 7
- RoHS compliant

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD



AMD



AMD



AMD



AMD



AMD