


# Delock External Enclosure M.2 SSD 80 mm > SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female

## Description

The aluminium enclosure by Delock enables the installation of a M.2 SSD in 2280, 2260, 2242 and 2230 format, which can be connected via USB to the PC or laptop.

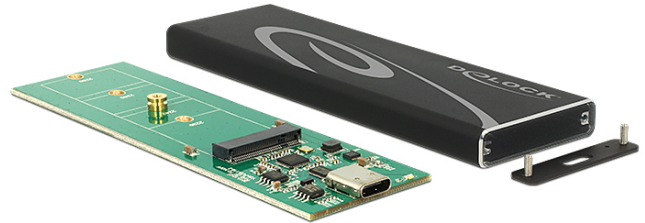

## Specification

- Connector:
  - external: 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
  - internal: 1 x 67 pin M.2 key B slot
- Chipset: Asmedia ASM1351
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B based on SATA
- Maximum height of the components on the module: 1.35 mm application of double-sided assembled modules supported
- Data transfer rate up to 6 Gbps
- LED indicator for power and access
- Dimensions (LxWxH): ca. 126 x 40 x 10 mm
- Hot Plug, Plug & Play

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Mac OS 10.8, Linux Kernel 2.6
- PC or laptop with a free USB Type-A port

## Package content

- External enclosure M.2
- Screwdriver
- Mounting material
- USB 3.1 Type-A to USB-C™ cable (ca. 50 cm)
- User manual

## Item No. 42574

EAN: 4043619425747

Country of origin: China

Package: Box



## Images



General	
Funktion:	Hot Plug Plug & Play
Supported operating system:	Linux Kernel 2.6 Mac 10.8.2 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported
Interface	
External:	1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
Internal:	1 x 67 pin M.2 key B slot
Technical characteristics	
Chipset:	Asmedia ASM1351
Data transfer rate:	6 Gb/s
Physical characteristics	
Colour:	black
Length:	126 mm
Width:	40 mm
Height:	10 mm