



FlexScan[®]
Business Monitor Solutions



Now, find your workstyle.

Both performance and environmental consciousness are important in today's society.

FlexScan combines cutting-edge technology with sustainable design to achieve the ideal in workstyle innovation.

Whether it be in the office or at home, FlexScan enables business professionals to achieve comfort and efficiency while staying kind to the environment.

Now, find your workstyle.



FlexScan[®]



Open-Plan Office



Satellite Office
















Telecommuting



Hybrid Work

Find the Solution that Suits Your Workstyle Needs

		Premium						New Standard			Basic			
		<ul style="list-style-type: none"> I need a stable network connection for web meetings <i>See page 9</i> 												
					<ul style="list-style-type: none"> I need to use multiple monitors with less cable clutter <i>See page 9</i> 									
		<ul style="list-style-type: none"> Having my battery always fully charged allows me to focus on work <i>See page 8</i> 									I'm using a desktop PC and need a good monitor			
		<ul style="list-style-type: none"> I prefer to work with an external mouse and keyboard when using my laptop <i>See page 8</i> 												
		Eye care and ergonomics are important to me <i>See pages 10 - 12</i>												
		I want to coordinate the monitor with the space <i>See pages 6 - 7</i>												
Inputs	USB Type-C®	✓	✓	✓	✓	✓	✓	✓	✓	✓				
	• Network Connection	✓	✓	✓	✓	✓	✓							
	• Daisy Chain				✓	✓	✓							
	• Power Delivery	✓	✓	✓	✓	✓	✓	✓	✓	✓				
	• Connect Peripherals	✓	✓	✓	✓	✓	✓	✓	✓	✓				
	DisplayPort™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	HDMI®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	DVI-D										✓	✓	✓	
	D-Sub mini 15 pin											✓	✓	✓
Eye Care Functions	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Frameless	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Color	White / Black	White / Black	White / Black	White / Black	White / Black	White / Black	White / Black	White / Black	White / Black	White / Black	White / Black	White / Black	White / Black	
USB Ports	4	4	4	4	4	4	4	4	4	4	2	4	2	
Panel Size	37.5"	31.5"	27"	27"	24.1"	23.8"	27"	24.1"	23.8"	27"	24.1"	23.8"	22.5"	
Native Resolution	UWQHD+ 3840×1600	4K 3840×2160	4K 3840×2160	WQHD 2560×1440	WUXGA 1920×1200	Full HD 1920×1080	WQHD 2560×1440	WUXGA 1920×1200	Full HD 1920×1080	WQHD 2560×1440	WUXGA 1920×1200	Full HD 1920×1080	WUXGA 1920×1200	
		NEW 	NEW 											
	EV3895	EV3240X	EV2740X	EV2795	EV2495	EV2490	EV2781	EV2485	EV2480	EV2760	EV2456	EV2460	EV2360	

See pages 20 - 23 for a detailed list and specifications of the complete FlexScan lineup, including square and wide monitors.

Bask in Beauty

NEW FlexScan EV3240X / EV2740X



Aesthetically Pleasing Design

Bezels that are Barely There

These monitors are virtually frameless. Even with the black borders along the perimeter of the LCD there is very little distance between the display area of each screen in a multi-monitor configuration which makes for almost seamless viewing.


Color Coordination

The monitor is available in white, for a brighter office environment, or black, for a sleek and stylish mood. The cables and stand also come in matching colors for a fully coordinated look.



Reach Your Full Potential in 4K

The EV3240X / EV2740X support 4K (3840 x 2160 pixel) resolution, displaying four times the amount of information than standard Full HD (1920 x 1080 pixel) monitors. With 4K, you can display more applications simultaneously on a single screen, greatly reducing the need to scroll or switch windows frequently.

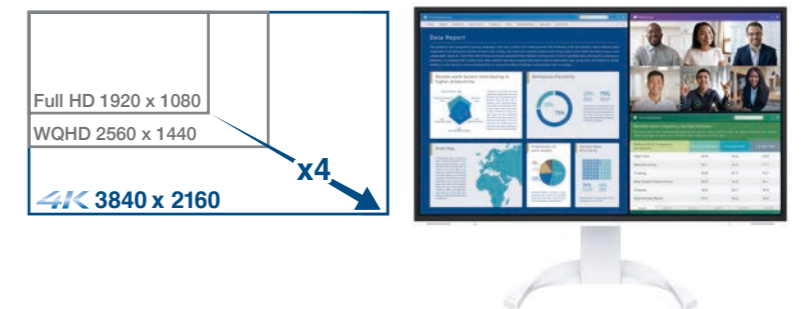

Visualize your Workspace with AR



EV3240X



EV2740X




Streamlined Connection with USB Type-C



A Better Working Experience

USB Type-C compatible monitors make it faster and easier to connect a laptop when moving between workstations, or when working away from the office.

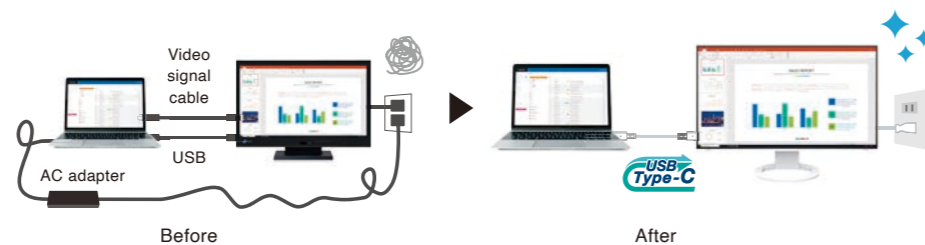

Power Delivery

Power delivery via USB Type-C reliably charges laptops and small desktop PCs. This eliminates the need for a laptop's bulky power supply unit, freeing up desk space.



Connect Peripherals

Laptops often have limited connectivity options for peripherals. Connecting to a USB Type-C compatible monitor gives access to a hub with multiple USB Type-A ports for easily connecting an external keyboard, mouse, web camera, or storage device.



Compatible Models EV3895 / EV3240X / EV2740X / EV2795 / EV2495 / EV2490 / EV2781 / EV2485 / EV2480

[? Visit Our Website](#) | Infographic: "What is USB Type-C?" [»»»](#)

Network Connection

While many modern laptops are not equipped with a dedicated LAN port, a USB Type-C compatible monitor with a built-in LAN adapter provides users with access to the network via the monitor. This allows users to conduct conference calls or data transfers reliably and at high speed.



Compatible Models EV3895 / EV3240X / EV2740X / EV2795 / EV2495 / EV2490


Protecting Network Security in Shared Workspaces

Social change has led to a diversification of workspace models and workstyles. More companies are adopting shared office spaces, conference rooms, and meeting spaces. EIZO MAC Address Clone Utility software is available to enable the convenient use of wired LAN functions in a secure environment through MAC address authentication when using EIZO LAN port monitors in such spaces. *Supports Windows OS only.*



Daisy Chain

With a daisy chain users can connect multiple monitors via a single video signal output. Connecting monitors in a daisy chain simplifies cable management, tidying up the back of the desk for an even cleaner office aesthetic.

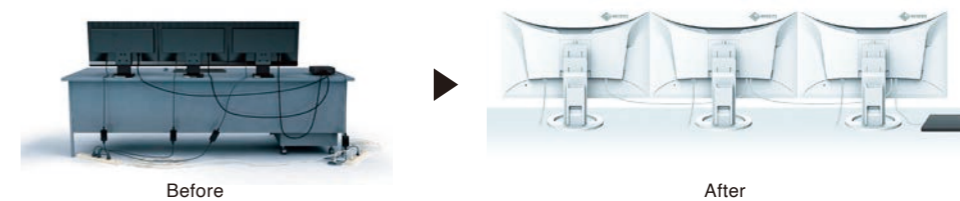

Compatible Models EV2795 / EV2495 / EV2490

[? Visit Our Website](#) | What do I need to know about daisy chaining? [»»»](#)


Say Goodbye to Tired Eyes



Glare Reduction

Anti-Glare Coating

FlexScan monitors are treated with an anti-glare coating to reduce screen reflections caused by ambient lighting. The coating scatters incoming light, reducing the amount of light reflected into your eyes.

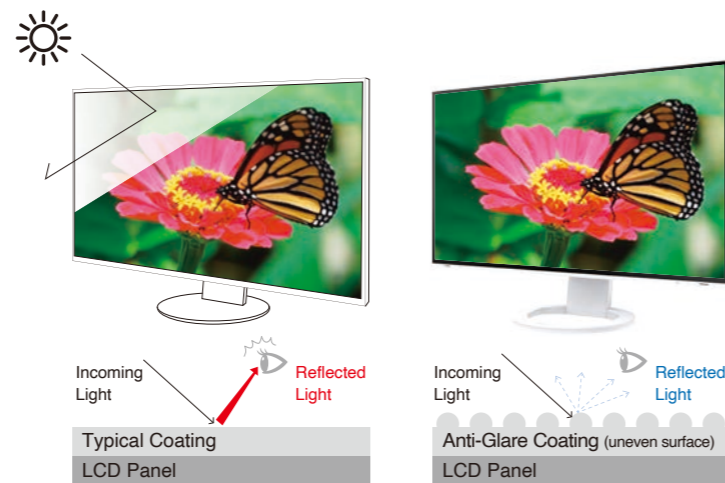

Flicker-Free Viewing

EyeCare Dimming Mode

In low brightness ranges, users may perceive flicker on a typical LED backlight, causing eye fatigue and often headaches. EyeCare is a dimming function that cuts flicker to a degree that human eyes cannot detect, reducing eye fatigue and flicker-related headaches, without affecting color stability of the monitor.



FlexScan monitors are certified by TÜV Rheinland to have low blue light and be flicker-free.



Auto Brightness Control

Always the Ideal Brightness



The Auto EcoView function automatically adjusts the brightness of your monitor according to ambient lighting. This ensures your monitor is always at the optimal brightness for reducing eye fatigue.



Blue Light Reduction

Paper Mode

Do you find that your screen is often too bright to read text comfortably? FlexScan monitors are equipped with Paper Mode which reduces blue light to simulate paper, making it less straining on your eyes. When used in conjunction with the Auto EcoView function, blue light is even further reduced.

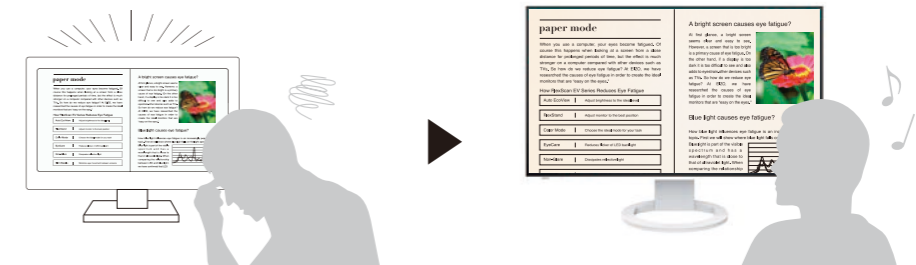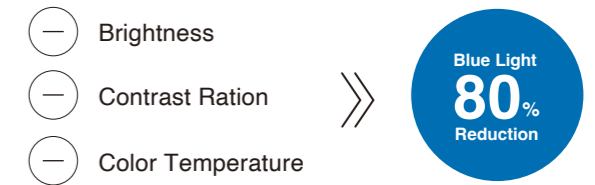

Stable Image Even at Low Brightness

Reduce Brightness to Approximately 1 cd/m²

Frameless and wide monitors can be adjusted to a brightness of approximately 1 cd/m² without negatively impacting the color or stability of the screen.



[Visit Our Website](#) | "The Latest on Computer Screens and Eye Fatigue"

[Visit Our Website](#) | "Designed to Protect Your Eyes"

The Perfect Position




Space-Saving Positioning

For the most limited workspaces, a laptop can fit comfortably under the monitor with the stand at maximum height. This allows you to use the laptop as a second screen without taking up valuable desktop space.

The specific movement ranges of stands varies by model. See pages 20 - 23 for specifications of all monitors.


■ EV2480

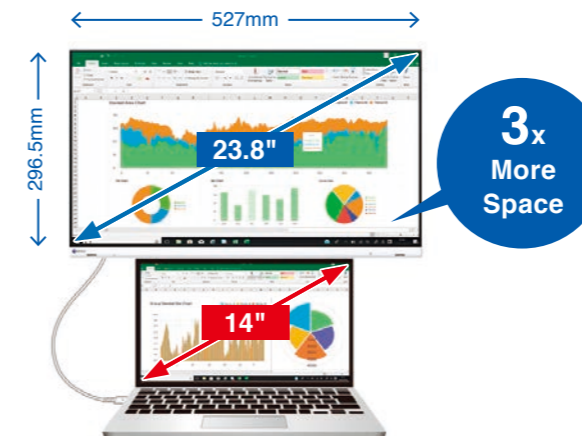

Portrait Mode

View web pages and documents easily by switching the monitor to portrait mode simply by rotating the screen.

The specific movement ranges of stands varies by model. See pages 20 - 23 for specifications of all monitors.

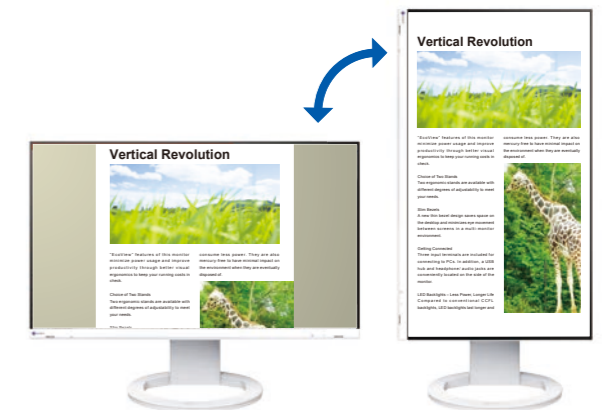


Versatile Stand

The stands feature height adjustment, tilt, and swivel, while saving space and remaining stylish. Quickly and smoothly adjust your monitor to the perfect position.


The specific movement ranges of stands varies by model. See pages 20 - 23 for specifications of all monitors.

■ EV2795 / EV2781

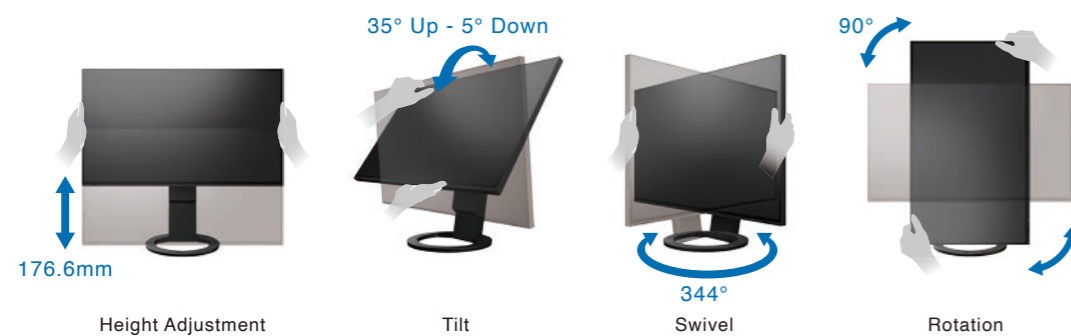

Wide Height Adjustment Range


The ergonomic stand allows you to adjust the monitor to the most comfortable position suited for the workplace or home office.

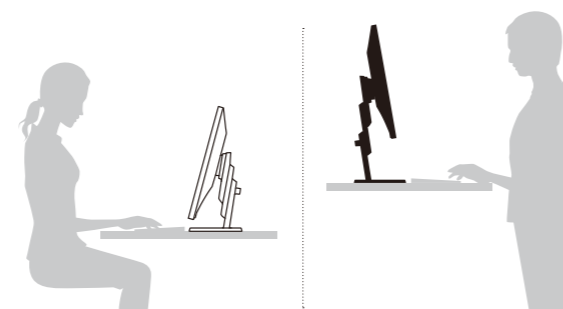

Free Up Your Workspace

VESA-compliant stand brackets let you easily mount a client terminal such as a thin client or mini PC to the back of the monitor. The space the client terminal previously occupied is now freed up so you can make better use of your desktop. Even with the client terminal attached you can adjust the monitor's stand freely.

Please check EIZO website for supported models.

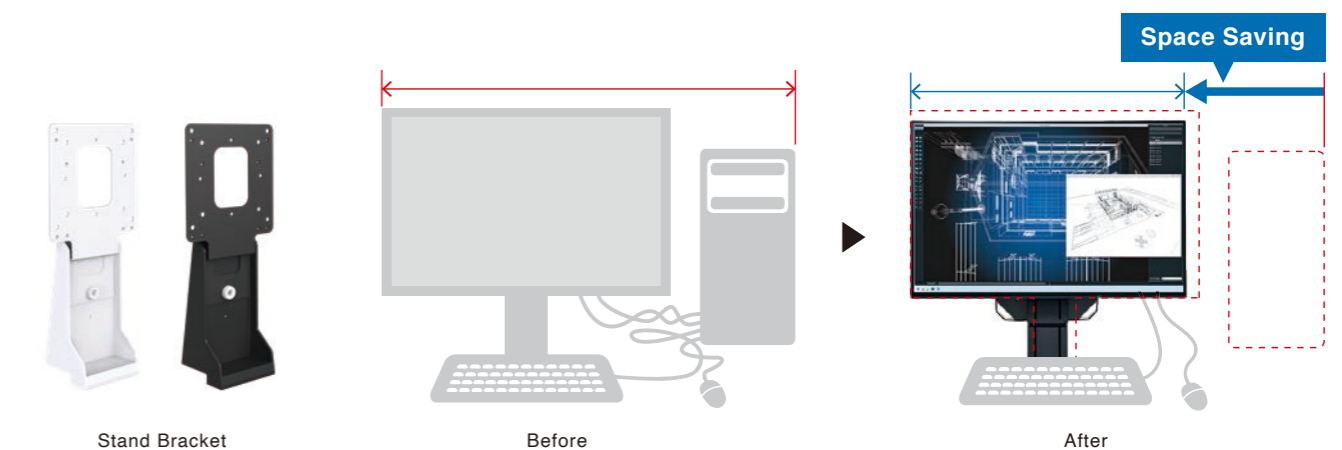


Intelligent Software to Work Better

SCREEN INSTYLE

EIZO's free Screen InStyle software automatically optimizes your monitor to make your user environment more comfortable.

See pages 20 - 23 for compatible monitors.

Compatible OS Windows 11 / 10

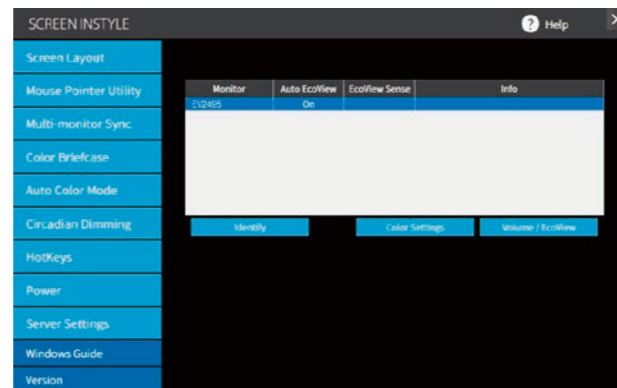

Automatically Change the Color Mode for Each Application

Auto Color Mode


FlexScan monitors have multiple color modes designed for different uses. Use the Auto Color Mode to assign a color mode to turn on when using specific applications such as those for writing documents, photo viewing, creating illustrations or watching movies. When an application is opened the screen will automatically switch to the assigned color mode, making manual switching unnecessary.



Organize Your Desktop to Increase Work Efficiency

Screen Layout


This function allows you to divide the desktop and arrange each program's window neatly across the screen to help you work smart and efficiently.

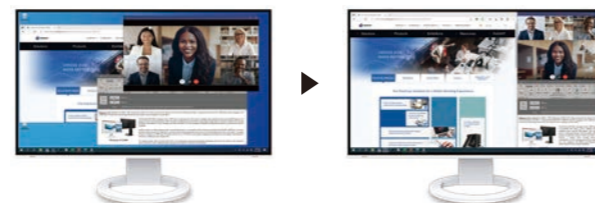

Easily Switch Between Inputs / Color Modes

Assign Hotkeys for Switching Input Signals and Color Modes


You can assign keyboard hotkeys to switch between color modes or input signals of two PCs connected to your monitor.

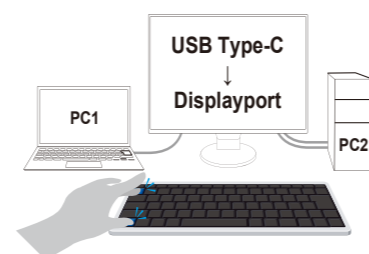

Multi-Monitor Convenience


Synchronize Screen Adjustments

When using multiple monitors, save time by synchronizing all the monitors with each other. If you change the color mode, brightness or color temperature of one monitor, the rest will automatically change to the same.

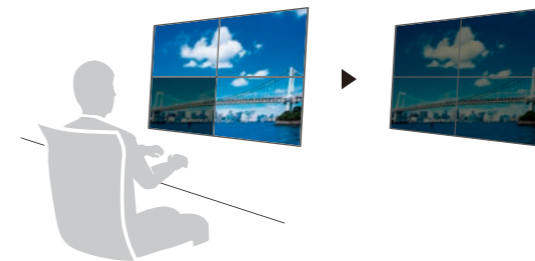

On/Off All at Once

When one monitor's power is turned off, all other monitors will also turn off. Save energy by easily turning off all monitors at once.

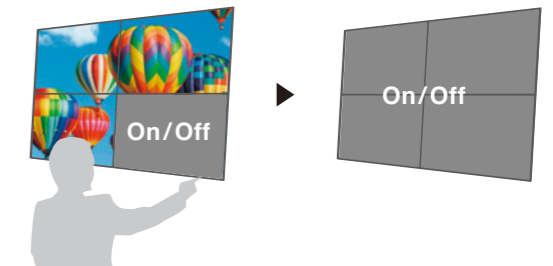


Screen InStyle Server

Effectively Monitor Asset Management

Automatically Receive Monitor or PC Information


With Screen InStyle Server receive information such as the model name and serial number of any monitor connected to your network. Additionally, see information from the computer that each monitor is connected to, such as the OS, IP address and computer name.

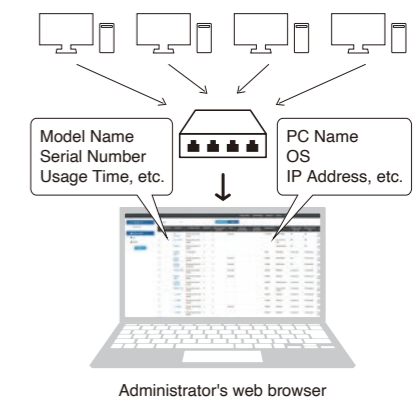

Control Settings on Multiple Monitors at Once


Manage Multiple Monitors from One Location

Control multiple monitors' settings such as color mode, brightness, and eco functions from a remote location. Furthermore, prevent unintended setting changes by locking the operation switch.



Conserve Power with Central Management

Manage various power settings of networked PCs and monitors. Set the monitor to turn off or the PC to sleep after a set period of inactivity.

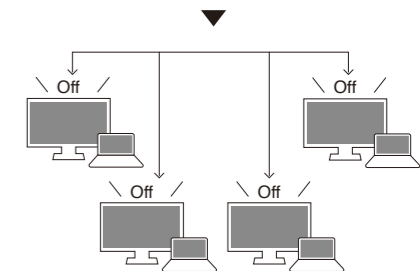

Improve Security with Automatic Locking

Improve office security by setting networked PCs to automatically lock after a certain period of inactivity. This ensures the PC remains secure after the user leaves their desk.

Download Screen InStyle and Screen InStyle Server >>>



Care for the Environment



Sustainable Monitor Design

Achieving a sustainable society where we do no harm to the environment nor waste precious resources is an important initiative for businesses and communities. FlexScan Sustainable Monitors are at the forefront of EIZO's efforts to contribute to this sustainable future.

Learn more about EIZO Sustainable Monitors



Conserve to Preserve

FlexScan Sustainable Monitors include models which are made of more than 80% recycled plastic. This cuts down on the amount of plastic waste going into the environment, conserves resources, and promotes reuse of materials for preserving our natural ecosystems.



Effortlessly Save on Power Consumption

FlexScan Sustainable Monitors' Auto EcoView function automatically adjusts the screen's brightness according to changes in the ambient lighting. The EcoView Optimizer 2 function fine-tunes the balance between brightness and gain according to the content displayed on the screen. These proprietary EcoView technologies cut power consumption by as much as 50%* compared to displaying at maximum brightness.

*Typical power consumption when not using USB power delivery



Visit Our Website

"How Green is Your Monitor?" Eco Calculator



Cushioning Environmental Impact

Starting with the most recent models, FlexScan Sustainable Monitors are moving away from using plastic and styrofoam in the packaging to reduce environmental impact. The monitors are safely packed using molded pulp, which is made from recycled cardboard and newspaper, and cables are wrapped in paper instead of plastic bags.



Collective Environmental Consciousness

EIZO offers corporate customers an option for collective packaging, where multiple monitors can be packed together in a single box. We can also leave out any unneeded stands or cables. This reduces the amount of packaging materials used, improves loading efficiency, and significantly reduces unpacking and installation time, leading to less overall waste.



Certified Sustainable

EIZO complies with international laws and regulations regarding environmental protection and effective use of energy. In addition, FlexScan Sustainable Monitors meet the latest environmental standards, such as ENERGY STAR®, EPEAT, and TCO Certified Generation 9.



Our Contribution to SDGs

As part of its corporate social responsibility (CSR) activities, EIZO is contributing towards the United Nations' Sustainable Development Goals (SDGs).

SUSTAINABLE DEVELOPMENT GOALS



Visual Technology Company



50+ Years of Expertise

Innovative Solutions

Extensive Market Reach

Built-In Color Calibration Sensors



Automatically calibrates while you work

IP Decoding Solutions



Visibility Enhancement Technology




Market-Focused Cloud Solutions



Software for Improved Workflow



Use a single mouse across two PCs

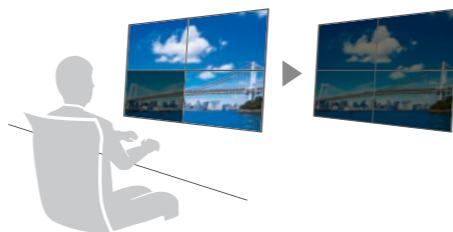

Synchronized adjustment of multiple monitors



Simplified CMS with automatic software and printer settings adjustment




FlexScan

Business Enterprise



ColorEdge

Creative Work

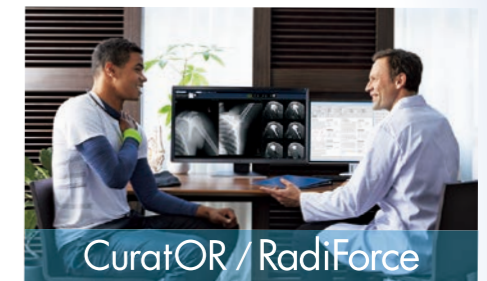

CuratOR / RadiForce

Healthcare



Global Reach



Research and Development



Manufacturing



Quality Control



Customization



DuraVision

Security & Surveillance / Maritime



Raptor / Re/Vue / SafeGuard

Air Traffic Control

FlexScan
Specifications



EV2760



EV2456



EV2460



EV2360



EV2430



S2133



S1934



S1703-A



S1504

		Basic						
Model Variations	With Stand	Black	EV2760-BK	EV2456-BK	EV2460-BK	EV2360-BK		
		Gray	-	-	-	-		
		White	EV2760-WT	EV2456-WT	EV2460-WT	EV2360-WT		
		Without Stand	Black	EV2760-FBK	EV2456-FBK	EV2460-FBK	EV2360-FBK	
		Gray	-	-	-	-		
		White	EV2760-FWT	EV2456-FWT	EV2460-FWT	EV2360-FWT		
Panel	Type	IPS	IPS	IPS	IPS			
	Backlight	LED	LED	LED	LED			
	Size	27.0" (68.5 cm)	24.1" (61.1 cm)	23.8" (60.5 cm)	22.5" (57.2 cm)			
	Native Resolution	2560 x 1440 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1080 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)			
	Viewable Image Size (H x V)	596.7 x 335.7 mm	518.4 x 324 mm	527 x 296.5 mm	488.2 x 297.2 mm			
	Pixel Pitch / Pixel Density	0.233 x 0.233 mm / 109 ppi	0.270 x 0.270 mm / 94 ppi	0.275 x 0.275 mm / 93 ppi	0.254 x 0.248 mm / 101 ppi			
	Display Colors	16.77 million	16.77 million	16.77 million	16.77 million			
	Viewing Angles (H / V, typ.)	178° / 178°	178° / 178°	178° / 178°	178° / 178°			
	Brightness (typ.)	350 cd/m²	350 cd/m²	250 cd/m²	250 cd/m²			
	Contrast Ratio (typ.)	1000:1	1000:1	1000:1	1000:1			
	Response Time (typ.)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)			
Video Signals	Input Terminals	DisplayPort (HDCP 1.3) x 2, HDMI (HDCP 1.4), DVI-D (HDCP 1.4)		DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin		DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin		
	Output Terminals	-		-		-		
	Digital Scanning Frequency (H / V)	DisplayPort: 31 - 89 kHz / 59 - 61 Hz HDMI: 31 - 89 kHz / 29 - 31 Hz, 49 - 51 Hz, 59 - 61 Hz DVI: 31 - 89 kHz / 29 - 31 Hz, 59 - 61 Hz		DisplayPort: 31 - 76 kHz / 59 - 61 Hz HDMI: 31 - 76 kHz / 49 - 51 Hz, 59 - 61 Hz DVI: 31 - 76 kHz / 59 - 61 Hz		DisplayPort: 31 - 68 kHz / 59 - 61 Hz HDMI: 15 - 68 kHz / 49 - 51, 59 - 61 Hz DVI: 31 - 68 kHz / 59 - 61 Hz		
	Analog Scanning Frequency (H / V)	-		31 - 81 kHz / 55 - 76 Hz		31 - 68 kHz / 59 - 61 Hz		
	Sync Formats	-		Separate		Separate		
USB	Upstream	USB 5Gbps: Type-B		USB 5Gbps: Type-B		USB 5Gbps: Type-B		
	Downstream	USB 5Gbps: Type-A x 4		USB 5Gbps: Type-A x 2		USB 5Gbps: Type-A x 4		
	USB LAN Adapter	-		-		-		
Audio	Speakers	1.0 W + 1.0 W		1.0 W + 1.0 W		1.0 W + 1.0 W		
	Output Terminals	Headphones (Stereo mini jack)		Headphones (Stereo mini jack)		Headphones (Stereo mini jack)		
Power	Power Input	AC 100 - 240 V, 50 / 60 Hz		AC 100 - 240 V, 50 / 60 Hz		AC 100 - 240 V, 50 / 60 Hz		
	Typical Power Consumption	16 W		11 W		10 W		
	Maximum Power Consumption	67 W		44 W		50 W		
	Power Save Mode	0.5 W or less		0.5 W or less		0.5 W or less		
Features & Functions	Preset Modes	User1, User2, sRGB, Paper, Movie, DICOM		User1, User2, sRGB, Paper, Movie, DICOM		User1, User2, sRGB, Paper, Movie, DICOM		
	Automatic Brightness Control	Auto EcoView		Auto EcoView		Auto EcoView		
Physical Specifications	Dimensions (Landscape, W x H x D)	611.7 x 376.3 - 545.3 x 230 mm		531 x 351.4 - 510.1 x 190 mm		537.8 x 333.6 - 473.6 x 233 mm		
	Dimensions (Without Stand, W x H x D)	611.7 x 364.4 x 53.7 mm		531 x 341.9 x 45.5 mm		537.8 x 320.4 x 53.6 mm		
	Net Weight	8.5 kg		5.7 kg		5.9 kg		
	Net Weight (Without Stand)	5.7 kg		3.7 kg		3.4 kg		
	Height Adjustment Range	169 mm		158.6 mm		140 mm		
	Tilt / Swivel	35° Up, 5° Down / 344°		35° Up, 5° Down / 344°		35° Up, 5° Down / 344°		
	Pivot	90° (both clockwise and counter clockwise)		90° (both clockwise and counter clockwise)		90° (both clockwise and counter clockwise)		
	Hole Spacing (VESA Standard)	100 x 100 mm		100 x 100 mm		100 x 100 mm		
Certifications & Standards (Please contact EIZO for the latest information.)	TCO Certified Generation 9, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, UKCA, CB, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC		TCO Certified Generation 9, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, UKCA, CB, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC		TCO Certified Generation 9, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, UKCA, CB, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC			
Dedicated Software	Monitor Control Utility Screen InStyle	Supported		Supported		Supported		
Supplied Accessories (May vary by country. Please contact EIZO for details.)	Signal Cables	DisplayPort (2 m)		DisplayPort (2 m)		DisplayPort (2 m)		
	Others	AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), VESA mounting screw x 4, setup guide		AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), cable cover (EV2456), VESA mounting screw x 4, CD-ROM (PDF user's manual), setup guide		AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), VESA mounting screw x 4, setup guide		
Warranty ¹	5 Years		5 Years		5 Years			
Zero Bright Pixels ²	Yes		Yes		Yes			
Dimensions Drawing (Unit: mm)								

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically.
¹ Usage time is limited to 30,000 hours. ² 6 months from the date of purchase.

		Wide		Square				
Model Variations	With Stand	Black	EV2430-BK	S2133-HBK	S1934-HBK	S1703-AHBK (Height Adjustable Stand)	S1504-TBK	
		Gray	EV2430-GY	S2133-HGY	S1934-HGY	S1703-AHGY (Height Adjustable Stand)	S1504-TGY	
		White	-	-	-	-	-	
	Without Stand	Black	EV2430-FBK	S2133-FBK	S1934-FBK	S1703-AFBK	S1504-FBK	
		Gray	-	-	-	-	-	
		White	EV2430-FGY	S2133-FGY	S1934-FGY	S1703-AFGY	S1504-FGY	
Panel	Type	IPS	IPS	IPS	IPS	TN	VA	
	Backlight	LED	LED	LED	LED	LED	LED	
	Size	24.1" (61.1 cm)	22.5" (57.2 cm)	24.1" (61.1 cm)	21.3" (54 cm)	19" (48.0 cm)	17.0" (43.3 cm)	
	Native Resolution	1920 x 1200 (16:10 aspect ratio)	1920 x 1080 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1600 x 1200 (4:3 aspect ratio)	1280 x 1024 (5:4 aspect ratio)	1280 x 1024 (5:4 aspect ratio)	1024 x 768 (4:3 aspect ratio)
	Viewable Image Size (H x V)	518.4 x 324 mm	488.2 x 297.2 mm	518.4 x 324 mm	432 x 324 mm	374.8 x 299.8 mm	337.9 x 270.3 mm	304.1 x 228.1 mm
	Pixel Pitch / Pixel Density	0.270 x 0.270 mm / 94 ppi	0.275 x 0.275 mm / 93 ppi	0.270 x 0.270 mm / 94 ppi	0.270 x 0.270 mm / 94 ppi	0.293 x 0.293 mm / 87 ppi	0.264 x 0.264 mm / 96 ppi	0.297 x 0.297 mm / 86 ppi
	Display Colors	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	
	Viewing Angles (H / V, typ.)	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°	170° / 160°	
	Brightness (typ.)	300 cd/m²	420 cd/m²	250 cd/m²	250 cd/m²	250 cd/m²	400 cd/m²	
	Contrast Ratio (typ.)	1000:1	1000:1	1000:1	1000:1	1000:1	2500:1	
	Response Time (typ.)	14 ms (gray-to-gray)	6 ms (gray-to-gray)	14 ms (gray-to-gray)	6 ms (gray-to-gray)	5 ms (black-white-black)	23 ms (black-white-black)	
Video Signals	Input Terminals	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin		DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin		DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin		
	Output Terminals	-		-		-		
	Digital Scanning Frequency (H / V)	31 - 76 kHz / 59 - 61 Hz		31 - 76 kHz / 59 - 61 Hz		31 - 64 kHz / 59 - 61 Hz		
	Analog Scanning Frequency (H / V)	31 - 76 kHz / 55 - 61 Hz		24 - 80 kHz / 49 - 76 Hz (1600 x 1200: 59 - 61 Hz)		31 - 64 kHz / 55 - 61 Hz		
	Sync Formats	Separate		Separate, Composite		Separate		
USB	Upstream	USB 2.0: Type-B		USB 2.0: Type-B		USB 2.0: Type-B		
	Downstream	USB 2.0: Type-A x 2		USB 2.0: Type-A x 2		-		
	USB LAN Adapter	-		-		-		
Audio	Speakers	1.0 W + 1.0 W		-		0.5 W + 0.5 W		
	Output Terminals	Headphones (Stereo mini jack)		-		Headphones (Stereo mini jack)		
Power	Power Input	AC 100 - 240 V, 50 / 60 Hz		AC 100 - 240 V, 50 / 60 Hz		AC 100 - 240 V, 50 / 60 Hz		
	Typical Power Consumption	12 W		13 W		9 W		
	Maximum Power Consumption	36 W		45 W		21 W		
	Power Save Mode	0.3 W or less		0.3 W or less		0.5 W or less		
Features & Functions	Preset Modes	User1, User2, sRGB, Paper, Movie, DICOM		User, sRGB, Paper, Movie, DICOM		User1, User2, sRGB, Paper		
	Automatic Brightness Control	Auto EcoView		Auto EcoView		Auto EcoView		
Physical Specifications	Dimensions (Landscape, W x H x D)	552.5 x 368 - 499 x 233 mm		465 x 453 - 535 x 208.5 mm		405 x 406.5 - 506.5 x 205 mm		
	Dimensions (Without Stand, W x H x D)	552.5 x 358 x 56.9 mm		465 x 361 x 64 mm		405 x 334 x 61.5 mm		
	Net Weight	6.7 kg		8.6 kg		5.6 kg		
	Net Weight (Without Stand)	4.3 kg		5.6 kg		3.6 kg		
	Height Adjustment Range	131 mm		82 mm		100 mm		
	Tilt / Swivel	35° Up, 5° Down / 344°		40° Up, 0° Down / 35° Right, 35° Left		30° Up, 0° Down / 35° Right, 35° Left		
	Pivot	90° (clockwise)		90° (clockwise)		90° (clockwise)		
	Hole Spacing (VESA Standard)	100 x 100 mm		100 x 100 mm		100 x 100 mm		
Certifications & Standards (Please contact EIZO for the latest information.)	TCO Certified Generation 8, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, UKCA, CB, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC		TÜV/Ergonomics, TÜV/GS, RCM, CE, UKCA, CB, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC		TCO Certified Generation 8, TÜV/Ergonomics, TÜV/GS, RCM, CE, UKCA, CB, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC			
Dedicated Software	Monitor Control Utility Screen InStyle	-		-		-		
Supplied Accessories (May vary by country. Please contact EIZO for details.)	Signal Cables	DisplayPort (2 m), DVI-D (2 m)		DVI-D (2 m), D-Sub mini 15 pin (1.8 m)		DVI-D (2 m), D-Sub mini 15 pin (1.8 m)		
	Others	AC power cord (2 m), VESA mounting screw x 4 (EV2430-F), setup guide		AC power cord (2 m), USB Type-A - USB Type-B cable (1.8 m), VESA mounting screw x 4 (S2133-F), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/C]), EIZO ScreenSlicer software), setup guide		AC power cord (2 m), audio cable (2.1 m), setup guide		
Warranty ¹	5 Years		5 Years		5 Years			
Zero Bright Pixels ²	Yes		Yes		-			
Dimensions Drawing (Unit: mm)								

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically.
¹ Usage time is limited to 30,000 hours. ² 6 months from the date of purchase.

EIZO Corporation

153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan
Phone +81-76-277-6794

<https://www.eizoglobal.com>

EIZO, the EIZO logo, FlexScan, ColorEdge, CuratOR, RadiForce, DuraVision, Raptor, and ScreenManager are registered trademarks of EIZO Corporation. EIZO ScreenSlicer, Re/Vue, SafeGuard and Screen InStyle are trademarks of EIZO Corporation. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries. DisplayPort and VESA are trademarks of the Video Electronics Standards Association in the United States and other countries. Windows, Microsoft are registered trademarks of Microsoft Corporation in the United States and other countries. DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information. USB Type-C is a registered trademark of USB Implementers Forum, Inc. macOS Sierra is a registered trademark of Apple Inc. ENERGY STAR is a registered trademark of the United States Environmental Protection Agency in the United States and other countries. All other company names, product names, and logos are trademarks or registered trademarks of their respective owners. Some screen images are used with permission from Microsoft. Specifications are subject to change without notice.

Copyright © 2023 EIZO Corporation. All rights reserved. (230402)

