



IFP-0501 Version: 1

5-Port Fast Ethernet PoE Industrial Switch, 4 PoE Outputs, 802.3at/af PoE, 126W, -40°C to 75°C

The LevelOne IFP-0501 Industrial Fast Ethernet PoE Switch provides 4 ports at 10/100M TX PSE to supply power and internet to PoE compatible Powered Devices (PD) in a network setting. The IFP-0501 supplies 15.4 Watts for IEEE802.3af or 30 Watts (Max 36W) for IEEE802.3at per port. With an industrial-standard DIN-rail mount for easy cabinet deployment and metal casing rated to IP30, this ruggedized switch is engineered for installation in industrial settings where humidity, dust, high or low operating temperatures or vibrations could cause standard devices to fail.

Key Features

- Provides flexibility of 4 x 10/100BASE-TX PoE ports
- PoE ports can support the IEEE 802.3at standard and power up 30W devices
- 10/100Mbps, full/half-duplex, auto-negotiation, auto-MDI/MDIX
- -40°C to 75°C operating temperature range
- Provides DIN-rail, wall or desktop mounting
- IP30 metal case
- Redundant power inputs with Terminal Block

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10Base-T Ethernet
 IEEE 802.3u 100Base-TX Fast Ethernet
 IEEE802.3x Flow Control and Back Pressure,
 IEEE802.3af for PoE
 IEEE802.3at for PoE+

Memory:

1M

Buffer Memory:

1M

Connectors and Cabling:

4 x 10/100M TX PSE
 1 x 10/100M TX
 1 x Terminal block

Indicator:

PW1 (Power 1) : Green / PW2 (Power 2) : Green / SW(Relay) : Amber
LNK (RJ45) : Green / PoE link : Amber

Transmission Method:

Store-and-Forward

Power Input:

Dual DC 9V-56V Power Inputs provide power redundancy

9-56VDC Input : switch without PoE

44-56VDC Input: switch with PoE

Power Output:

Alarm Relay Output 1A @ 24VDC

Features

PoE:

Input Voltage 44VDC-56VDC.

PoE power per port 30watts. Maximum 36Watts with 56VDC input.

Maximum total power 126Watts with 56VDC input

Performance

Backplane (Gbps):

1G

MAC Address Table:

1K

Data Transfer Rate:

10/100Mbps

Packet Forwarding Rate:

100Mbps port - 148,000pps

10Mbps port - 14,880pps

Environment

Temperature (°C):

Operating: - 40°C ~ 75°C

Storage: - 40°C ~ 85°C

Humidity (Non-condensing):

Storage: 5% ~ 95%

Operating: 5% ~ 95%

Deployment:

Desk, din rail, wall mount

Physical Specifications

Dimensions (W x D x H mm):

36.2 x 105 x 142 mm

Weight (g):

460 g

Reliability

MTBF:

150,000 hrs at 25°C

Approval and Compliance

EMI/EMS:

FCC, CE, VCCI

Safety:

EN60950-1

Environmental Test:

EN55022/24

EN55011

EN50121-3-2

EN50121-4 (pending)


EN50155 (pending)

EN60068-2-6

EN60068-2-27

EN60068-2-32

Diagram

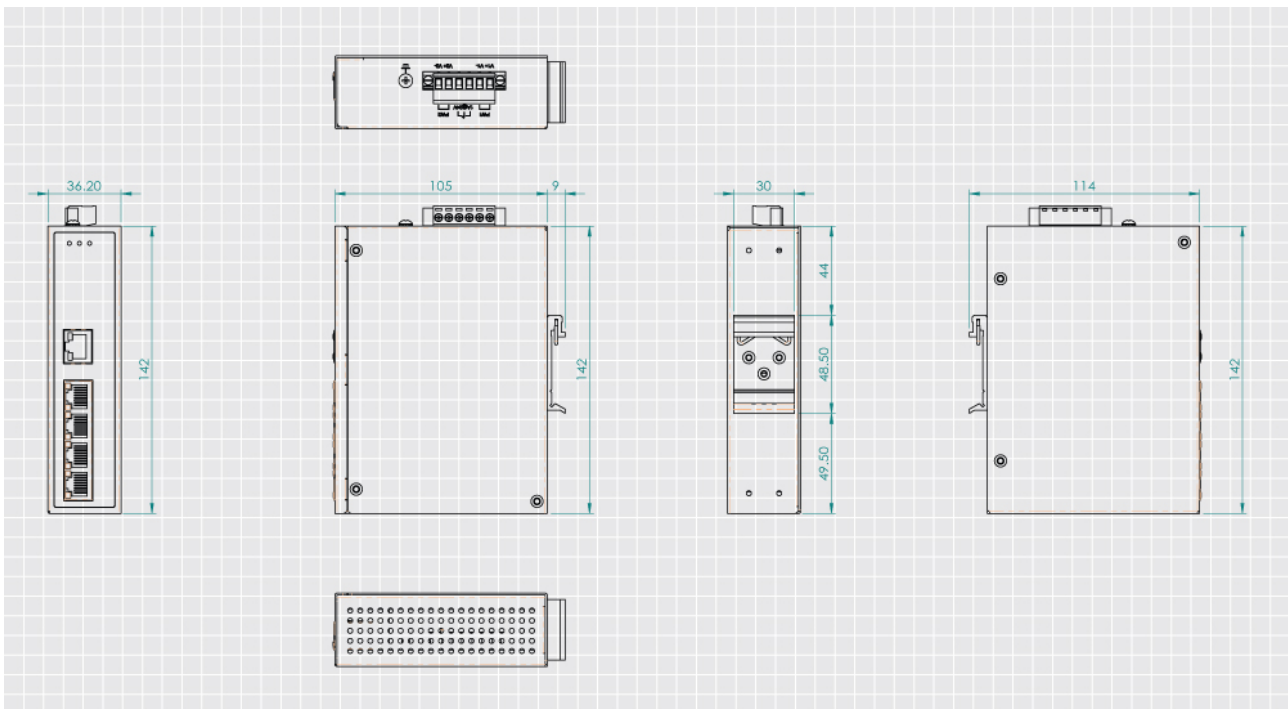

Order Information

IFP-0501

Package Contents

IFP-0501

Power Terminal Block

Quick Installation Guide

Wall Mount Kit

Din-rail Mount Kit



Optional Accessory



POW-2410

Industrial Power Supply, 24V DC, 30W, DIN-Rail



POW-2420

Industrial Power Supply, 60W, 24V DC, DIN-Rail



POW-2430

Industrial Power Supply, 24V DC, 75W, DIN-Rail



POW-2440

Industrial Power Supply, 120W, 24V DC, DIN-Rail



POW-4801

48V DC Power Adapter



POW-4810

Industrial Power Supply, 48V DC, 40W, DIN-Rail, PoE Ready



POW-4820

Industrial Power Supply, 48V DC, 75W, DIN-Rail, PoE Ready



POW-4830

Industrial Power Supply, 48V DC, 85W, DIN-Rail, PoE Ready



POW-4840

Industrial Power Supply, 120W, 48V DC, DIN-Rail, PoE Ready



POW-4850

Industrial Power Supply, 48V DC, 240W, DIN-Rail, PoE Ready



POW-4860

Industrial Power Supply, 48V DC, 480W, DIN-Rail, PoE Ready



POW-5510

Industrial Power Supply, 55VDC, 85W, DIN-Rail