




www.samagears.com

S30 SERIES

Micro ATX Airflow PC Case

USER GUIDE

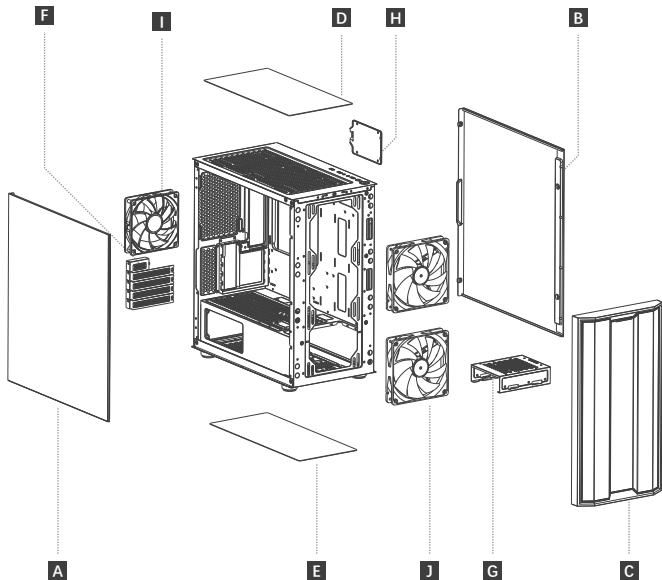

02 Case Overview

A Left Tempered Glass Side Panel

B Right Metal Side Panel

C Front Mesh Panel (with Filter)

D Top Dust Filter

E Bottom Dust Filter

F PCI-E Slot Covers ×4

G 2.5" / 3.5" Drive Cage

H 2.5" / 3.5" Drive Tray

I 120mm ARGB PWM Fan ×1

J 140mm ARGB PWM Fan ×2



Motherboard Screws
×17



Hard Disk Screws
×8



PSU Screws
×6





Cable Ties
×8





Copper pillar Sleeve
×1



Buzzer
×1

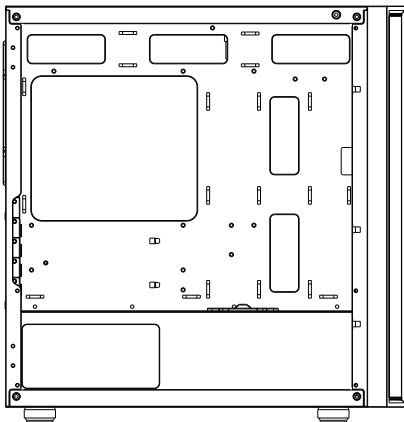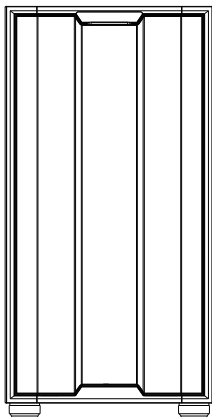


Case dim.	429x215x422mm (L×W×H) 16.9x8.5x16.6inch								
Carton dim.	470*278*480mm (L×W×H) 18.5x10.9x18.9inch								
Motherboard Support	Mini-ITX, Micro ATX								
Expansion Slots	4								
Max.CPU Cooler Height	166mm								
Max.VGA Card(Length)	330mm								
Max. PSU(Length)	200mm								
Net weight	5.7 kg / 12.6 lbs								
Gross weight	6.7 kg / 14.8 lbs								
Fan Support	<table><tr><td>Top</td><td>2×120mm / 2×140mm</td></tr><tr><td>Front</td><td>2×140mm / 3×120mm</td></tr><tr><td>Bottom</td><td>2×120mm (PSU Shrouded)</td></tr><tr><td>Rear</td><td>1×120mm</td></tr></table>	Top	2×120mm / 2×140mm	Front	2×140mm / 3×120mm	Bottom	2×120mm (PSU Shrouded)	Rear	1×120mm
Top	2×120mm / 2×140mm								
Front	2×140mm / 3×120mm								
Bottom	2×120mm (PSU Shrouded)								
Rear	1×120mm								
Radiator Support	<table><tr><td>Top</td><td>120 / 240 / 280mm</td></tr><tr><td>Front</td><td>120 / 240 / 280 / 360mm</td></tr><tr><td>Bottom</td><td>N/A</td></tr><tr><td>Rear</td><td>120mm</td></tr></table>	Top	120 / 240 / 280mm	Front	120 / 240 / 280 / 360mm	Bottom	N/A	Rear	120mm
Top	120 / 240 / 280mm								
Front	120 / 240 / 280 / 360mm								
Bottom	N/A								
Rear	120mm								
Pre-Installed Fans	<table><tr><td>Front</td><td>2×140mm ARGB PWM</td></tr><tr><td>Rear</td><td>1×120mm ARGB PWM</td></tr></table>	Front	2×140mm ARGB PWM	Rear	1×120mm ARGB PWM				
Front	2×140mm ARGB PWM								
Rear	1×120mm ARGB PWM								
Front I/O Ports	USB3.0 Type A x2, USB3.1 Type-C x1, Mic x1, Audio x1								
3.5" Drive Bays	HDD×2								
2.5" Drive Bays	SSD×2 (1 combined with 3.5" mounts)								


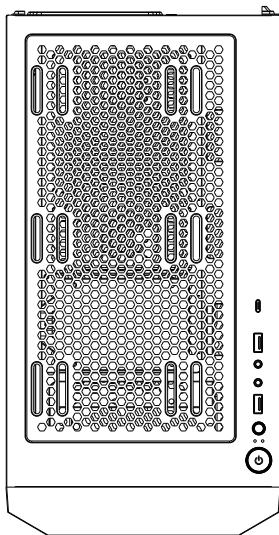


2×120mm


2×140mm





120 / 240 / 280mm

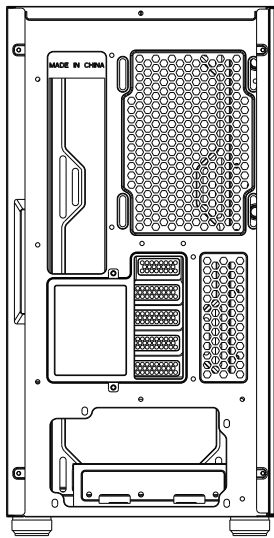

1×120mm




120mm

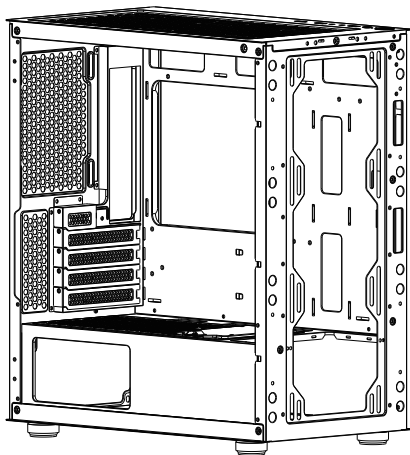



3×120mm

2×140mm




120 / 240 /

280 / 360mm

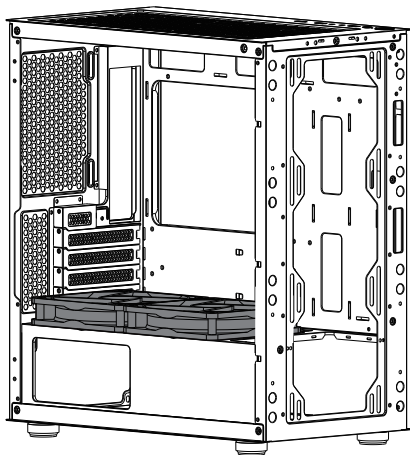



2×120mm


09 Removing The Side Panel

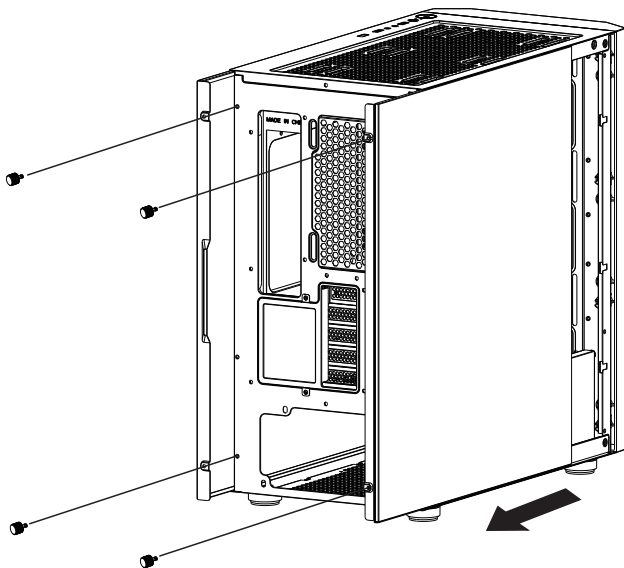

10 Removing The Front Panel


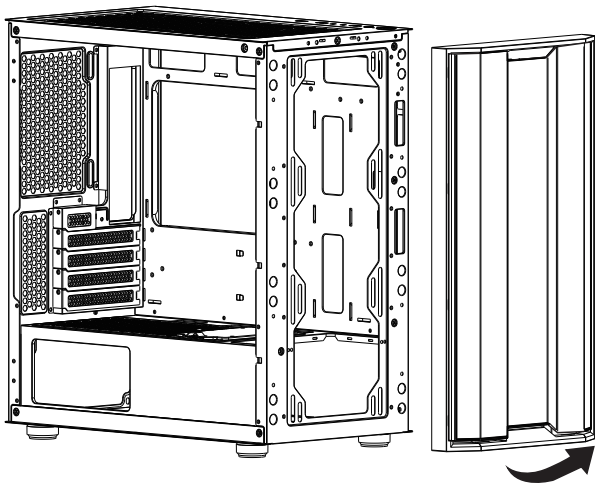


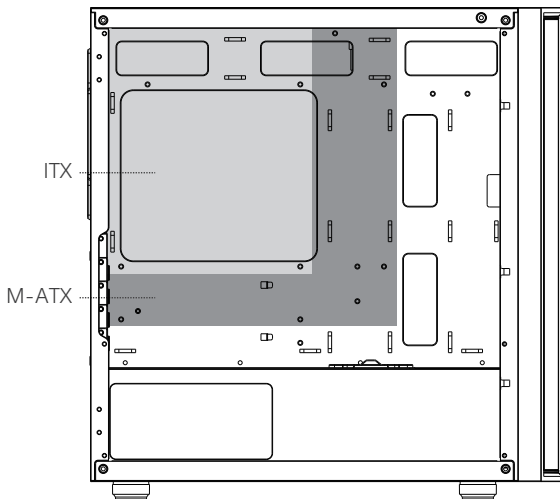

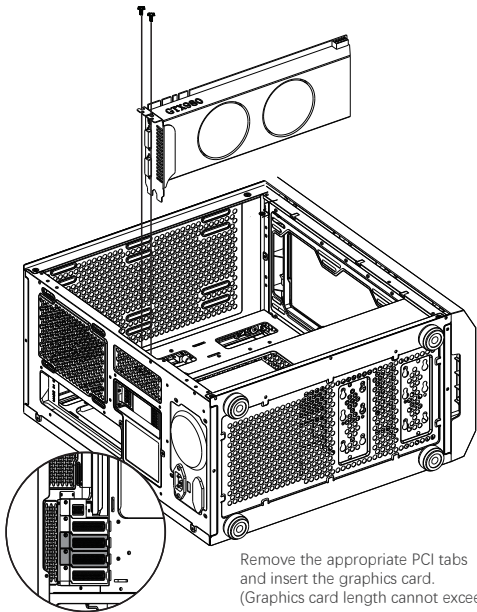


Remove the appropriate PCI tabs
and insert the graphics card.
(Graphics card length cannot exceed 330mm)

13 Installing 2.5"/3.5" Drives

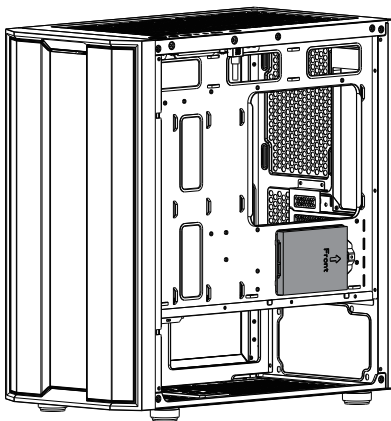



Securing Hard Disks with Motherboard Screws
Go to the SSD cage and install it again
Back to the SSD cage on the back of the motherboard.


14 Installing 2.5"/3.5" Drives

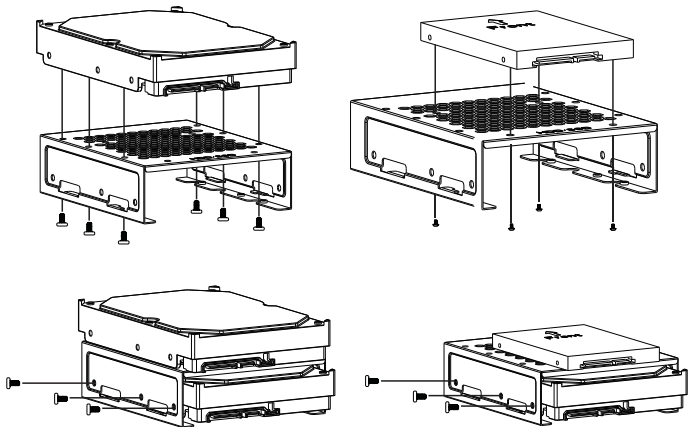


Option 1: Installation of HDD+HDD Hard Disk Drive
Option 2: Installation of SSD+HDD Hard Disk Drive

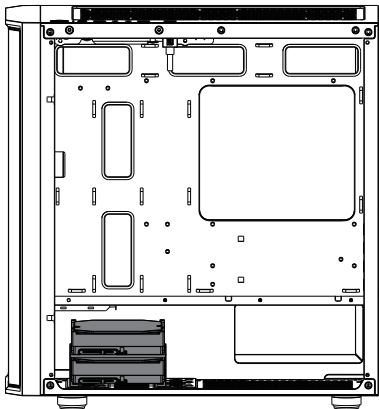


Install the baseboard drive cage with the hard drives installed back into the baseboard drive cage position.

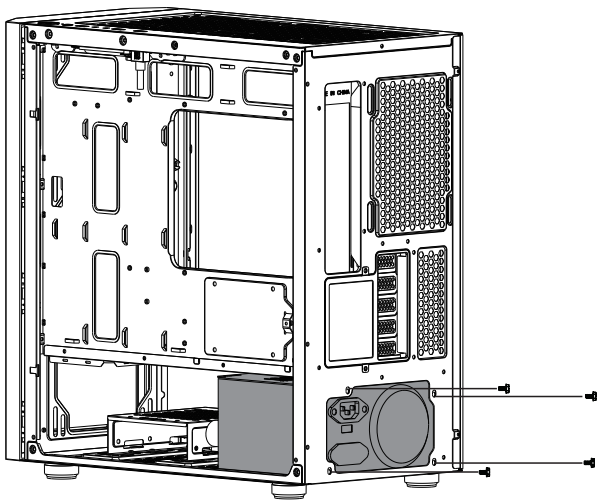


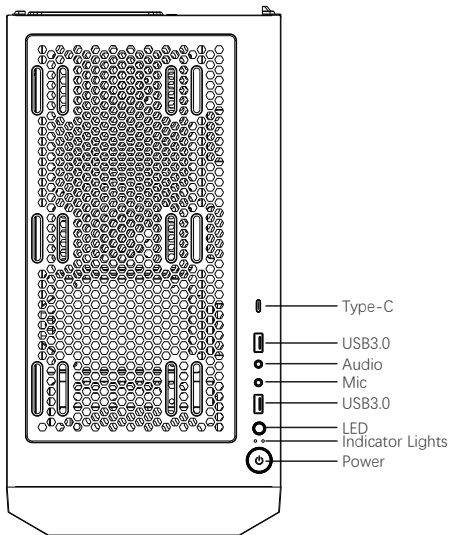


For Motherboards Connectors
to FAN PWM



For AURA Motherboards Connectors
to M/B Arrow to +5V



PH2.0-3PIN LED Connectors




First interface only
(Red terminal)
It can detect fan speed

LED Connectors

4Pin FAN Connectors

LED8 LED7 FAN1 FAN2 FAN3 FAN4 FAN5 FAN6

Connectors
To LED SW



LED Connectors

For reference only, please refer to the real product

