

Equip Basic Flex 19" Freistehender Serverschrank, 42HE, 800x1000mm, mit Glastür, herausnehmbare und abschließbare Paneele, montiert, RAL7035 Grau

Product Images



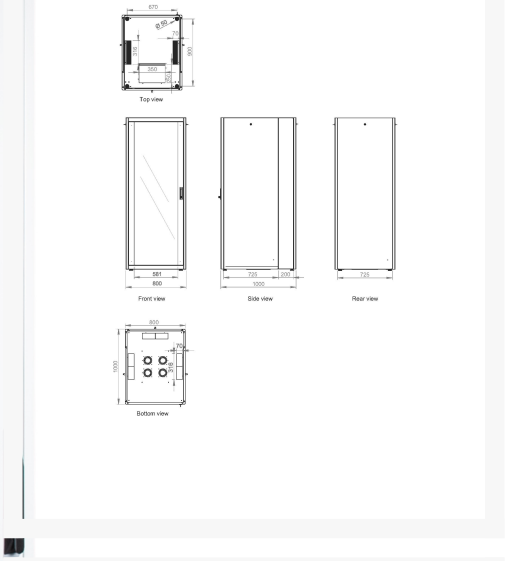

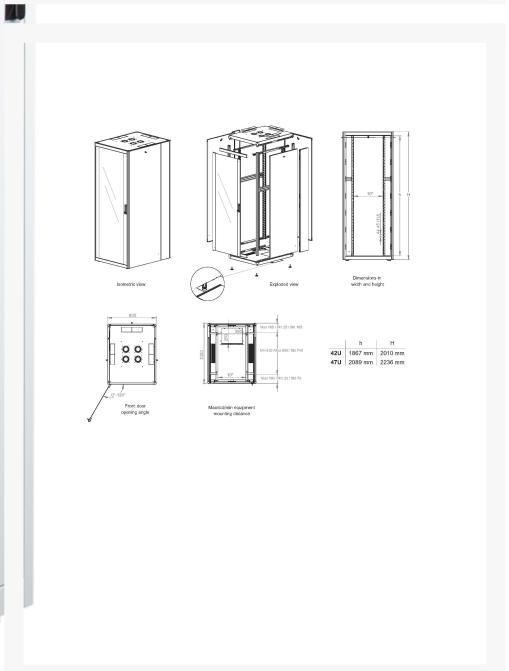

Short Description

- 42U cabinet, designed for optimal performance in every space
- 800X1000MM Server Cabinet
- Ships preassembled for easy setup at your location
- The cabinet comes with a tempered glass frontdoor to provide unmatched strength while maintaining clear visibility
- Sidepanels are removable and lockable
- Backpanel is removable

Description

These cabinets, of the Basic Flex Line, are engineered for the efficient and user-friendly installation of both active and passive network components, prioritizing streamlined cable management. Crafted from steel sheets up to 1.5 mm thick, every cabinet guarantees excellent stability, attributed to a unique plate curving technique, forming a sturdy steel framework. They are finished with a powder coating in shades of grey (RAL 7035) and black (RAL 9005). For challenging set-up locations that are less accessible, the cabinet is designed to be disassembled. The doors are easily detachable, and their stops can be switched between right and left orientations. Additionally, the roof is prepped for the integration of an air ventilation unit. Inside, each cabinet houses two sets (4 pieces) of 483 mm (19") profile rails. These rails, galvanized and marked with height units readable from both directions, are adjustable in depth. To facilitate extensive equipment installations, they're paired with supplementary depth support bars. Cable management is central to the design. The cabinet base features a punched-out cable entry shielded with a metal plate. For the broader 800 mm width cabinets, there are added punched-out cable entries covered with plastic on both sides. These entries are replicated on the roof, with a single one for 600 mm width cabinets and three for the 800 mm width ones. To cater to diverse operational needs, a wide assortment of accessories, including cable management tools and shelves, is readily available.

Additional Information

Wandmontage möglich	Nein
Anzahl der Kartons pro Palette	1 piece
Bruttogewicht der Palette	14200 gram
Bruttovolumen der Paletten	142560 cubic_centimeter
Volumen der Verpackung	102168000 cubic_centimeter
Maximale Anzahl von Stapelkartons	1 piece
Länge der Palette	1080 millimeter
Breite der Palette	880 millimeter
Höhe der Palette	150 millimeter
Handbuch	Ja
Montagesatz	Nein
Maximale Gewichtskapazität	600 kilogram
Schlüsselsperrung	Ja
Material des Gehäuses	Steel
Eingebaute USV	Nein
Rack-Schienen	Ja
Typ des Rahmens	Closed
Einstellung der Füße	30 millimeter
Montage erforderlich	Nein
Schalldicht	Nein
Lenkrollen	Nein
Schrank Typ	Freestanding rack
Höheneinheit	42U
Abnehmbare Hintertür	Nein
Abnehmbare Vordertür	Ja
Maximale Gewichtskapazität auf Rollen	600 kilogram

Konstruktion der Hintertür	Steel
Konstruktion der Vordertür	Tempered glass
Konstruktion der Seitenwände	Steel
Schloss für die Seitenwände	Ja
Schloss für die Hintertür	Ja
Schloss für die Vordertür	Ja
Inklusive Seitenteile	Ja
Dicke der Rack-Schiene	1.5 millimeter
Stabilisierungsfußschraube	Ja
Anzahl der Stabilisierungsfußschrauben	4 piece
Verstellbarer Ständer	Nein
Überwachung	Nein
Haupt-PDU	Nein
Produktdesign	4-Post
Art der Kühlung	Passive
Öffnungswinkel der Tür	200 degree
Abnehmbare Seitenteile	Ja
Anzahl der Lagen pro Palette	1 piece
Bruttogewicht der Palette	132500 gram
Code des Harmonisierten Systems (HS)	853710
Zolltariflicher Warencode (TARIC)	8537109899
Kohlenstoff-Fußabdruck	19.4598 kilogram
Menge pro Palette	1 piece
Einhaltung der Nachhaltigkeit	Ja
Schrauben inklusive	Nein
Wandmontagesatz	Nein
Temperatursensor	Nein

Sockelplatte	Nein
Muttern inklusive	Nein
Erdungsset	Ja
Menge pro Packung	1 piece
Tiefe des Pakets	1080 millimeter
Höhe des Pakets	2150 millimeter
Breite des Pakets	880 millimeter
Kurzanleitung zur Installation	Nein
Gewicht der Verpackung	4500 gram
Einstellbare Füße	Ja
Einstellbare Tiefe	Nein
Kabelmanagement	Nein
Vormontiert	Ja
Inhalt des Pakets	Erdungssatz
Farbe	Light Grey
RAL Code	RAL7035
Modellnummer	EBF-42-8010-G-BAAA
Rail to Rail Länge	19 inch
Produkt Höhe	2010 millimeter
Produkt Breite	800 millimeter
Produkt Tiefe	1000 millimeter
Dicke des Materials	74.5 millimeter
Innere Höhe	1867 millimeter
Innere Breite	795 millimeter
Unterstützte Mindestracktiefe	630 millimeter
Maximal unterstützte Rack-Tiefe	950 millimeter
Innere Tiefe	995 millimeter

Produkt Gewicht	113800 gram