Yuasa Technisches Datenblatt

YBX5075 - YBX 5000 Silver High Performance SMF Batteries

Leistung

Nennspannung	12 V
Kapazität (20 Stunden)	60 Ah
Bewertet mit CCA	620 A



Maße (±2 mm)

Länge	243 mm
Breite	175 mm
Höhe	175 mm

Maße und Gewichte

Gewicht	14.7 kg

Gehäuseeigenschaften

Art des Gehäuses	LB2 DIN
Terminal-Typ	T1
Bodenleiste	B13/B14
Ladezustandsanzeige	Ja
Griffe	Ja
Pol-Entlüftung	Ja
Deckel-Typ	SMF


Technologie

Flammensperre	Ja
Technologie	Ca/Ca
Typ des Separators	PE
VDA-Rollover-Test	Ja
Empfohlener Laderate (A)	4 A
Leistungskennzeichnung	W4-C2-V3-E1


Gehäuseeigenschaften

T1


Standard DIN Post

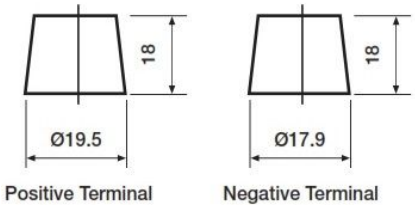

Zellenanordnung

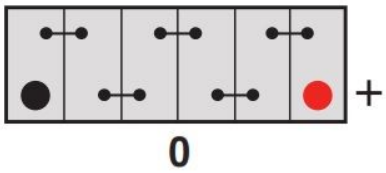

Batteriehalter



YUASA

by GS YUASA

www.yuasa.com

Yuasa Technical Data Sheet

YBX5075 - YBX 5000 Silver High Performance SMF Batteries

Performance

Nominal Voltage	12 V
Capacity (20hr)	60 Ah
Rated CCA	620 A



Dimensions (±2mm)

Length	243 mm
Width	175 mm
Height	175 mm

Weights & Measures

Weight	14.7 kg

Container Features

Case Type	LB2 DIN
Terminal Type	T1
Hold-down	B13/B14
State of Charge Indicator	✔
Handles	✔
End Venting	✔
Lid Type	SMF


Technology

Flame Arrestor	✔
Technology	Ca/Ca
Separator Type	PE
VDA Roll Over Test	✔
Recommended Charge Rate (A)	4 A
Performance Marking	W4-C2-V3-E1


Terminal Type

T1


Standard DIN Post

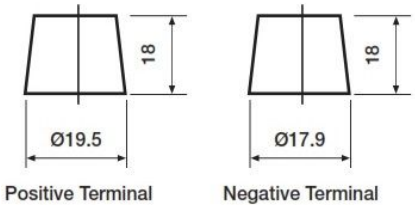

Cell Assembly Layout

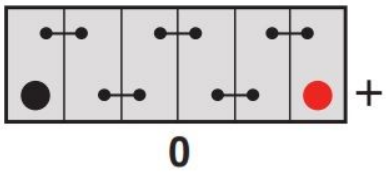

Battery Hold-down



YUASA

by GS YUASA

www.yuasa.com

Data Sheet generated on 14/08/2026 – E&OE