



## Push-switch 1gang 1way

### Functions at a glance

- SP (operating current),
- With N terminal.
- With 2 independent answering contacts.
- With labelling field.
- Labelling field 57.8 x 9.8 mm
- Rated voltage: 250 V~
- Rated current: 10 A
- Protection class (device): IP 44
- Label holder illuminable with illumination insert 2152 NLI-53.
- Push switch illuminable by inserting the lamp 8332-1, 8335-1, 8346-1, 8333-1 and 8358.
- For compatible lettering software, visit [www.BUSCH-JAEGER-labelingtool.com](http://www.BUSCH-JAEGER-labelingtool.com).

### Order details


|                               |                                |
|-------------------------------|--------------------------------|
| <b>Article No.:</b>           | 2621 WN-53-201                 |
| <b>Order No.:</b>             | 2CKA001484A0373                |
| <b>EAN:</b>                   | 4011395993491                  |
| <b>Customs tariff number:</b> | 85365080                       |
| <b>Preisgruppe:</b>           | 12                             |
| <b>Preis:</b>                 | 20,40 EUR plus VAT             |
| <b>Info sheet:</b>            | <a href="#">» Download PDF</a> |

### Downloads


#### Certificates

[» EU-declaration of conformity](#)


### Dimensions

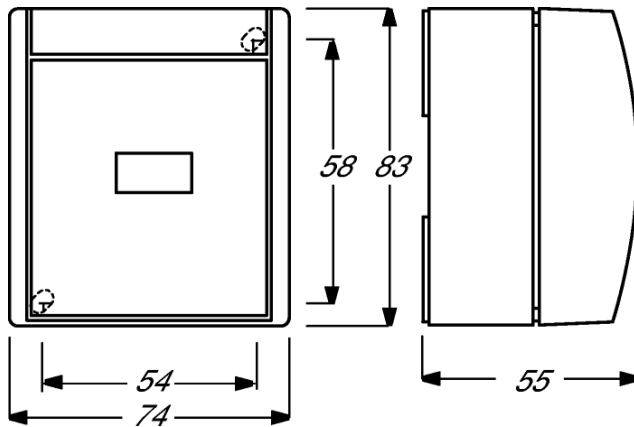

# Wiring diagram

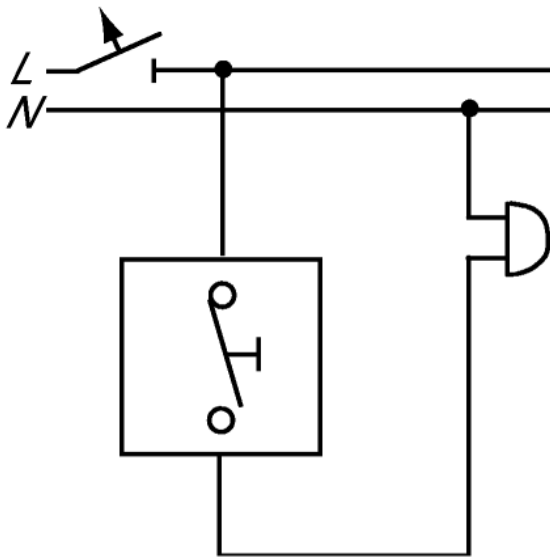

Push switch

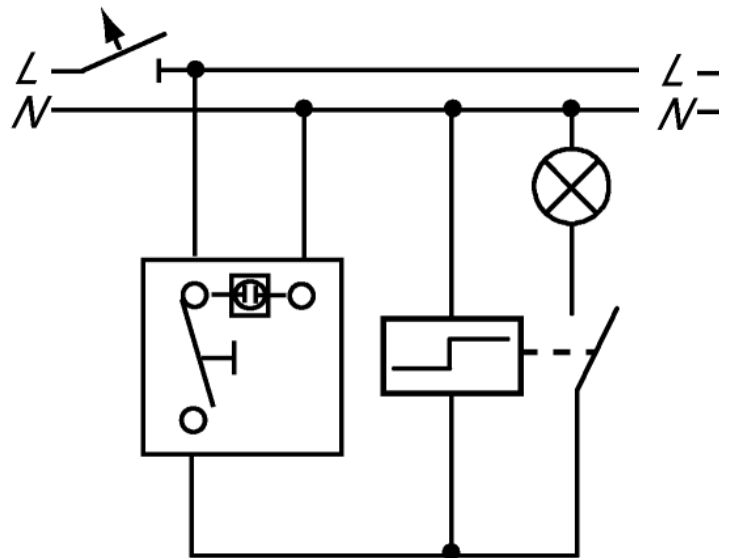

Push switch with relay (with neon indicator)

Push switch