


870-C45 (FX) V2 (MS-7715v1.1) ATX Mainboard

Supports AMD® PhenomII/ Phenom/ Althon II/ Althon/ Sempron processors in AM3+ package.

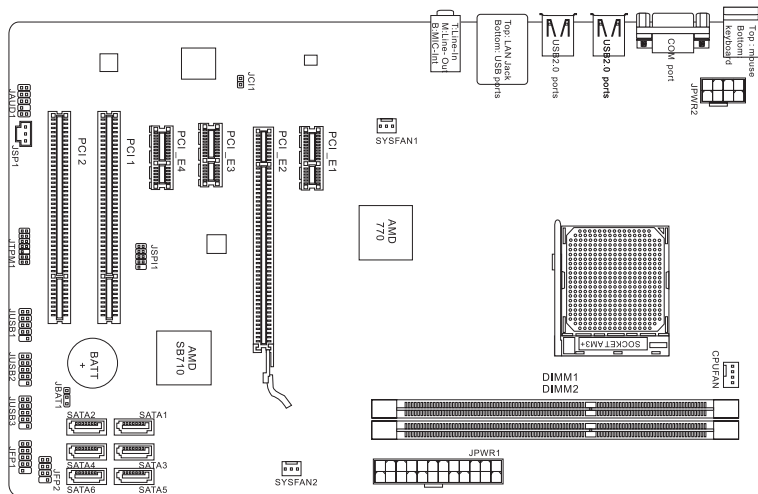

Mainboard Specification

Processor Support	Connectors
■ AMD® PhenomII/ Phenom/ Althon II/ Althon/ Sempron processors in AM3+ package.	■ Back panel - 1 PS/2 mouse port - 1 PS/2 keyboard port - 1 Serial port - 6 USB 2.0 Ports - 1 LAN jack - 3 flexible audio jacks ■ On-Board Connectors - 3 USB 2.0 connectors - 1 SPDIF-Out connector - 1 Front Panel Audio connector - 1 Chassis Intrusion connector - 1 TPM connector
HyperTransport	Slots
■ Supports Hyper Transport(HT) 3.0 Technology	■ 1 PCIE x16 slot ■ 3 PCIE x1 slots ■ 2 PCI slots, support 3.3V/ 5V PCI bus Interface
Chipset	Form Factor
■ North Bridge: AMD® 770 chipset ■ South Bridge: AMD® SB710 chipset	■ ATX (30.5cm X 19.0cm)
Memory Support	Feature on Focus
■ DDR3 800/ 1066/ 1333/ 1600*(OC) SDRAM (16GB Max) ■ Supports Dual-Channel mode)	■ All Solid Cap design ■ Active Phase Switch feature to save power dynamically ■ M-Flash included ■ USB Safeguard
LAN	Mounting
■ Supports LAN 10/100/1000 Fast Ethernet by Realtek® RTL8111E	■ 6 mounting holes
Audio	
■ Chip integrated by Realtek® ALC887 ■ Flexible 8-channel audio with jack sensing ■ Compliant with Azalia 1.0 Spec	
SATA	
■ 6 SATA 3Gb/s ports by AMD® SB710 (SATA1~6)	

These specification is subject to change without prior notice.