




Delock Adapter Mini PCIe > M.2 Key E slot

Description

This Adapter by Delock enables the connection of an M.2 module in 2242, 2230, 3042 or 3030 format. The adapter can be installed into the system through a Mini PCIe interface. Through the predetermined breaking point, the length can be shortened from full size to half size.

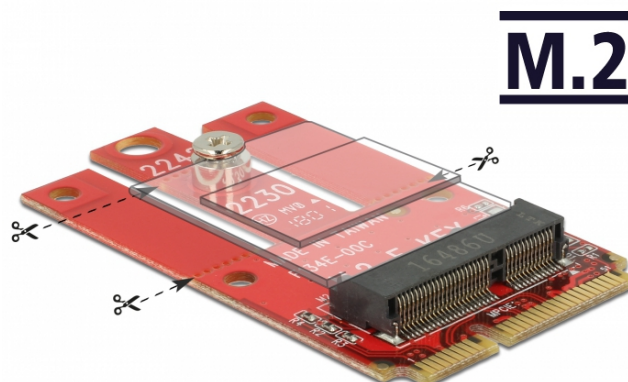

Specification

- Connectors:
 - 1 x Mini PCIe male >
 - 1 x 67 pin M.2 key E slot
- Interface: USB 2.0 / PCIe
- Form factor: Mini PCIe full size / half size
- Supports M.2 modules in format 2242, 2230, 3042 and 3030 with key E or key A+E based on USB / PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Dimensions (LxW): ca. 54 x 30 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 3.2 / Kernel 4.x.x
- Motherboard with a free Mini PCIe slot with a USB / PCIe interface

Package content

- Adapter
- Screws
- User manual

Item no. 63909


EAN: 4043619639090

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images



**General**

Form factor:	MiniPCle full size
	MiniPCle half size
Supported operating system:	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
	ex Linux Kernel 3.3
	ex Linux Kernel 4.x.x

Slot:	PCle
	USB

Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported

Interface

Connector 1:	1 x Mini PCIe male
Connector 2:	1 x 67 pin M.2 key E slot

Physical characteristics

Length:	54 mm
Width:	30 mm