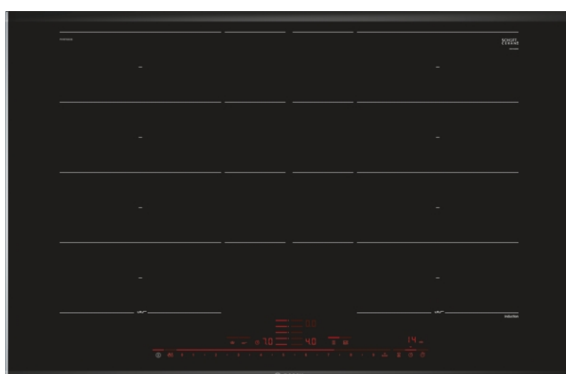


Serie | 8 Hobs**PXY875DE3E**
80 cm Sensor Plus Induction -
ceramic glass base
816 mm**The induction hob with PerfectCook and PerfectFry: achieve optimal results thanks to automatic temperature control.**

- **DirectSelect Premium:** Direct, simple selection of the desired cooking zone, power and additional functions.
- **PerfectFry:** For perfect browning of roasted foods thanks to sensor control with 5 power levels.
- **PerfectCook:** Prevents overcooking and boiling over by precise controlling the cooking temperature.
- **Expanded FlexInduction Zone:** Even more flexibility by connecting the cooking zones into one big zone, which you can make even larger for the big pots.
- **Induction:** Fast, precise cooking, easy cleaning and low energy consumption.
- **ComfortProfil:** Elegant, appealing design with bevelled front and metal strips on the side.
- **PowerBoost:** Up to 50% more power for faster heating.
- **Timer with switch-off function:** Turns off the assigned cooking zone after the set time.

Technical Data

Product name/family :	Cooking zone ceramic
Construction type :	Built-in
Energy input :	Electric
Total number of positions that can be used at the same time :	4
Required niche size for installation (HxWxD) :	51 x 750-780 x 490-500
Width of the product (mm) :	816
Dimensions of the product (mm) :	51 x 816 x 527
Dimensions of the packed product (HxWxD) (mm) :	126 x 603 x 953
Net weight (kg) :	17.0
Gross weight (kg) :	19.0
Residual heat indicator :	Separate
Location of control panel :	Hob front
Basic surface material :	Ceramic
Color of surface :	Alu, brushed, Black
Color of frame :	Alu, brushed
Approval certificates :	AENOR, CE
Length of electrical supply cord (cm) :	110
EAN code :	4242002939216
Electrical connection rating (W) :	7400
Current (A) :	32; 2*16
Voltage (V) :	220-240
Frequency (Hz) :	50; 60

Included accessories

1 x wireless temperature sensor for cooktop

**Optional accessories**

HEZ39050 : Wireless temperature sensor for cooktop

Serie | 8 Hobs

PXY875DE3E

80 cm Sensor Plus Induction - ceramic glass base
816 mm

Quickness:

- PowerBoost function for all zones
- PanBoost

The induction hob with PerfectCook and PerfectFry: achieve optimal results thanks to automatic temperature control.

Design

- Profile trim (front facette with side trim)
- Can be installed with a Bosch domino hob

Special features

- 4 induction cooking zones
- extended FlexInduction zone
- DirectSelect Premium touch control
- Digital display
- MoveMode (3 levels)
- Automatic setting transfer
- Variable 17-stage power settings for each zone
- Timer for all zones
 - Timer - shows how long the cooktop is in use
 - Count up timer per cooktop
- Automatic pan recognition sensor
 - Power management options for 16A, 13A or 10A connection
 - Automatic safety shut off
 - Control panel lock
 - Control panel lock function
- QuickStart function
- ReStart function
- Energy consumption display
- Cable included
- Connection cable (1.1 M)
- Connected load: 7.4 kW

Power and size:

- Cooking zones: 1 x Ø 400 mmx230 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 400 mmx230 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction
- Min. worktop thickness: 30 mm

Safety Features

- 2 stage residual heat indicator for each zone
- Main on/off switch

Control:

- PerfectFry sensor with 5 temperature settings
- PerfectCook sensor
- 1 x wireless temperature sensor for cooktop included.

