




Delock PCI Express x4 Card > 1 x internal NVMe M.2 Key M 110 mm - Low Profile Form Factor

Description

The Delock PCI Express card expands a PC by one M.2 slot. A M.2 SSD in format 22110, 2280, 2260, 2242 and 2230 can be connected.

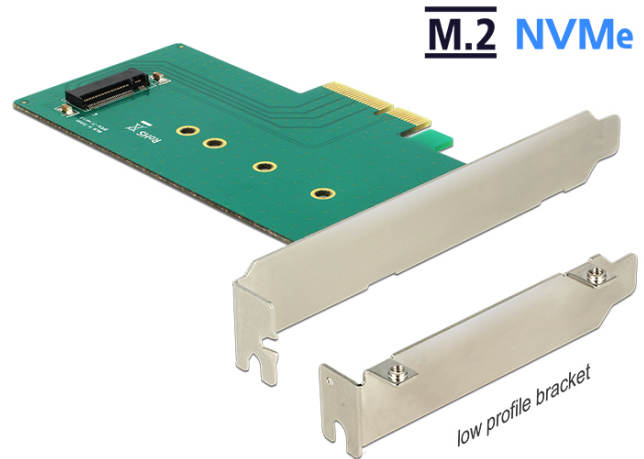

Specification

- Connector:
internal:
 - 1 x 67 pin M.2 key M slot
 - 1 x PCI Express x4, V3.0
- Interface: PCIe
- Supports M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M
- based on PCIe
- Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported
- Data transfer rate up to 39 Gbps
- Supports NVMe Express (NVMe)

System requirements

- Windows 7/7-64/8/8-64/8.1/8.1-64/10/10-64, Linux Kernel 3.19
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- 1 x fixing screw
- User manual

Item No. 89472


EAN: 4043619894727

Country of origin: Taiwan, Republic of China

Package: Box



Images

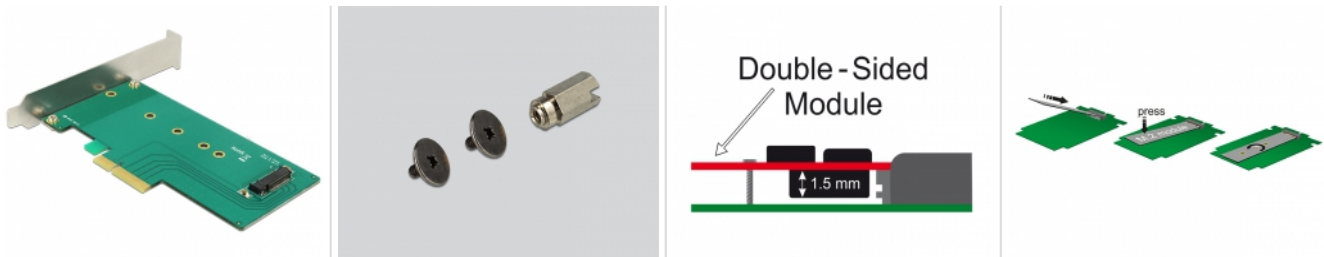



General	
Form factor:	Low Profile
Supported operating system:	Linux Kernel 3.19
	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8 32-bit
	Windows 8 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
Slot:	PCIe
Supported module:	M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
Internal:	1 x 67 Pin M.2 NGFF key M slot
	1 x PCI Express x4, V3.0
Technical characteristics	
Data transfer rate:	up to 39 Gbps